



Contractors

Product Guide

Order online at comtecdirect.co.uk
Call 01480 415414

Global Reach



Founded in 1978 and acquired by ETC Group in 2020, Comtec is the UK's largest value-added distributor of telecom and IP equipment to both the carrier and enterprise markets.

Our Managed Services solution meets long-term supply chain requirements for operators and contractors whilst our Product Distribution solution meets the same or next day delivery requirements for operators, network installers and their subcontractors.

ETC's operations span France, the United States, Germany, Poland, Portugal, Israel, the Dominican Republic, the UK, the Middle East, Far East, and Northwest Africa.



1 billion
sales revenue



Over
14,000
customers worldwide



More than
55,000
SKUs of network materials



Supplying **60+**
carriers in Europe,
Middle East and US



Nearly
1,000
global sourcing and
supply partners



Over
600,000
network product
deliveries per year



11 million
km of fibre distributed
to our customers



Over
2 million sq ft
of warehousing



Dedicated team of
1,200+
employees

Welcome



Established in 1978, we are the UK's leading value-added supplier of telecoms and datacoms infrastructure equipment, tools, test equipment and consumables.



Our product range has evolved to include; fibre optic tooling, blown fibre equipment, and PIA consumables to equip operators, ISP's and their contractors delivering the roll out of FTTx networks worldwide and in the UK.

Today, from our UK headquarters we operate two business divisions:

Comtec Product Distribution

A distribution business stocking 12,000 product lines serving installers of fibre optic and copper networking system on a next day basis. Value added services include:

- ▶ Product Hire
- ▶ Product Finance
- ▶ Tool & Van Kits
- ▶ Calibration, Repair and Service
- ▶ Cable Cutting



Comtec Supply Chain Management

A product sourcing and supply chain outsourcing service for telecoms operators and systems vendors.

We have a menu of services to choose from and combine these to tailor a solution for you, on-time and on-budget:

- ▶ Global product sourcing and procurement
- ▶ Forecasting and inventory management
- ▶ Leading industry brands
- ▶ Process re-engineering
- ▶ Product and batch testing
- ▶ Product design and system integration
- ▶ Technical support
- ▶ Product assembly
- ▶ Cabinet pre-build
- ▶ Logistics



COMTEC ▶
AN ETC GROUP COMPANY

Sales office open 8.00am – 6.00pm, Monday to Friday

Next day delivery on all orders placed before 6.00pm



Ordering

Service and Support

We pride ourselves on exceptional service. Support is available via our experienced sales, project, product and technical teams.

Stock and Availability

We carry a significant stock holding with every product selected for its quality, performance and value and, because we manage our own distribution centre, products are delivered to you without delay.

Easy Ordering

We're on hand Monday to Friday between 8.00am and 6.00pm to take your order, confirm price and delivery details. Orders can also be placed online at

www.comtecdirect.co.uk

Discounts

Discounts are available dependent on order quantity and size of project. Simply call our sales team for further details.

Delivery

Next day delivery to UK Mainland is guaranteed for all orders placed by 6pm (excluding pallets, cable cutting and cabinets) and is Free of Charge on orders over £200*. For timed deliveries and export sales please speak to our sales team.

* Some exclusions apply. Full details available online.

Cable Cutting Services

Cable cutting services are available until 4.30pm where next day delivery is requested (final order time may vary).

Head Office

Orderphone: 01480 415414

Email: fttxsales@comtecdirect.co.uk

Scotland

Orderphone: 0141 564 1234

Email: glasgow@comtecdirect.co.uk

Hong Kong

Orderphone: +852 2311 2263

Email: sales@comtec-comms.com.hk

UAE

Orderphone: +974 4551 0677

Email: uae@comtecdirect.me

Qatar

Orderphone: +974 44 3535 86

Email: qatar@comtecdirect.me

Oman

Orderphone: +968 22 0111 22

Email: oman@comtecdirect.me

Online

www.comtecdirect.co.uk



Carriage Charges

Delivery

Next day delivery is available for all orders placed by 6pm (excluding pallets, cable cutting and cabinets) and is Free of Charge on orders over £200*. For timed deliveries please refer to the table below.

Please note: The below rates apply to UK Mainland orders only and whilst the rates cover the majority of our product range, it is not possible to offer this service on bulky items **.

Order Value	Next Day Delivery	Timed Deliveries		
		Pre 9am	Pre 10.30am	Pre Noon
<£200	£9.95	£30.00	£25.00	£15.00
>£200	FREE*	£30.00	£25.00	£15.00

* Free delivery applies to Comtec account holders and is to kerbside only

** Oversized items POA

For tooling deliveries to Ireland please refer to the table below:

Order Value	Next Day Delivery	Consignments over 30kg, pallets, free standing/server cabinets – competitive delivery pricing – POA
<£500	£9.95	Non-catalogue items ordered may incur a special item order charge – POA
>£500	FREE	

Cabinets

Standard next day delivery of stocked cabinets is included within the price. This is to kerbside only up to 5pm via the National Carrier Network to England, Wales and lower Scotland. The following geographical restrictions apply:

England & Wales

- ▶ Next day delivery when ordered before 3pm Monday - Thurs; or before 1pm Friday

Scotland (delivery charge dependant on location)

- ▶ We offer a best endeavours service to extreme locations, but cannot always guarantee next day delivery

Cable Cutting Services

Cable cutting services are available until 4.30pm where next day delivery is required (Final order time may vary). There will be a £3.50 charge per cable cut for a plywood drum. This will appear as a line item on any cut-to-length cable orders.

Export Sales

For delivery charges outside of the UK Mainland, please contact our Sales Department on +44 (0)1480 415414 or email sales@comtecdirect.co.uk

Payment Options

Payment can be made through your Comtec Trade Account, credit or debit card, or by cash or cheque with your order.



Terms and Conditions

All prices shown are ex-works and are exclusive of VAT which will be charged at the current rate. Comtec reserves the right to alter prices and product specifications without notification. For credit account customers within the UK, payment terms are 30 days from date of invoice. A full set of Comtec's terms and conditions of sale is available by calling 01480 415000. Comtec cannot be held responsible for any consequential losses caused by late delivery, but please be assured that Comtec will be doing everything within its power to ensure a speedy solution.

Key Products



JETTING
The World's Leader in Jetting Technology

Blown Fibre Machines

Page 14 - 17



OPT
Classic of Fiber Technology

OPT Tools

Page 20



VIavi

Fibre Test Tools

Page 42 - 49



INNO INSTRUMENT You connect. We DESIGN

INNO View Fusion Splicers

Page 28 - 31



STICKLERS

Sticklers Cleaning Kit

Page 33



Tents

Page 128



JSP

750mm Cone Mounted
Chester & Sign Kit

Plastic Barriers & Chapter 8

Page 123 - 127



Prysman

A Brand of Prysman Group

HellermannTyton

Closures & Accessories

Page 229 - 237



**BESPOKE
TOOL KITS**
AVAILABLE NOW

See Page 66



Honeywell

Gas Detectors

Page 63



TAIT
TOOLS

Wipes/Cleaning

Page 156



RidgeGear

Ridgegear Safety Harnesses

Page 161-163



FINANCE AVAILABLE

Spread your costs for tooling,
test, splice, blowing equipment.

CONTACT US TO FIND OUT MORE



JSP

JSP PPE

Page 164-166



Continuous Rods

Page 176

Full range of
PIA Install Equipment
available

Contact us for details on 01480 415414
or email: fttxsales@comtecdirect.co.uk



Manhole Lifter 4B

Page 190



Joint Box Keys

Page 193-194

Fibre & Copper
Cabling Solutions

See products online

Microduct & Connectors

Leading Brands



view more brands at
www.comtecdirect.co.uk

Contents

Fibre Optic Cabling 11

Test & Measurement 41

Tools 65

Site Equipment 117

External Cabling 175

Fixings, Fastenings
& Labelling 243

Index 265

NOW OFFERING A RANGE OF TOOL KITS



NEW

TOOL KITS AVAILABLE

Hand tools,
blown fibre,
fibre preparation,
smart metering,
cctv and more....

CONTACT US TO FIND OUT MORE



Customise your own tool and van kits tailored to your needs
for easy ordering and stock management



Tooling

Fibre Preparation

Site Equipment

GDU's

Test Equipment

PPE

A RANGE OF FIBRE PREPARATION TOOLS AVAILABLE



Cable Sheath Stripper Overhead
36F ULW 7mm Sheath Dia 2mm
Sheath Thickness T0158



Fibre Optic Stripping Tool
5 Way FS510



Slippery Fish Fibre Optic
Drop Cable Slitter FOD-2000



Fibre Tube Scoring Tool FTS
(Dia) 1.6-6mm



Fibre Optic Kevlar Scissors



Fibre Optic Stripping Pliers



Fibre Stripper 3A T0199



Microduct & Tube
Cutter 2A TC100



Jacket Stripper
Cable Dia 6mm-28mm



FTTx Flat Drop Cable Slitter
"Twister"



Mid Span
Access Fibre
Optic Slitter



FO-SNC All-in-One
Fibre Optic Stripping & Kevlar Cutting Tool



Armoured Cable Slitter ACS



Fibre Optic Cabling

Prysmian

- 12 - 13 Aerial & Outdoor Fibre Optic Cables
- 13 Blown Fibre

Jetting

- 14 - 17 Blowing Machines and Equipment
- 18 Blowing Equipment Accessories

Kaeser, Lastmile & Rotair

- 19 Compressors

Fibre Tools

- 20 - 27 Fibre Tools

INNO

- 28 - 30 Fusion Splicers
- 31 Cleavers & Accessories
- 32 Splicers Work Tables

Cleaning & Lubricants

- 33 - 39 Cleaning & Lubricants

Splicing, Termination & Fixings

- 39 Fibre Optic Consumables
- 40 Fibre Optic Splice Protectors

Hellermann Tyton

- 40 Fibre Transport Tubing
- 40 Sleeving & Spiral Wrap



Prysmian Ultra Lightweight (ULW) Fibre Optic Aerial Drop Cable

Prysmian

A Brand of Prysmian Group

Designed as an ultra lightweight (ULW) cable for mid to long span aerial applications. It is suitable for aerial and/or duct applications and can be used with power cables under 11kV rating.

For Clamps
see page 217

- For use on the PIA network
- Singlemode G657A1 fibre
- Brass plated steel wire strength members
- Max breaking load: 4F to 24F 1800N - 36F & 48F 2000N
- Up to 68m span distance (ice and wind variable)
- Available in multiple fibre options
- For 4F, 12F or 24F ULW use drop fibre anchoring clamps, 830464
- For 36F & 48F ULW use drop fibre dead end clamp, 818157



Loose Tube



Multi-Loose Tube

Item	Description	Construction	Mode	Fibres	Sheath	Diameter	Colour	UoM	Price
829813	Fibre Optic Aerial Drop Cable	ULW Loose Tube	SM	4F	HDPE	6mm	Black/Yellow	Mtr	POA
821669	Fibre Optic Aerial Drop Cable	ULW Loose Tube	SM	12F	HDPE	6mm	Black/Yellow	Mtr	POA
829677	Fibre Optic Aerial Drop Cable	ULW Multi-Loose Tube	SM	24F	HDPE	6mm	Black/Yellow	Mtr	POA
828340	Fibre Optic Aerial Drop Cable	ULW Multi-Loose Tube	SM	36F	HDPE	7mm	Black/Yellow	Mtr	POA
821670	Fibre Optic Aerial Drop Cable	ULW Multi-Loose Tube	SM	48F	HDPE	7.1mm	Black/Yellow	Mtr	POA
830726	Fibre Optic Aerial Drop Cable	ULW Micromodule	SM	96F	HDPE	7.1mm	Black/Yellow	Mtr	POA




INNO INSTRUMENTS
You dream WE DESIGN

INNO Splicers
Available Online

Ultra Lightweight (ULW) Fibre Optic Aerial Drop Cable

Designed to be used with access, distribution, city network and FTtx applications

- For use on the PIA network
- HDPE black with yellow stripe external grade sheath
- Brass plated steel wire strength members
- Breaking force <2000N



Item	Description	Construction	Mode	Fibres	Sheath	Diameter	Colour	UoM	Price
832909	Fibre Optic Aerial Drop Cable	ULW Loose Tube	SM	4F	HDPE	6mm	Black/Yellow	Mtr	POA
830598	Fibre Optic Aerial Drop Cable	ULW Multi-Loose Tube	SM	12F	HDPE	7mm	Black/Yellow	Mtr	POA
830599	Fibre Optic Aerial Drop Cable	ULW Multi-Loose Tube	SM	24F	HDPE	7mm	Black/Yellow	Mtr	POA
830696	Fibre Optic Aerial Drop Cable	ULW Multi-Loose Tube	SM	36F	HDPE	7mm	Black/Yellow	Mtr	POA
830697	Fibre Optic Aerial Drop Cable	ULW Micromodule	SM	48F	HDPE	7mm	Black/Yellow	Mtr	POA

dura-line

Comtec, a Dura-Line partner

Call 01480 415414 for your microduct requirements



OS2 Fibre Cables - External Blown Fibre

A range of external HDPE sheathed fibre cable for blown duct installations.

- HDPE external grade sheath
- Multi-loose tube construction for high core counts
- Suitable for blown fibre installations
- G657.A1 singlemode fibre




Item	Description	Mode	Fibres	Type	Core Size	Sheath	Diameter	Colour	UoM	Price
834077	Micro Blown Fibre Cable	SM OS2	12F	G657A1	250µm	HDPE	5.3mm	Black	Mtr	POA
832252	Micro Blown Fibre Cable	SM OS2	24F	G657A1	250µm	HDPE	5.3mm	Black	Mtr	POA
829145	Micro Blown Fibre Cable	SM OS2	48F	G657A1	250µm	HDPE	5.3mm	Black	Mtr	POA
829146	Micro Blown Fibre Cable	SM OS2	96F	G657A1	250µm	HDPE	5.9mm	Black	Mtr	POA
829147	Micro Blown Fibre Cable	SM OS2	144F	G657A1	250µm	HDPE	8.5mm	Black	Mtr	POA
829148	Micro Blown Fibre Cable	SM OS2	288F	G657A1	250µm	HDPE	9-11mm	Black	Mtr	POA
830123	Micro Blown Fibre Cable	SM OS2	144F	G657A1	200µm	HDPE	5.5mm	Black	Mtr	POA
830124	Micro Blown Fibre Cable	SM OS2	192F	G657A1	200µm	HDPE	6.8mm	Black	Mtr	POA
830125	Micro Blown Fibre Cable	SM OS2	288F	G657A1	200µm	HDPE	8.2mm	Black	Mtr	POA

OS2 Fibre Cable - External Duct

A range of external HDPE sheathed fibre cable for push/pull duct installation.

- HDPE external grade sheath
- Multi-loose tube construction for high core counts
- Suitable for traditional push/pull installations
- G657.A1 singlemode OS2 fibre



Item	Description	Construction	Mode	Fibres	Type	Core Size	Sheath	Diameter	Colour	UoM	Price
829149	Duct Fibre Cable	Multi-Loose Tube	SM OS2	96F	G652SD	250µm	HDPE	12.8mm	Black	Mtr	POA
830296	Duct Fibre Cable	Multi-Loose Tube	SM OS2	48F	G657A1	250µm	HDPE	7.9mm	Black	Mtr	POA
830298	Duct Fibre Cable	Multi-Loose Tube	SM OS2	96F	G657A1	250µm	HDPE	9.8mm	Black	Mtr	POA
830299	Duct Fibre Cable	Multi-Loose Tube	SM OS2	144F	G657A1	250µm	HDPE	12.1mm	Black	Mtr	POA
830300	Duct Fibre Cable	Multi-Loose Tube	SM OS2	288F	G657A1	250µm	HDPE	15mm	Black	Mtr	POA

Prysmian Blown Fibre OS2

Colour coded outer layer identifies the grade of in the unit

- Blowing distances up to 1000m (750m for 12 core)
- Fibres already installed can be removed and replaced with a higher fibre count
- Once removed, the fibres can be re-used at another site



834325



809518

Prysmian

A Brand of Prysmian Group

Item	Description	Mode	Fibres	Type	Diameter	UoM	Price
826324	Blown Fibre Unit (EPFU)	SM OS2	8F	G652D	1mm	Reel of 2km	POA
826328	Blown Fibre Unit (EPFU)	SM OS2	8F	G652D	1mm	Reel of 4km	POA
826304	Blown Fibre Unit (EPFU)	SM OS2	12F	G652D	1mm	Reel of 1km	POA
809518	Blown Fibre Unit (EPFU)	SM OS2	12F	G652D	1.3mm	Reel of 2km	POA
809519	Blown Fibre Unit (EPFU)	SM OS2	12F	G652D	1mm	Reel of 4km	POA
834325	Blown Fibre Unit (EPFU)	SM OS2	4F	G657A1	1mm	Reel of 2km	POA
831051	Blown Fibre Unit (EPFU)	SM OS2	12F	G657A1	1.3mm	Reel of 2km	POA



VOHD MJET

Extremely compact jetting machine with electrical operation for cable dimensions between 0.5 and 6mm and duct dimensions 16mm.



V2 MJET

Robust and compact model with pneumatic operation for cable dimensions between 2.4mm -16mm and duct dimensions between 7-50mm.



V3 MJET

Pneumatically-operated jetting machine for larger dimensions for cable dimensions between 10 and 40mm.



TRIGGAIR

A robust handheld fibre blowing unit. Battery powered operation for cables 1-3mm and ducts 5 and 7 mm.



LAST MILE PETROL

- Flow rate 270l/min/9.5cfm
- Pressure 10 bar/145psi



KAESER
KOMPRESSOREN

KAESER ICOMP3 ELECTRIC

- Flow rate up to 160 l/min
- Pressure up to 11 bar



ROTAIR

ROTAIR VRK20

- Free air delivery 1000L/min/35cfm
- Max pressure 15 bar/218psi



KAESER
KOMPRESSOREN

KAESER M17

- Flow rate 1000l/min
- Working pressure 15 bar

The perfect companion to
VOHD MJET

The perfect companion to
V2 MJET & V3 MJET

To find out more details about Blowing Machine Compressors, see pg 19

VOHD MJet Blowing Machine

Extremely compact jetting machine with electrical operation for cable dimensions between 0.5 - 6.5mm and duct dimensions up to 16mm

- Electrically operated. Battery connected
- Allows installation in a larger duct with a smaller compressor
- The motor does not consume any airflow itself
- Electronic stopping/slipping protection within 250 ms
- Display for current speed, distance, cable force and pressure
- Max. speed: 85 m/min
- Max. pushing force on cable: 200N
- Weight 2Kg



Item	Description	Type	Max Pressure	Pushing Force	Cable Diameter	Duct Diameter	Price
829542	MJet VOHD Machine	Electric	16Bar	200N	0.5-6.5mm	3-16mm	POA

FINANCE AVAILABLE ON JETTING PRODUCTS - SPEAK TO OUR SALES TEAM

V2 MJet Blowing Machine

Robust and compact model with pneumatic operation for cable dimensions between 2.4mm - 16mm and duct dimensions between 7-50mm

- Pneumatic operation, operated by compressor power alone
- Digital display counter for speed and distance
- Gentle operation with long contact surface area on the cable
- Display for speed, distance, cable force and air pressure
- Max. speed: 200m/min,max. pushing force on cable: 550 N
- Continuously variable contact pressure
- Air connection claw fitting
- Weight 10.5Kg



Item	Description	Type	Max Pressure	Pushing Force	Cable Diameter	Duct Diameter	Price
832329	MJet V2 Machine	Pneumatic	20Bar	550N	2.4-16mm	7-50mm	POA

V3 MJet Blowing Machine

Pneumatically-operated jetting machine for larger dimensions for cable dimensions between 4-40mm and duct dimensions between 10-40mm

- Pneumatic operation, operated by compressor power alone
- Use with 15 bar compressor
- Digital display counter for speed and distance
- Gentle operation with long contact surface on the cable
- Display for speed, distance, cable force and pressure in duct
- Max. speed 120 m/min,max pushing force on cable 1200 N
- Outlet connector - CLAW
- Continuously variable contact pressure
- Weight 22Kg



Item	Description	Type	Max Pressure	Pushing Force	Cable Diameter	Duct Diameter	Price
819906	MJet V3 Machine	Pneumatic	20Bar	1200N	4-30mm	10-50mm	POA

TriggAir MJet Fibre Blowing Machine

A robust handheld fibre blowing unit. Battery powered operation for cables 1-3 mm and ducts 5 and 7 mm

- Electrically operated. Battery connected
- Fibre security by mechanical clutch and adjustable clamping force
- Forward and reverse
- Digital display showing speed and distance
- Max. speed: 150 m/min
- Max pushing force: 30N
- Speed control



AVAILABLE TO HIRE
TRY BEFORE YOU BUY
AVAILABLE TO HIRE

Item	Description	Type	Max Pressure	Pushing Force	Cable Diameter	Duct Diameter	Price
827809	MJet TriggAir	Electric	8-10 Bar	30N	0.5-3mm	5-7mm	POA
827820	Reel Arm Kit	Electric	-	-	-	-	POA
827819	Tripod	Electric	-	-	-	-	POA



JetLogger

Documentation system for blown fibre in ducts

The Jetlogger documents several key parameters in one single report. The user enters details describing the job name, cable type & duct type. The Jetlogger will then automatically log the temperature, the humidity, and the exact location by GPS. It also monitors every metre, the air pressure, speed, distance and pushing force used. All measurement parameters are displayed live on the tablet giving the user a full overview of the process.

THE JETLOGGER – FOR USE WITH
VOHD, V2 AND V3 MACHINES*

*Cannot be retro-fitted to machines which are not hardware prepared



NEED ASSISTANCE?

01480 415414 (Head Office)

0141 564 1234 (Glasgow)

Y Block

Y block for blowing a second cable into a duct which already contains an existing cable

- Supplied with 25mm jaws as standard
- Additional jaws for further sizes are available
- A 25mm tube is connected between jetting machine and Y block
- Max pressure 30Bar
- Weight 3Kg

NEW & IMPROVED



Item	Description	Duct Size	Price
832082	Y-Block for Blowing 2nd Cable	25/32m	POA

Cable Blowing Tips

Often referred to as bullets, these tips are designed to reduce snagging when blowing cable into a microduct

- Available for 1.8-16mm cable



Item	Description	Cable Dia	UoM	Price
821527	Blowing Tips	1.8mm	Pk of 10	POA
821528	Blowing Tips	2mm	Pk of 10	POA
821529	Blowing Tips	3.5mm	Pk of 10	POA
821530	Blowing Tips	4mm	Pk of 10	POA
821531	Blowing Tips	4.5mm	Pk of 10	POA
821532	Blowing Tips	5mm	Pk of 10	POA
821533	Blowing Tips	5.5mm	Pk of 10	POA
821535	Blowing Tips	6mm	Pk of 10	POA

Item	Description	Cable Dia	UoM	Price
821536	Blowing Tips	6.5mm	Pk of 10	POA
821537	Blowing Tips	7mm	Pk of 10	POA
821538	Blowing Tips	7.5mm	Pk of 10	POA
821539	Blowing Tips	8mm	Pk of 10	POA
821540	Blowing Tips	9mm	Pk of 10	POA
821541	Blowing Tips	10mm	Pk of 10	POA
821542	Blowing Tips	16mm	Pk of 5	POA

Fibre Optics

Microduct Lubricating Projectiles (Sponges)

Sponges for the lubrication of microducts prior to cable blowing

- Available for microducts with inside diameters from 3.5-35mm



Item	Microduct ID	UoM	Price
821545	3-5.5mm	Pk of 20	POA
821546	7-11mm	Pk of 20	POA
821547	8-12mm	Pk of 20	POA

Item	Microduct ID	UoM	Price
821548	14-21mm	Pk of 10	POA
821549	17.5-27mm	Pk of 10	POA
821550	22-35mm	Pk of 10	POA

Blown Fibre Cable & Duct Lubricants

Lubricants to aid with blowing cable into ducts & microducts

- Prelube 2000 suitable for lubricating fibre cable and ducts
- Prelube 5000 suitable for lubricating micro fibre cable and microducts
- FTx Spray Lubricant for fibre drops is quick and easy to use. Simply spray or wipe the cable or conduit



Item	Description	Volume	Price
821552	Prelube 2000 Duct Lubricant	950ml	£12.40
828128	FTx Spray Lubricant	950ml	£12.44
821551	Prelube 5000 Microduct Lubricant	240ml	£15.32

Hose Assemblies for Fibre/Cable Blowing

High quality hose assemblies designed for use between blowing machines and compressors

- 3/8" Hose with Cejn to Cejn connectivity. Perfect for use between the Jetting V0 blowing machine and our Last Mile compressors (Petrol, and Electric)
- 3/4" Hose with Claw to Claw connectivity. Perfect for use between the Jetting V1/V3 blowing machines and our Rotair VRK200 Compressor



827697



819535



820321

Item	Description	Type	Pressure	For Machine	Compressor	Length	Price
827697	1/4" Air Hose	Euro Bayonet Male to Female	20 Bar	Triggair/VOHD	i. Comp 3 Electric	10Mtr	POA
819535	3/8" Air Hose	Cejn-Cejn	20 Bar	Triggair/VOHD	LM7010 Petrol	10Mtr	POA
820321	3/4" Air Hose	Claw-Claw	20 Bar	V2 & V3	VRK20/M17	10Mtr	POA

i.Comp 3 240V Electric Oil Free Compressor

i.Comp 3 compressors offer outstanding durability and performance. Their compact, easy to handle design make them idea for mobile applications

- No air receiver required
- Delivers up to 11 bar
- Dependable start-up even with 150m power cable
- i.Comp 3 portable weighs just 25kg for exceptional portability
- i.Comp 3 mobile weighs 29kg and is ideal for covering longer distances with durable wheels




Item	Description	Connector Type	Price
825668	i.Comp 3 Series Mobile (with trolley)	Series 25	POA
833362	i.Comp 3 Series Portable	Series 25	POA

Fibre Optic Blowing Compressor (Petrol)

Petrol compressor designed for use with fibre blowing machines

- 9.5CFM (270 litre per minute) air flow rate
- 145psi (10bar) Max. pressure
- V - Configuration oil-less compressor pump
- Oil free air production
- Tankless design
- Cast aluminium construction
- Unique connecting rod system for perfect balance
- Heat-treated components for longer life
- Stainless steel valves



Item	Description	Mfr Ref	Connector Type	Price
817523	Fibre Blowing Compressor Petrol Engine Driven	LM7010	Cejn	POA

M17 Cable Blowing Machine Compressor

This self-contained unit allows the need for separate ancillary aftercoolers and extra connection hoses

- Flow rate: 1000L /min
- Working pressure: 15 bar
- Fuel tank capacity: 20l
- Dimensions: 1200mm-1500mm(L) x 800mm(W) x 780mm(H)
- Weight: 192Kg



Item	Description	Connector Type	Price
825653	M17 Petrol Compressor C/W aftercooler	Claw	POA

VRK20 Cable Blowing Compressor (Petrol)

The Rotair VRK20 is a portable compressor designed for cable blowing. With safety and efficiency in mind, it is designed to meet the requirements for cable blowing installations.

- Built in aftercooler
- Automatic optimum air flow delivery
- Max operation pressure 15bar/218psi
- Working pressure 13bar/188psi
- Free air delivery 1000l/min 35cfm
- Minimum working pressure 5.5bar 80 psi



Item	Description	Mfr Ref	Connector Type	Price
828690	Cable Blowing Compressor	VRK20	Claw	POA

Fibre Optics

ULW Overhead Cable Stripper



OPT stripper with a profiled cassette that slits the cable sheath

- A profiled roller, located either side of the rotary blade ensures the internal cable elements are not damaged during the stripping operation
- Handle locking mechanism ensures the stripper remains closed during the sheath stripping



Item	Description	Mfr Ref	Price
814187	1F-24F ULW Cable Stripper (6mm)	T0159 ●	£107.00
820213	Replacement Cassette for T0159	T0138 ●	£69.44
814854	4F-96F ULW Cable Stripper (7mm)	T0158 ●	£126.52
820212	Replacement Cassette for T0158	T0137 ●	£69.45
809682	36F ULW Cable Stripper (7mm)	T0166 ●	£134.29
835027	Replacement Cassette for T0166	T1036B ●	£69.45

Blown Fibre Tube Intercept Cutter



The cutter performs both a circumferential and longitudinal sheath cut to expose the multi-tubes within a 6x 4.5mm 7 blown fibre tube bundle. One or more tubes can be cut and connectorised to other tube(s) for diverse routing



Item	Description	Price
814786	T0133 BFT Intercept Cutter	£122.09

12F COF250 Flat Drop Cable Stripper



The stripper makes two longitudinal parallel slits in the sheath on one side of the flat drop cable, the outer sheath portion can then be 'peeled' away to expose the cable element

- Suitable for 'Slippery Fish' COF250, SST dropcable or 12F flat drop fibre cable



Item	Type	Mfr Ref	Price
825715	12F COF250 Flat Drop Cable	T0183	£108.86

Minicable Sheath Stripper



- The yellow label signifies 7.2mm diameter cable (typically a 96f Prysmian cable)
- The green label is used on a 6.5mm diameter cable (typically a 72f Corning or 96f Sterlite cable)
- Supplied with 2 cassettes (7.2/6.5mm) yellow/green label



Item	Description	Mfr Ref	Price
820208	COF205 Minicable Stripper	T0168	£166.90

Copper Hybrid Cable



The OPT tool separates the web joining the Blown Fibre Droptube (BFD) and copper element (containing a twisted pair) enabling the individual components to be terminated at both distribution pole and the customer's premises



Item	Description	Mfr Ref	Price
814150	Web Separating Tool	T0162	£104.83
826438	Replacement Cassette	T0135	£69.45

Jumper Cable Sheath Stripper



Longitudinal cable sheath stripper designed for 3mm fibre jumper cable



Item	Description	Mfr Ref	Price
820211	3A Fibre Stripper	T0199	£35.91

Cable Stripping Tool (VCST)



The Verticasa Cable Stripping Tool (VCST) is typically used in multi dwelling units or office fibre cabling systems where extractable fibre cables like the Prysmian Verticasa cable range have been installed. It is used to create a longitudinal window cut on the cable. The window cut will allow to access the fibre modules inside the cable



Item	Description	Price
800901	Verticasa Cable Stripping Tool	£87.83

Longitudinal Window Stripping Tool for Riser Cables



To create a longitudinal window cut in multi core riser cable

- Also suitable for HDPE cables with a GRP strength member
- Now with depth height marker



Item	Type	Price
829034	Longitudinal Window Stripping Tool	£89.59
829651	Spare Blade	POA

Kabifix Jacket Stripper

The Kabifix jacket stripper effortlessly cuts the outer insulation sheath from cables and wires from 6 to 28mm

- The cutting blade automatically changes from circular to longitudinal mode for the safe damage free removal of insulation without the use of additional cutting tools
- The replaceable hardened steel blade has an adjustable cutting depth making this a versatile tool for fast and effective stripping and cutting



Item	Description	Price
990067	Kabifix Jacket Stripper	£43.93
991874	Replacement Blade	£13.13

Dropfibre Butterfly Stripper

Dropfibre stripping tool for overhead fibre cables 12F and 36F, ideal for the fast and safe removal of the outer sheath for dropwire cables

- Precisely calibrated blade guarantees no damage to the internal optical fibres



Item	Description	Colour	Price
806645	12F Dropfibre Splitter	Yellow	£17.51
806646	36F Dropfibre Splitter	Red	£18.27

Fibre Optic Mid Span Access Slitter

Designed to provide easy access to optical fibres in loose buffer tubes

- Suitable for tube sizes from 1.5-3.3mm diameter
- Precision grooves prevent damage to the fibre within the tube
- Easy to use with squeeze and pull operation



Item	Description	Price
808374	Mid Span Access Fibre Optic Slitter	£17.39

Tube Cutter 2A



Tube/hose cutter ideal for cutting blown fibre tubing

- Lightweight and simple to use with a see-saw action
- Hardened and tempered steel blades



Item	Description	Mfr Ref	Price
100061	Microduct & Tube Cutter	TC100	£3.46

Fibre Optics

Fibre Stripper



Tri-Hole stripping tool. Factory calibrated to remove 2-3mm jackets, 900µm and 250µm buffer coating.

- Spring action handles
- Lock to hold tool closed when not in use
- V-Notch jaw type
- Comfort grip



Item	Description	Mfr Ref	Price
816179	3-in-1 Fibre Optic Stripping Tool	FS203	£11.75

5-Way Fibre Optic Stripper



Durable fibre stripping tool with 5 useful stripping positions

- 250µm, 900µm, 2-2.4mm, 2.8-3mm, & 2-3mm



Item	Description	Price
830219	Fibre Optic Stripping Tool	£32.38

Fibre Optic Stripper Pliers



3-position stripping pliers for stripping wires and optical fibers

- Standard fibre from 250 to 125µm
- Sealing buffer coatings from 900 to 250 µm
- Fibre sheaths from 2 to 3mm



Item	Description	Length	Price
832865	Fibre Optic Stripping Pliers	130mm	£20.80

Fibre Optic Stripper Pliers



3-position stripping pliers for stripping wires and optical fibers

- Standard fibre from 250 to 125µm
- Sealing buffer coatings from 900 to 250 µm
- Fibre sheaths from 2 to 3mm



Item	Description	Length	Price
832866	Stripping Pliers TPR Handle	138mm	£24.98

Premium Kevlar Scissors



These premium quality scissors are perfect for cutting kevlar & aramid strength members. The sharp blades are made of high carbon molybdenum and vanadium steel to ensure maximum longevity

- Ergonomic non-slip handle made from nylon & TPR
- Powerful & precise cutting action

**PREMIUM
QUALITY**



Item	Description	Price
833052	Fibre Optic Kevlar Scissors	£14.10

Kevlar Scissors



For cutting Kevlar strength members and aramid yarn in fibre optic cables

- Lightweight and compact
- Ergonomic handles



Item	Description	Mfr Ref	Price
100149	Steel Kevlar Scissors	SK100	£8.11

MS-6 Mid-Span Slitter Tool

The Jonard MS-6 mid span slitter with 6 precision grooves provides easy access to optical fibres in loose buffer tubes 1.2 - 3.3mm diameter without damage to the fibre. The blades are replaceable

- Groove sizes:- 1.2-1.5mm, 1.5-1.8mm, 1.8-2.1mm, 2.1-2.5mm, 2.5-2.9mm and 2.9-3.3mm
- Specified for use on the OFS EZ-Bend 3.0mm cable
- Works on PPC semiflex 3mm



Item	Description	Mfr Ref	Price
821241	Mid-Span Slitter Tool	MS-6	£60.98
821246	Replacement Blades	MSB-1533	£26.88

MS-26 Mid-Span Slitter Tool

The Jonard MS-26 mid span slitter opens fibre jackets and loose buffer tubes to provide easy fibre access. It works on cables or buffer tubes ranging in size from 2.9 to 6.8mm in diameter. Its 5 precision grooves are identified on the top of the tool

- Groove Sizes:- 2.9-3.6mm, 3.6-4.4mm, 4.4-5.2mm, 5.2-6mm & 6-6.8mm
- Works with OFS EZ-Bend 3.0 and 4.8mm drop cables



Item	Description	Mfr Ref	Price
821242	Mid-Span Slitter Tool	MS-26	£68.52
821245	Replacement Blades	MSB-2968	£30.03

MS-326 Mid Span Slit & Ring Tool

The MS-326 is designed to provide easy entry to optical fibres in slim-walled cable with a 5mm to 10mm diameter jacket. A new ring feature has been added to the tool to make it even more versatile

- Consists of 5 precision slitting grooves and 5 precision ring grooves ranging in size from 5mm to 10mm
- One side of the tool performs radial/ring cuts and the other side slits the cable (longitudinal cut)



Item	Description	Mfr Ref	Price
835228	Mid Span Slit & Ring Tool	MS-326	£91.68

CSR-1575 Cable Strip & Ring Tool

The CSR-1575 is designed to slit and ring cables, buffer tubes and jackets on fibre optic cables up to 7.5mm in diameter. The tool features an easily adjustable slit blade and ring blade as well as a removable and reversible V block that improves slitting performance and accommodates smaller to larger diameter cables

- Suitable for cable diameters 1.2mm-7.5mm



Item	Description	Mfr Ref	Price
821250	Cable Strip & Ring Tool	CSR-1575	£16.33
821254	Replacement Blade	CSR-2	£7.65

JIC-4366 Cable Slitter & Ring Tool

Cable sheath slitter used to ring-cut many types of tight buffer, loose tube buffer, breakout cables and other types of jacketed fibre cables. Depth of the cut has two adjustments for 0.46 mm or 0.78 mm thick plastic, rubber or fabric insulation, and can handle cable diameters from 4.7-12.7mm

- One spare blade of each style is included with the tool



Item	Description	Mfr Ref	UoM	Price
821251	Slitter & Ring Tool	JIC-4366	Each	£55.92
821252	Blades (Radial/Ring)	RB2060/6	Pk 6	£7.45
821253	Blades (Longitudinal)	RB2878/6	Pk 6	£7.45

Slippery Fish Fibre Optic Drop Cable Slitter

The Slippery Fish (FOD speed slitter) is used to safely prepare flat fibre optic drop cables typically found in fibre-to-the-home networks

- Simplifies the slitting of drop cable jackets at the end of the cable or mid-span
- Slits on both sides of the jacket allowing easy access to the fibre or strength member



Item	Description	UoM	Price
806726	Slippery Fish Cable Slitter	Each	£40.44
814858	Replacement Blades	Pk of 5	£2.55

Fibre Optics

FOK Fibre Optic Kevlar Cutter



Designed to cut Kevlar strength members in fibre optic cables

- Powerful quick cutting action
- Full serrated edge for consistent, fast and clean cuts
- Lightweight and compact
- Return spring designed for precise repeated cuts
- Ergonomic handles with cushioned non-slip grips
- Made of high carbon steel specially treated for long life and trouble free cuts



Item	Model	Description	Length	Price
782394	36495	Kevlar Cutter	146mm	£18.87

KS-1 Fibre Optic Kevlar Cutter



Lightweight shears for cutting Kevlar or aramid yarn from fibre cables

- Ergonomic moulded handles
- One micro-serrated blade reduces slippage



Item	Model	Description	Price
997773	80671	Steel Kevlar Shear	£14.24

All-in-One Fibre Optic Stripping & Kevlar Cutting Tool



The Miller all-in-one fibre stripping tool combines jacket stripping, fibre stripping and the trimming of aramid yarn (Kevlar) all within a single compact tool

- Strips jacket sizing from 1.6-3mm diameter
- Strips 900µm buffer down to 250µm buffer coating
- Strips 250µm coating down to 125µm fibre
- Kevlar trimming tool located on the cutting side and slides out



Item	Model	Description	Price
820461	81430	All-in-One Stripping & Cutting Tool	£101.95

Buffer Stripper



Original Miller 10A tool used for stripping 250µm buffer coating from 125µm optical fibre

- Precision diameter hole & V-opening in blade allow for accurate buffer coating removal
- Pivot pin, spring and precision handles enhance tool functionality and durability



Item	Model	Description	Mfr Ref	Price
996354	80355	Buffer Stripper	FO-103-S	£31.26

Buffer & Jacket Strippers

Dual and triple hole buffer and jacket strippers

- Spring action handles return jaws to open position when not in use
- 998134 - Dual hole for stripping 2-3mm jackets and standard 250µm buffer coating to expose 125µm clad fibre
- 782396 - Dual hole for stripping 2-3mm jackets and standard 125µm fibre stripping (250µm removal to 125µm)
- 782393 - Tri-Hole for stripping 2-3mm jackets, removal of 900µm tight buffer to 250µm buffer coating and standard 250µm to 125µm



Item	Model	Description	Style	Buffer	Price
998134	46107-M	Dual Hole Fibre Buffer & Jacket Stripper	CFS-2	250µm	£19.62
782396	80676	Dual Hole Fibre Buffer & Jacket Stripper	FO 103-D-J	250µm	£33.46
782393	80677	Tri Hole Fibre Buffer & Jacket Stripper	FO 103-T-250-J	900µm & 250µm	£54.35

All Purpose Cable Slitter Tools

Designed to perform accurate ring and longitudinal cuts

- Designed for cables between 5mm - 12mm
- Blade insert trays to cater for 0.4mm, 0.5mm and 0.6mm sheath thickness



831802



834571



832547



Ribbon	Description	Mfr Ref	Fibre Size	Price
831802	Cable Slitter Kit	MB02-7001	-	£79.90
834571	Ribbon Insert	MB02-7-1055300	144F-288F	£23.49
832547	Ribbon Insert	MB02-701450300	432F - 864F	£23.49

ACS/ACS2 Armoured Cable Slitters



Professional grade tool ideal for slitting the corrugated copper, steel or aluminium armour layer on fibre feeder, central tube, stranded loose tube fibre optic cables and other armoured cables

- ACS Gold Wheel - 8-28.6mm Diameter
- ACS2 Red Wheel - 4-10mm Diameter
- Versatile design allows jacket or shield slitting on non-fibre optic cables as well
- Tool slits outer cable jacket and armour in one operation




Item	Description	Mfr Ref	Price
810637	Armoured Cable Slitter	ACS	£92.59
812750	Armoured Cable Slitter	ACS-2	£90.71

MSAT-5 5-Channel Mid-Span Access Tool



The MSAT 5 mid-span access tool is designed to allow easy access to the fibres in multiple tube sizes, all with no adjustments or die changes

- Includes 5 channels for tubes ranging from 1.6-3mm
- Locking mechanism ensures the tool will remain closed during operation

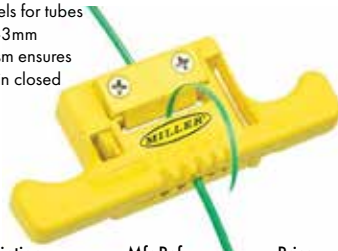

Item	Description	Mfr Ref	Price
821266	Mid-Span Access	MSAT-5	£73.32

Twister Flat Drop Cable Slitter



Miller's FTtx drop cable slitter has a patent-pending design that slits both sides of flat drop cable jackets on end or mid-span applications and allows for precise, safe and easy access to fibre buffer tubes

- Unique articulating hinge allows accurate stripping without disassembling the tool
- Shielded blades promote safe operation, preventing cuts and lacerations
- Ergonomic design with convenient opening tabs fitting comfortably in the hand
- Comes with two reversible blades and two additional replacement blades stored within the tool body
- Very lightweight tool, requires minimal effort and made from a durable polymer construction
- Also known as a Slippery Fish tool



Item	Model	Description	Cable Width	Cable Height	Jacket Thickness	UoM	Price
820490	MB04-7000	FTTx Flat Drop Cable Slitter	7.7mm-8.9mm	3.9mm-4.7mm	0.76mm-1mm	Each	£29.69
825278	MB04-7020	FTTx (ULW) Overhead Cable Slitter	11mm	-	-	Each	£31.26
820492	MB04-7500	Replacement Blades	-	-	-	Pk of 4	£6.39

Fibre Optics

MSAT-16 16 Channel Mid-Span Access Tool



The MSAT-16 is designed to easily size and access fibres in loose tube cables 16 diameter settings ranging from 1 to 3mm diameters in mid-span applications

- Convenient built-in sizing channels quickly determine proper setting for a wide variety of loose tube cables
- Features a self-aligning, easy-to-load buffer tube channel that supports & guides the tube through precision shaving operation



Item	Model	Description	Price
812763	MB01-7000	MSAT 16 Mid-Span Tool	£76.38

MSAT 3-Channel Mid-Span Access Tool



The MSAT is used to quickly and easily access fibres in 2mm, 2.5mm and 3mm buffer tubes in a mid-span location without damage to fibre. No blade adjustment is necessary, as the factory precisely mounts the blades in the tube slitting channels, resulting in consistent and accurate slitting

- Sizing channels on the tool body determine the proper diameter channel
- Spring-loaded lever opens the tool body & remains flush when the tool is closed



Item	Model	Description	Price
788225	80785	MSAT 3 Mid-Span Tool	£187.06

MSAT All Access Tool Kit



The MSAT all access tool kit gives the user a selection of 5 tools in a handy foam lined plastic case

- Kit includes; Stripper FO103S
- Kevlar Shears KS-1
- Hard Jacket Stripper PCS-114
- Buffer Tube Scorer FTS
- Mid Span Access Tool MSAT-16



Item	Model	Description	Price
818921	MA03-7000	MSAT All Access Tool Kit	£203.78

IET Fibre Optic Connector Insertion/Extraction Tool



Deep reaching insertion and extraction tool for LC, SC, MU and MTRJ fibre optic connectors

- Easily inserts and extracts fibre optic connectors in high density patch panels
- Tool tip design insures positive gripping without slipping
- Ergonomic grips
- Left or right hand operation



Item	Model	Description	Price
821267	80860	Insertion/Extraction Tool	£25.85

FTS Fibre Scoring Tool



This handy tool enables the user to score buffer tubes in one simple step, eliminating the need for multiple tools

- This unique tool scores buffer tube sizes from 1.6-6mm
- No blade adjustment as steel blade is pre-fixed at the factory
- Acetal polymer plastic body makes tool strong and durable



Item	Description	Mfr Ref	Price
814789	Fibre Scoring Tool	FTS	£14.05

25mm Duct Cutter



The MC02-7000 is designed to make a clean, square and burr-free ring cuts in plastic fibre duct and microduct up to 25mm diameter. Ideal for cutting or scoring PVC, CPVC, HDPE and other plastic tubing or sheath whilst protecting the fibre inside

- Blade made of SK5 steel, heat treated and nickel plated
- Safety lock to close and open tool
- ABS plastic body



Item	Model	Description	Price
831715	MC02-7000	25mm Duct Cutter	£24.84

Microduct Collet Locking Tool



5 Piece collet release tool set for quick connect fittings and valves

- Sizes 3/16", 1/4", 5/16", 3/8" & 1/2"



Item	Description	Mfr Ref	Price
821249	Collet Locking/Release Tool Set	ICLT/2	£5.24

Straight Tweezer

Stainless steel fine grade tweezers



Item	Description	Length	Price
995143	Straight Tweezer	114mm	£1.97

Tweezers

CK tweezers made from hardened carbon steel with fine nickel plating



- Fine, blunt tips milled together
- 2mm or 3.5mm wide options
- Anti-magnetic to prevent damage



Item	Description	Type	Price
784811	2mm Tweezers	Fine Blunt Tips	£9.62
784812	3.5mm Tweezers	Blunt Tips	£10.52

PLCC Extraction Tool

For removing PLCC type devices from their sockets

- Prevents damage to the IC packaging and socket
- Easy to use, simply squeeze the tool handle to extract



Item	Description	Price
784825	PLCC Component Extractor	£4.95

LC Connector Extraction Tool

LC extraction tool designed to allow simple removal of LC duplex, simplex and pigtail connectors

- Specifically engineered jaws fits all LC connector types
- Lightweight, compact design easily fits in the pocket



Item	Description	Price
804824	Extraction Tool	£10.95

Microduct Rounding Tool

To round microducts after cutting and before adding a connector. Can be used with microducts that have internal diameters of 2.1, 3.5 and 8mm



Item	Description	UoM	Price
808373	Microduct Rounding Tool	Pack of 4	£3.61



INNO Fusion Splicer Line Up

For all splicing needs

Active Clad Alignment

Core Alignment

Ribbon



Mini M7



View 3 Pro



View 5 Pro



View 8 Pro



View 12R Pro

View Pro Solution

Smart IoT Fusion Splicers
+ Cloud Management System

BE IN COMPLETE CONTROL OF YOUR ASSETS AND MANAGE YOUR
INNO FUSION SPLICERS REMOTELY

AVAILABLE
FINANCE
AVAILABLE

FINANCE AVAILABLE ON INNO PRODUCTS



IN ASSOCIATION WITH GENESIS CAPITAL

SPEAK TO OUR SALES TEAM

Mini M7 Fusion Splicer

The INNO Mini M7 is an active clad-alignment splicer with an ultra-portable design

- Active V-Groove clad alignment splicing method
- Lightweight and easy to handle
- 4.3" colour LCD touch screen with user friendly intuitive GUI
- Outstanding magnification up to 400x
- Double tapping zoom in and out
- Supplied with adjustable strap hanger



V10 Pro
Cleaver
Included

Item	Description	Type	Price
829277	Mini M7 Fusion Splicer	Active V-Groove	POA

View 3 Pro Fusion Splicer

The View 3 Pro is a smart active clad alignment fusion splicer with a cloud based operation & management system

- Supplied with V10 Pro cleaver
- Built-in IoT module for mobile data communication
- Web-based, real-time operation system
- Active V-Groove clad alignment splicing method
- The highest magnification and resolution
- 5" Colour LCD touch screen
- Double tapping (zoom in & out)
- Detachable SoC holder and heating oven
- 3 Bright LEDs for dark environment
- Ceramic clamp for improved durability

Note: for full IoT cloud management functionality a sim is required (see 833205)



Item	Description	Type	Price
834390	View 3 Pro Fusion Splicer	Active V-Groove	POA

View 5 Pro Fusion Splicer

The View 5 Pro is a smart core alignment fusion splicer with a cloud based operation & management system

- Supplied with V10 Pro cleaver
- Built-in IoT module for mobile data communication
- Web-based, real-time operation system
- Core alignment splicing with DACAS profiling system
- The highest magnification and resolution
- 5" Colour LCD touch screen
- Double tapping (zoom in & out)
- Fast heating time
- Detachable SoC holder and heating oven
- 3 Bright LEDs for dark environment
- User friendliest interface with built-in videos

Note: for full IoT cloud management functionality a sim is required (see 833205)



Item	Description	Type	Price
834391	View 5 Pro Fusion Splicer	Core Alignment	POA

View 8 Pro Fusion Splicer

The View 8 Pro is a premium core alignment fusion splicer with a cloud based operation & management system

- Supplied with V10 Pro cleaver
- Built-in IoT module for mobile data communication
- Web-based, real-time operation system
- Precise fibre core alignment technology
- Active asset & work management platform
- 5" Colour HD touch screen
- Double tapping (zoom in & out)
- User friendliest interface with built-in videos
- Ultra high capacity battery
- High definition CMOS
- Advanced multi-core industrial CPU

Note: for full IoT cloud management functionality a sim is required (see 833205)



Item	Description	Type	Price
833968	View 8 Pro Fusion Splicer	Core Alignment	POA

Fibre Optics

View 12R Pro Ribbon Splicer

The View 12R Pro is designed for use with Ribbon fibre cable, and has a cloud based operation & management system

- Supplied with V10 Pro cleaver, and TS Pro thermal stripper
- Built-in IoT module for mobile data communication
- Web-based, real-time operation system
- Motorized clamp alignment system
- The highest magnification and resolution
- 5" Colour LCD touch screen
- Double tapping (zoom in & out)
- Ultra-high capacity battery
- The fastest working time
- Universal single fibre holder



Note: for full IoT cloud management functionality a sim is required (see 833205)

Item	Description	Type	Price
834392	View 12R Fusion Splicer	Ribbon Fibre	POA

5 Year IoT Sim for Pro Series Cloud Management

Make the most out of you INNO Pro Series fusion splicer with an integrated sim card and data allowance package

- No contract - 5 Year sim validity
- Full compatability and extensive network coverage
- Technical support - for when help is needed



Make the most out of your View Pro Solution with the integrated sim card and data allowance

A HASSLE-FREE SOLUTION

Don't worry about the data usage, contracts, topping up or management

- 5-YEAR COVERAGE**
Active services longer than the warranty
- NO CONTRACT**
One off payment is all it takes
- FULL COMPATIBILITY**
100% compatible with your local network
- NO ADMIN**
We will take care of any SIM management
- TECHNICAL SUPPORT**
We are there when help is needed
- NO TOP-UPS**
We will never run out of data

Item	Description	Subscription	Price
833205	View Pro Series Active Management IoT Sim	5 Year Subscription	£200.00

Fusion Splicer Gold Warranty 5 Year



Extended warranty for INNO View 3, View 5 and View 7 fusion splicers

- Covers all service, repairs and calibration costs for 5 years
- Fulfilled by INNO approved UK Service Centre
- Call for more details



Item	Description	Price
787205	Fusion Splicer Gold Warranty 5 Year	POA

RN-PRO Ribboniser



Glue-free tool for arranging individual fibres into the ribbon fibre holder

- Supplied with 12F holders
- Suitable for 200µm & 250µm fibre



Item	Description	Price
830786	Ribboniser with 12F Holders	£300.00

V10 Pro Cleaver



Fully automated cleaver with auto blade rotation and height adjustment

- Single action operation
- Auto blade rotation, max 60,000 cleaves
- Digital cleave counter
- Auto trash bin
- Drop proof design
- Maintenance free



Item	Description	Price
833195	V10 Pro Cleaver	£595.00

B-77 Replacement Cleaver Blade



Replacement cutting blades for use with INNO cleaver

- B-77 suitable for VF-15, VF-15H, VF-78, V7, V7+ and V10 Pro
- Cutting Position: 16 Points
- Blade life: 48,000 times



Item	Description	Price
802505	B-77 Cleaver Blade	£73.88

Mechanical Fibre Optic Cleave Tool

High quality precision fibre cleave tool including sharps bin

- Easy to use spring motion cleave action
- For cleaving 250µm, 900µm, ribbon and flat fibres
- Durable blade with long lifetime




Item	Description	Price
834951	Precision Cleave Tool V2	£104.64

**MORE FIBRE TOOLS UNDER
TEST & MEASUREMENT**

REQUEST A DEMO

01480 415414 (Head Office)

0141 564 1234 (Glasgow)

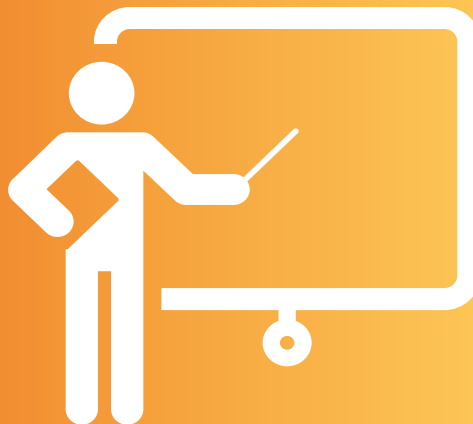

Fibre Optics

Splicers Portable Work Table

Splice in comfort with this portable work tray system. Easy to set-up in any location with optional pole strap accessory available separately

- Raised edges to avoid items spilling off the edge of table
- Recessed cut-out holders, ideal for Isopropyl dispensers
- Rubberised mat for extra grip work surface
- Central position for the fusion splicer to be screwed in place
- 828413 - Tray & Tripod bundle comes with 2 carry bags, the tripod has 3x fully adjustable legs
- 833249 - Pole strap accessory available separately but requires splicers work tray



828413

833249



Item	Description	Price
828413	Splicer Tray & Tripod	£185.00
833249	Pole Buddy Splicer Tray Pole Strap	£48.50

Mobile Splicers Work Table System

Mobile workstation providing a sturdy work platform for splicing in various environments. The Unico mobile tray comes with a waist and shoulder strap and includes a raised position for the cleaver and additional fabric side pockets for storage. Optional accessories available

- Splicer & tray sold separately



LIGHTWEIGHT,
STURDY AND
EASY TO
ASSEMBLE



Item	Description	Price
822068	Universal Splicers Work Tray	£234.60
822113	Work Tray Pole Mount Accessory	£48.31
822114	Work Tray Ladder Mount Accessory	£48.24

Gorilla Stand Tri-Splicer TP-1 Fibre Engineer Workstation & Tripod System

Tri-Splicer is a clever workstation tripod stand system. It will easily straddle most chambers with the node securely positioned on the top, followed by the splicer on the shelf below.

- Kit contains tripod, mini tripod, shelf & carry bag



Item	Mfr Ref	Description	Price
832867	TP-1	Splicer Tray & Tripod System	£89.95

Standard Fibre Optic Cleaning Kit

Fibre optic cleaning kit with everything you need to clean 800+ fibre end faces quickly, reliably and inexpensively

- Kit includes 1x Cleanwipes 600 box
- 1x Cleanwipes 90 Tub
- 25x Outdoor Cleanwipes optical grade wipes
- 30x Cleaning sticks for 2.5mm
- 20x Cleaning sticks for 1.25mm
- 1x Orange case + LED flashlight



Item	Mfr Ref	Description	Price
808915	MCC-FK03	Standard Fibre Optic Cleaning Kit	£71.18

High-Volume Fibre Optic Clean Kit

High-volume fibre cleaning kit containing all the equipment needed to clean thousands of E2000, FC, LC, MU, SC & ST connectors. These kits are optimised for data centres, telco central offices and cable head-ends

- Includes enough supplies for 2,300+ cleanings
- Kit includes 1.25mm & 2.5mm ClickCleaner 750+ pen tools
- 2x Connector cleaning fluid
- 1x Cleanwipes 600 (optical grade)
- 1x Cleanwipes 90 tub
- 25x Outdoor Cleanwipes optical grade wipes
- 30x Cleaning Sticks for 2.5mm
- 20x Cleaning Sticks for 1.25mm
- 1x Orange Case + LED flashlight



Item	Mfr Ref	Description	Price
822215	MCC-FK08	High-Volume Fibre Optic Cleaning Kit	£181.42

CleanClicker Fibre Optic End Face Cleaners

The Stickle's 'click-to-clean' or 'push-to-clean' tools have been designed for all common fibre optic connectors including SC, LC and MPO. They have the most gentle activation on the market and the longest 'throw' of cleaning ribbon delivering perfectly clean connectors with just one activation

- Available in 2.5mm, 1.25mm and MPO style pens
- ClickCleaner 750 products providing 750+ activations
- CleanClicker 400 mini providing 400+ activations
- 2.5mm cleaner engineered for SC, FC, ST, E2000, OptiTap and hardened SC-sized Connectors in standard and angled polish
- 1.25mm cleaner engineered for LC and other small form factor connectors




Item	Mfr Ref	Description	For Use With	Price
822205	MCC-CCM125	1.25mm End Face Cleaner Mini	LC Connectors	£51.31
822059	MCC-CCU125	1.25mm End Face Cleaner	LC Connectors	£57.49
822058	MCC-CCU250	2.5mm End Face Cleaner	SC,FC,ST,E2000 Connectors	£57.49
822212	MCC-CCMPO	MPO End Face Cleaner	All MTP/MPO Connectors	£70.11

CleanClicker Fibre Optic Cassette Cleaners



The Sticklers CleanClicker cassette cleaners are a one time use cassette and micro-woven cleaning ribbon for cleaning connector end faces cleaner available in two options but both cleaning industry common connectors.

- Available in standard end face clean and a specific Male MTP/MPO clean cassette
- Both RC and MT versions contain about 500+ cleanings
- Compact size, easy to use and fits comfortably in the hand

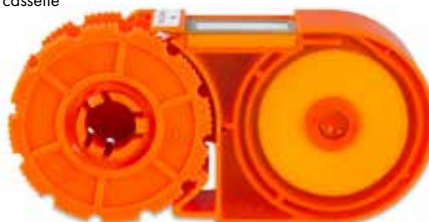

Item	Mfr Ref	Description	For Use With	Price
822210	MCC-CCWRC	CleanClicker Fibre Optic Cassette Cleaner	1.25mm, 2.5mm & Female MTP/MPO	£35.59
822211	MCC-CCWMT	CleanClicker Fibre Optic Cassette Cleaner	Male MTP/MPO Only	£35.59

CleanWipes Benchtop (Lint Free)



Sticklers CleanWipes are high quality, lint free wipes engineered for use on bare fibre before splicing and for cleaning fibre optic jumpers

- Makes wet-dry cleaning of fibre optic connectors easy
- Far stronger and less linting than cellulose wipes



Item	Mfr Ref	Description	UoM	Price
803938	MCC-WFW	CleanWipes	Pk of 90	£6.86

CleanWipes Desk Box (Lint Free)



High quality optical grade wipes for cleaning fibre prior to splicing or for cleaning fibre optic jumpers and connector plugs. They are engineered to be used with the Sticklers fibre optic splice and connector cleaner fluid

- CleanSwipe slots for fast, perfect cleans
- No touch, no rip, no shredding
- High-modulus wipes won't scratch end-faces



Item	Mfr Ref	Description	UoM	Price
803939	MCC-WCS100	CleanWipes Box	400	£20.38

CleanStixx



Sticklers CleanStixx fibre optic cleaning swabs offer consistent, speedy, reliable and inexpensive cleaning

- Blue 2.5mm connector cleaning stick, for cleaning SC, ST, FC, SC/APC, FC/APC, etc.
- Green 1.25mm connector cleaning stick, for cleaning LC, MU and similar
- Cleans the entire end-face, not just the central core
- High-purity cleaning tips-no fabric, foam, glues or particulate
- Precision moulded to exact size and shape, for better cleaning
- Packaged in high-purity, re-closable bags
- Colour coded for easy selection
- High performance and low cost cleaning



Item	Description	Mfr Ref	Colour	UoM	Price
795677	CleanStixx 1.25mm	MCC-S12	Green	Box of 50	£24.09
795678	CleanStixx 2.5mm	MCC-S25	Blue	Box of 50	£24.09

Fibre Optic One Click Cleaners



Cleaning of fibre connector end faces either on patch leads or inside bulkheads with just one-click

- 500+ cleanings per unit



Item	Description	Type	Ferrule Size	Price
400294	One-Click Cleaner	Mini-500	LC, MU, 1.25mm	£48.25
779315	One-Click Cleaner	Mini-500	SC, ST, FC, 2.5mm	£63.01
804737	One-Click Cleaner	Original	MPO	£52.44

PushCleaner Fibre Optic Pen-Style Cleaner



A high quality fibre optic pen-style click-cleaner with patented cleaning action

**GREAT
QUALITY**

- 800 cycles per cleaner
- Gentle sweep yarn rotation (not axial rotation)
- Excellent for APC cleaning
- 1.25mm tip for LC (831351)
- 2.5mm tip for SC, ST & FC (831352)
- Total tool thickness of just 13mm allowing for easy PCB module cleaning



Item	Description	Type	Price
831351	Fibre Optic Cleaner	1.25mm (LC)	£24.61
831352	Fibre Optic Cleaner	2.5mm (FC, SC & ST)	£24.61

Fibre Optic Cleaners (Cletop-S)



Fibre optic connector ferrule end face cleaner

- Second generation cleaner with improved ergonomics and tape maintenance
- Connector ferrules are wiped along slots in exposed cleaning cloth
- Cleaning tape is automatically wound each time the cassette is used ensuring a clean surface for each connector
- Dry cleaning eliminates the need to use IPA or solvents
- Anti-static properties for static sensitive applications
- 400+ wipes per cartridge
- Available in 2.5mm and 1.25mm
- Type-S A: Designed for single 2.5 mm ferrules (FC, SC, SC2, ST, DIN and D4)
- Type-S B: Designed for MU, LC, MT, MPO/MTP without pins, MT-RJ without pins (will also clean 2.5mm ferrules)



Item	Description	Type	Tape	Price
994650	Fibre Cleaner Cassette	Cletop-S Type A	Blue	£101.20
797767	Fibre Cleaner Cassette	Cletop-S Type B	Blue	£83.17
782105	Fibre Cleaner Cassette	Cletop-S Type B	White	£90.85
994700	Fibre Cleaner Replacement Tape	Cletop-S Type A&B	Blue	£21.85
782106	Fibre Cleaner Replacement Tape	Cletop-S Type A&B	White	£21.85

Fibre Optics

Fibre Optic Cleaners (Original Version)

CLETOP

Fibre optic connector ferrule end face cleaner

- Connector ferrules are wiped along slots in exposed cleaning cloth
- Cleaning tape is automatically wound each time the cassette is used ensuring a clean surface for each connector
- Dry cleaning eliminates the need to use IPA or solvents
- Anti-static properties for static sensitive applications
- 300+ wipes per reel
- Type A: Designed for single 2.5mm ferrules (FC, SC, SC2, ST, DIN and D4)



Item	Description	Type	Mfr Ref	Tape	Price
803717	Fibre Cleaner Cassette	Cletop Type A	FCC-02R	Blue	£106.27
994651	Fibre Cleaner Replacement Tape	Cletop Type A&B	FCC-R	Blue	£27.65

Optipop R Series Cartridge Cleaning System

A reel cleaning system designed for cleaning fibre optic connectors

- Available in single slot and dual slot variants to maximise number of cleans depending on connector type
- 400 cleaning positions per tape (800 positions for dual slot)
- Single slot version suitable for SC/MU/FC/LC/MT/MPO
- Dual slot version suitable for SC/MU/LC/FC
- Efficient and easy to use
- Delivers consistently high quality cleaning performance
- Lightweight and safe to use
- Anti-static resin is used
- Replacement reels available as singles or packs of 6



Item	Description	Connectors	Mfr Ref	UoM	Price
719195	Reel Cleaner Single Slot	SC/MU/FC/MT/MPO	R1	Each	£73.17
719196	Reel Cleaner Dual Slot	SC/MU/FC/MT/MPO	R2	Each	£76.75
820450	Replacement Reel	-	RR	Each	£27.53
719197	Replacement Reel	-	RS	Pk of 6	£149.66

Fibre Optic End Face Cleaner

A fibre optic end face cleaner for use with all common connector types. High quality, sturdy construction and easy to use

- Handheld cleaner tool
- 500+ clean cycles
- FC, LC, MTP/MPO, MU, SC & ST connector types
- Replacement reel available



Item	Description	Price
822938	Fibre Optic Cleaner Cassette	£29.70
822939	Fibre Optic Cleaner Replacement Reel	£12.57

Fibre Optic Sharp Bins

SHARPSGUARD®

Sharp bins for the safe disposal of used tissues, wipes, gloves, epoxy residues, syringes and fibre cut-offs

- Available in 2 sizes



Item	Description	Volume	Price
827795	Fibre Sharp Bin	0.5Ltr	£2.41
782073	Fibre Sharp Bin	5Ltr	£3.62

Fibre Optic Sharp Bin

MILLER®

For the safe disposal of optical fibre scraps

- Features a sliding lid
- Can be incinerated when full



Item	Model	Description	Price
999130	46157	Fibre Sharp Bin	£4.37

Fibre Optic Cleaning Buds

Ultima

For cleaning fibre optic connectors and adaptors with IPA (isopropyl alcohol)

- Can be used to clean v-grooves in splicers



Item	Description	UoM	Price
400013	1.25mm Cleaning Buds	Pk of 100	£11.96
996393	2.5mm Cleaning Buds	Pk of 100	£13.16

Fibre Optic Isopropyl Alcohol

Isopropyl alcohol for optical fibre and connector end face cleaning

- Ensures fibres are in optimum condition prior to splicing or termination
- Used with cleaning wipes and buds for removing dirt and contamination from fibre connectors



Item	Description	Volume	Price
995167	Isopropyl Cleaning Solvent	500ml	£6.67
818740	IPA Water Mix	1 Litre	£9.87

Fibre Optic Isopropyl Alcohol Dispenser

Isopropyl alcohol solvent dispensers.

- Child proof cap (996357)



Item	Description	Volume	Price
996357	Isopropyl Lockable Dispenser	113ml	£5.60
832689	IPA Dispenser Bottle	250ml	£4.70

AquaKleen Water-Based Fibre Optic Cleaner

Polywater
Solutions at work

Water-based endface cleaner

- Made with deionised water
- Non-combustible



Item	Description	Volume	Price
828133	AquaKleen Water-Based	950ml	£24.95
828132	AquaKleen Water Dropper	60ml	£11.72

SqueeKleen Loose Tube & Ribbon Gel Cleaners

Polywater
Solutions at work

Developed to clean and fan fibres in two wipes to save time and money

- Removes the need for alcohol use
- Safe to use, reduced odour and minimal vapor concentration
- Suitable for all gel filled cables



Item	Description	Volume	Price
828129	SqueeKleen Cable Cleaning Wipes	300pc	£34.09
828130	SqueeKleen Cable Cleaning Fluid	950ml	£14.50

Fibre Optic Splice & Connector Cleaner

STICKLERS

Non flammable and specifically engineered for fibre optic connectors. Use with CleanStixx cleaning swabs, CleanWipes and one-click fibre optic cleaners

- Completely removes dust, dirt, fingerprints, moisture and dissipates static
- Cleans in five seconds, dries instantly
- Safe on all surfaces
- Volume 3oz (85g)



Item	Description	Mfr Ref	Price
794187	Splice/Connector Cleaner	MCC-POC03M	£12.98

Fibre Optics

Fibre Optic Cleaning Cloth



A dry woven blue cloth which is an alternative to alcohol or solvent wipes, for cleaning optical connectors and lenses

- No need for cleaning solvent
- Washable and re-usable fibre cleaning cloth
- High performance cleaning cloth made from ultra fine microfibre
- 100mm height x 100mm width



Item	Description	Price
999014	Reusable Fibre Cleaning Cloth	£11.95

Kim Wipes Fibre Optic Cleaning Wipes



Non-abrasive lint free tissues

- Can be used dry or with IPA (isopropyl alcohol)
- Tissue Size 21cm x 20cm
- Lint Free 2 Ply



Item	Description	UoM	Price
782100	Fibre Optic Cleaning Wipes	Pk of 100	£4.09

Fibre Optic Impregnated Wipes

Isopropyl alcohol impregnated wipes for general cleaning

- Lint free and non-abrasive



Item	Description	UoM	Price
990234	Impregnated IPA Wipe	Each	£0.45
997147	Impregnated IPA Wipes	Box of 50	£15.69

Impregnated Wipes



d'Gel telecom industry cleaning solution

- High performance cleaner of cables, tools and equipment
- Cleans and removes gels and blocking compounds without sticky residue
- Equally effective with both copper and fibre optic cables



Item	Description	UoM	Price
786919	Impregnated Wipes	Pk Of 24	£20.24

Dust Remover HFC Free



A high pressure liquified gas aerosol that produces a powerful blast for the easy removal of dust

- Free from HFC gases
- Typical uses include electronics and PCBs, keyboards and control consoles, optical devices



Item	Description	Volume	Price
814062	Dust Remover	400ml	£8.05

Aqua-Gel II

Aqua-Gel II cable pulling lubricant

- Polymer-based formula provides maximum tension reduction in high-stress electrical and communications cable-pulling operations
- Compatible with all cable types
- Cleans up easily with soap and water
- Environmentally safe - non-toxic, non-flammable and non-corrosive



Item	Description	Size	Mfr Ref	Price
808375	Lubricant	950ml	Aqua Gel II	£7.07

Techlube PHD Cable Lubricant



Pourable water-based cable lubricant

- Easy to apply, high performance
- Superior friction reduction and strong adhesion to cable/duct wall
- Product does not contain Microspheres



Item	Description	Volume	Price
832016	Techlube PHD Cable	20Ltr	£53.35

Cable Cleaner



d'Gel telecom industry cleaning solution

- High performance cleaner of cables, tools and equipment
- Cleans and removes gels and blocking compounds without sticky residue
- Equally effective with both copper and fibre optic cables



Item	Description	Volume	Price
999007	Cable Cleaner	1Ltr	£24.40
786918	Trigger for 1Ltr Cable Cleaner	-	£5.01

Deionised Water

Deionised water to be used when joining two pieces of bare fibre, often within mechanical splices, to reduce frenal reflections and therefore reducing ower loss

- 1Ltr bottle
- Reduces frenal reflections



Item	Description	Volume	Price
782075	De-Ionised Water	1Ltr	£2.64

White Spirit

Clear bottle of white spirit with childproof safety cap

- Conforms to BS 245



Item	Description	Volume	Price
809633	White Spirit	750ml	£2.75

Syringes

Used to load connectors with epoxy

- Needle and syringe screw together
- Epoxy is delivered to the rear of the ferrule without trapping air bubbles
- Suitable for directly loading from epoxy bi-packs



Item	Description	Price
777166	Syringe Non Sterile	£0.25
777165	Syringe Tip	£0.35

Fibre Laser Warning Labels

For use on all singlemode fibre applications to warn of laser hazards associated with un-capped connectors and adaptors

- Bright yellow background
- Self adhesive backing
- Available in two different sizes



Item	Description	Height	Width	Price
782399	Fibre Warning Label	25mm	50mm	£0.22
782398	Fibre Warning Label	55mm	75mm	£1.37

ORDER ONLINE

www.comtecdirect.co.uk



Fibre Optics

Ultima Splice Protectors

Used to protect fusion spliced joints



- Heat shrink polymer tube with rigid stainless steel bar
- Clear

Item	Description	Diameter	Length	UoM	Price
802666	Splice Protector (Slimline)	1.6mm	40mm	Pk of 12	£3.95
820532	Splice Protector (Slimline)	1.6mm	40mm	Pk of 50	£10.92
997205	Splice Protector	2.4mm	45mm	Pk of 50	£10.12
997211	Splice Protector	2.4mm	61mm	Pk of 50	£10.12

FTTx Splice Protectors

Protect fibres after they have been joined by a fusion splicer.
Designed to be used in the telecoms and FTTx markets



- Heat shrink polymer tube with a 0.8mm steel pin
- 2.2mm OD after recovery
- Can be installed in panels, wall boxes, nodes, enclosures and trays
- Excellent performance and protection



Compatible with leading brands including:



Item	Description	Length	Diameter	Type	Unit	Price
830677	Splice Protector (B200)	45mm	2.2mm	Heat Shrink	Box of 200	£28.55
830679	Splice Protector (B200)	60mm	2.2mm	Heat Shrink	Box of 200	£30.28

Fibre Transport Tubing

Fibre optic transport tubing allows additional protection of fibres in multiple installation applications



- Clear tube for easy visual identification
- Supplied in 1Mtr lengths in kits
- Compatible with manifolds and adaptors

Item	Description	Length	Outside Diameter	Inside Diameter	Unit	Price
822545	Transportation Tube Kit	1Mtr	3mm	1.9mm	Bag of 8	£4.40
828204	Transportation Tube Kit	1Mtr	4mm	2.8mm	Bag of 8	£4.40

Spiral Binding Sleeveing

Standard polyethylene spiral binding for general applications



- Suitable for retro fit
- Cables can be branched out at any point
- Flame retardant polyethylene

Item	Description	Cable Bundle	Colour	Length	Price
783798	Spiral Binding	1.6mm - 8mm	Black	30Mtr	£10.10
783799	Spiral Binding	5mm - 20mm	Black	30Mtr	£12.31
783802	Spiral Binding	5mm - 20mm	Natural	30Mtr	£11.56
783800	Spiral Binding	10mm - 100mm	Black	30Mtr	£31.28
783803	Spiral Binding	10mm - 100mm	Natural	30Mtr	£32.01

Test & Measurement

Test &
Measurement

VIAVI

- 43 OTDRs
- 44 Network Qualification Testers
- 45 – 47 Power Meters, Optical Loss Test Kits and Light Sources
- 48 Visual Fault Locators (VFLs)
- 48 Live Fibre Identifiers
- 49 Video Inspection Probes

FTTX Tool Kit

- 50 FTTX Tool Kit

Fibre Optic Microscope

- 50 Fibre Optic Microscope

Visual Fault Locators (VFLs)

- 50 Visual Fault Locators (VFLs)

Power Meter and Light Source

- 51 Power Meter and Light Source

ETC Group

- 52 Visual Fault Locators (VFLs)
- 52 Power Meter

Live Fibre Identifiers

- 52 - 53 Live Fibre Identifiers

Launch Leads

- 53 Launch Leads

Bare Fibre Adaptors

- 54 Bare Fibre Adaptors

Voice Test Equipment

- 55 Tempo Test Telephones
- 56 Voice Test Cords
- 56- 57 Tempo Tone Probes & Generators
- 57 Telephone Line Testers

Wire Mapping & Fault Finding

- 58 Wire Mapping & Fault Finding

Electrical Testing

- 59 - 60 Electrical Testing

TV Signal Meters

- 61 TV Signal Meters

IoT Testers

- 62 IoT Testers

Honeywell Gas Detection

- 63 - 64 Honeywell Gas Detection





VIAYI

Be Smarter with your Fibre Testing

Fast, easy to use tools you can rely
on to get the job done right first time.

viavisolutions.com/smartertesting



SCAN HERE
to request your own
Fiber Ninja Plush Toy



SmartOTDR Kit

A range of compact, rugged, lightweight OTDR pre-configured with options to suit different test requirements in a single, handheld device. Simplified trace analysis with Smart Link Mapper (SLM) and automated testing with objective pass/fail results



- 5" high-visibility touchscreen
- 3-year warranty
- Long battery life (all day working)
- Smart Access Anywhere (SAA) for remote control & field tech support

Item	Description	Model	Wavelengths	Price
833691	SmartOTDR	BASE Maintenance Kit	F1650nm	POA
832967	SmartOTDR	PRO Installation Kit	1310/1550nm	POA
832968	SmartOTDR	PRO Install & Maint. Kit	1310/1550/F1650nm	POA
833690	SmartOTDR	Premium Install & Maint Kit	1310/1440/F1650nm	POA

MTS-4000 V2 OTDRs

A compact platform with field-replaceable modules covering multiple optical test functions (OTDRs, optical power & loss testing, Optical Spectrum Analyser (OSA), etc.) that enable complete optical network qualification. VIAVI StrataSync enabled for optimised workflow and operation



- 9" high-visibility colour touchscreen
- Ethernet, Wi-Fi and bluetooth connectivity
- Smart Access Anywhere (SAA) for remote control and field technical support
- StrataSync enables for cloud-based asset, configuration, test data and workflow management
- MTS-4000 modular platform supports up to two 4100 series OTDR modules
- 4100 series modules easy to fit and change

Item	Description	Wavelengths	Price
833799	MTS-4000 OTDR	850/1300/1310/1550nm	POA
832969	MTS-4000 OTDR	1310/1550/F1650nm	POA

FiberComplete OTDR

The most complete fibre testing solution for quick and easy use in characterising point-to-point or point-to-multipoint passive-optical networks (PON). Fully automates all the fundamental fibre qualification tests from one optical port. Available on the MTS-2000 or MTS-4000 modular platforms the testers must be used in pairs



- 3.5 second measurement time for bi-directional IL/ORL and fibre length at two wavelengths
- Full setup and data exchange between near end and far end units for fewer mistakes and retests
- Smart Link Mapper (SLM) icon-based map view of the fibre link
- Real-time continuity check and automatic product pairing
- Manage fibre and cable results
- Step-by-step wizard lets you reference initial IL/ORL tests
- Smart Access Anywhere (SAA) for remote control and field tech support
- StrataSync enabled for centralised cloud based asset, configuration, test data and workflow management

Item	Description	Model	Price
833693	MTS-4000 OTDR	FiberComplete Read	POA

Test Equipment

NSC-100 Network & Service Companion

Validate network and customer equipment performance on a single device and share results with customers and service providers. Simple testing of PON, Ethernet and Wi-Fi, preventing/resolving customer complaint. Check Wi-Fi coverage and performance with simple room-by-room analysis

- GPON, XGSPON, Ethernet and WiFi tests, including throughput test up to 2 Gbps
- Ethernet 1G, 2.5G, 5G and 10G interfaces
- 3x3 WiFi antenna with 2.4 and 5 GHz
- PON data analysis (PON-ID)
- PON power levels
- Job Manager



Item	Description	Application	Model	Price
832964	NSC-100	GPON, XGSPON	GPON-XGSPON-BASE	POA
834460	NSC-100	Ethernet, WiFi, Speedtest	NSC100-HOME-PRO	POA
832966	NSC-100	GPON, Ethernet, WiFi, Speedtest	GPON-PRO	POA
832965	NSC-100	XGSPON, Ethernet, WiFi, Speedtest	XGSPON-PRO	POA

OneExpert ONX-580 DSL Tester

Helps technicians working in Gigabit broadband deployments find and fix faults fast. The multi-touch, user-friendly interface and OneCheck automated tests ease complex tasks with clear pass/fail results. The modular design means that future upgrades can be quickly and easily achieved. All models support FTTH and WiFi testing

- Large screen simplifies results analysis
- Multi-touch user interface for faster testing
- StrataSync cloud-based asset and data management
- OneExpert app uses mobile devices for remote control, data enhancements and connectivity



Item	Description	Model	Price
835284	OneExpert ONX-580P	G.Fast/V35b	POA

Optimeter

Delivers full certification of the last mile fibre installation and turn-up with on-the-go troubleshooting to improve first time install success rate while reducing unnecessary handovers, drop fibre replacements and repeat truck rolls. The Optimeter combines all the key features and capabilities to enable installers to certify the last mile drop is good, identify and locate any issues and determine if it is their responsibility to fix while still on site or hand off to the correct repair team

- Simple user interface requires no settings and no training
- One-button press, one-screen result tests, all run under 1 minute
- Auto saved results with on-board report generation (.pdf) tied to work order
- USB connectivity supporting P5000i inspection probe
- Wi-Fi connectivity for connection to VIAVI Mobile Tech App & FiberChek inspection probe
- 20 hours of operation



Item	Description	Wavelengths	Price
832957	Optimeter	1650nm (Filtered)	POA

SmartPocket OLP-37XV2 Selective PON Power Meter

Pocket-sized power meter to measure power levels and loss in fibre and FTtx networks. Designed for outdoor use the OLP-37XV2 can store up to 1,000 test results for download to a PC or upload to the cloud

- Single test port connection with SC adapter for dual wavelength measurement
- Selective power level measurements for both G/E-PON and XGS-PON/10G-EPON services
- Storage for > 1000 test results
- Bluetooth low energy connectivity to the VIAVI Mobile Tech App
- 3-year warranty and recalibration period



Item	Description	Wavelengths	Price
832972	SmartPocket Selective PON Power Meter	1490/1577nm	POA

SmartPocket Optical Loss Test Kits

Optical test kits comprising light source and power meter for installation and maintenance of fibre optic networks

- Low power consumption for extended continuous use
- Fast Auto-wavelength, Multi-wavelength mode
- No setup - 'OptiChek' measurement mode
- High-Visibility backlit graphical display with context-sensitive softkey
- Automatic upload of results via VIAVI Mobile Tech application
- Designed for outdoor use
- Instant On - no boot time
- Clear pass/fail information



Item	Description	Wavelengths	Price
833233	SmartPocket V2 Optical Test Kit	1310/1550nm	POA

SmartPocket V2 Broadband Power Meters

Compact and rugged optical power meters for insertion loss and continuity testing of optical fibres

- Designed for outdoor use
- Low power consumption
- Instant on
- Optical tracing by detecting light source tones
- Storing and reporting of more than 1000 test results
- Bluetooth connectivity to the VIAVI Mobile Tech app
- 3-year calibration period



Item	Description	Wavelengths	Price
832818	SmartPocket V2 Power Meter	850/980/1310/1490/1550/1557/1625/1650nm	POA

Test Equipment

SmartPocket V2 Optical Light Sources

Compact and rugged optical light sources for quick and easy field measurements of optical insertion loss

- Designed for outdoor use
- 50 hours run time
- Instant on
- Fibre tracing using light source tones
- Measure optical power levels and link insertion loss



Item	Description	Wavelengths	Price
832815	SmartPocket V2 Light Source	1310/1550nm	POA

SmartClass MPOLx Optical Loss Test Set

The only tester that can perform full Tier 1 certification of MPO connectivity. Tests can be controlled and results viewed on both the light source and power meter and full certification reports can be generated. The integral patch cord microscope (PCM) enables 'Inspect Before You Connect (IBYC)' of MPO patch leads without the need for a separate inspection probe

- Measures cable length and optical loss
- Check polarity
- Test 12 fibres in less than 6 seconds
- Encircled flux compliant
- 3.5" colour touch screen
- Compatible with P5000i Video Inspection Probe
- Integrates with FiberChek Pro software



Item	Description	Wavelengths	Price
834908	SmartClass MPOLx Optical Loss Test Set	850/1300/1310/1550nm	POA

SmartClass OLP-85/-85P Optical Power Meters

Optical power meters with an 800-1700nm wavelength measurement range (1 nm incremental setting) and high accuracy over an ultra-wide 100dB dynamic range

- Measurement of optical power (absolute and relative)
- Measurement of optical insertion loss together with a VIAVI optical light source
- Inspection of optical connectors
- In-service loss test option
- 2.5 mm and optional 1.25 mm universal push-pull (UPP) adapter system
- 3.5" colour touch screen with integrated stylus
- Individual threshold settings for power and loss pass/fail analysis
- Onboard fiber inspection and test results storage with time stamp (-85P)
- Data transfer and remote control via USB or Ethernet interface
- Auto-lambda and multi-lambda test functions in combination with VIAVI light sources



Item	Description	Wavelengths	Price
833371	OLP-85P Optical Power Meter	850/980/1310/1490/1550/1625nm	POA

SmartClass OLS-85 Optical Light Sources

Rugged, weather-proof optical light sources with up to 4 wavelengths. End-face inspection capable with the optional P5000i microscope



- 3.5" colour touch screen with integrated stylus
- Adjustable output level
- Auto-lambda and multi-lambda test - functions communicate with Viavi power meters
- In-service loss test option

Item	Description	Wavelengths	Price
833372	SmartClass OLS-85 Light Source	1310/1550nm	POA

Test & Measurement

SmartClass OTS-55 Optical Talk Set

Enables engineers to communicate over a single 'dark' fibre. It provides clear, digital voice transmission with hands-free operation using a headset or 'speakerphone' mode



- Operates at 1550nm
- >45db dynamic range
- Hands-free operation
- 60 hours operating time

Item	Description	Wavelengths	Price
833560	SmartPocket Optical Talk Set (Pair)	1550nm	POA

**REQUEST
A DEMO**

01480 415414 (Head Office)
0141 564 1234 (Glasgow)



Test Equipment

Visual Fault Locator

The ideal tool for quickly and easily locating damage or breaks in fibre optic cables. VIAMI offer VFLs in two different formats, the compact FFL-050 and the ruggedised, pen-style FFL-100

- 650nm visible wavelength
- 1mW laser
- Continuous or flash illumination
- Universal connector interface
- Include a soft carry case with belt loop
- Batteries included



VIAMI

Item	Description	Range	Price
832958	Visual Fault Locator	7km	POA

FI-60 Live Fibre Identifier

A Live Fibre Identifier (LFI) and an Optical Power Meter (OPM) in a single, convenient tool. The LFI detects optical signals without having to disconnect fibres or disrupt network traffic. The SafeChek system ensures safe and repeatable engagement with most fibre types. It converts quickly and easily into an Optical Power Meter by simply removing the LFI head attachment. Up to 100 test results can be saved for downloading to PC via USB

- LFI head accepts fibre jackets from 250µ to 3mm diameter
- Supplied with 1.25 and 2.5mm universal power meter adaptors
- Measure both absolute (dBm) and relative (dB) power
- Store and recall up to 100 OPM readings
- >70 hours battery life



VIAMI

Item	Description	Range	Wavelengths	Price
832960	Live Fibre Identifier	+10 to -65dBm	850-1625nm	POA



ASK OUR EXPERT

SPEAK TO OUR VIAMI SPECIALIST ABOUT YOUR REQUIREMENTS OR TO ARRANGE A DEMONSTRATION

01480 415414 (Head Office)

0141 564 1234 (Glasgow)

FiberChek Sidewinder Video Inspection Probe

FiberChek Sidewinder provides automated inspection and analysis of multi-fibre connectors such as MPO/MTP. With auto-centre, auto-focus and auto-scroll the Sidewinder needs no specialist training

- Pass/Fail to IEC-61300-3-35 or customer-specific requirements
- Full colour touch screen
- Store or export results
- Compatible with FBPT series single fibre inspection tips
- All day battery life



Item	Description	Wavelengths	Price
834909	Video Inspection Probe	FiberChek Sidewinder	POA

FiberChek Video Inspection Probe

The FiberChek probe has built-in image viewing, auto-focus, pass/fail analysis and result storage and recall. It can be used in standalone mode or can be connected to other devices via Wi-Fi and USB

- Auto-center & Auto-focus
- Integrated touch screen with live fibre viewing
- Built-in fibre end-face analysis
- User-selectable acceptance profiles
- Store results on device or export
- Connect via Wi-Fi and USB
- FIT-FC-KIT2 Included Tips: LC & SC Bulkhead, Universal 1.25mm & 2.5mm Patch Lead
- FIT-FC-KIT3 Included Tips: LC, SC & SC/APC Bulkhead, Universal 1.25mm, 2.5mm & 2.5mm APC Patch Lead
- FIT-CATV-KIT2 included Tips: LC & LC/APC, SC & SC/APC Bulkhead, Universal 1.25mm UPC & APC, 2.5mm UPC & APC Patch Lead



Item	Description	Model	Tips	Price
833050	Video Inspection Probe	FiberChek	4	POA
832963	Video Inspection Probe	FiberChek	6	POA
832971	Video Inspection Probe	FiberChek	8	POA

P5000i Video Inspection Probe

When connected to a suitable device the P5000i automatically inspects and certifies the end faces of fibre connectors according to industry standards and specifications. It provides instant pass/fail results at the push of a button, eliminating subjective and time-consuming guesswork

- Connects via USB with multiple devices including Viavi tools, laptops/PCs, and Android mobile devices
- User-selectable acceptance profiles allow certification to any acceptance criteria
- Includes FiberChekPROT software for analysis and reporting with laptops/PCs
- Automatic image centring ensures the fibre always appears in the centre of the screen
- Detailed report generation to certify and document results
- Dual magnification (200X and 400X) functionality provides high-level and detailed inspection and analysis
- Magnification toggle button allows easy switching in both live and analysis views
- Repeatable pass/fail analysis eliminates subjective guesswork from the measurement process
- Accepts FBPT series tips for comprehensive support for all connector types used in today's network



Item	Description	Model	Price
832973	Video Inspection Probe	P5000i	POA

Test Equipment

Portable FTTx Tool Kit

Small compact FTTx tool kit ideal for every fibre engineer who's working on FTTx, LAN, PON and optical CATV networks

- 9 piece tool kit from preparation, inspect and test
- Includes visual light pen for fault location
- Tools for jacket and fibre stripping
- Precision cleave tool with sharps bin
- Optical power meter with SC and FC adaptors
- Fixed length cleave guide
- IPA bottle (empty) and wipes
- Supplied in a soft carry case
- NOTE: VFL pen and power meter require AA batteries. See pg 134



Item	Description	Price
824610	Portable FTTx Tool Kit	£171.35

Fibre Optic Microscope

Precision handheld fibre microscopes for connector ferrule end face inspection

- Lightweight, robust construction offering up to x400 magnification
- Includes 1.25mm, 2.5mm adaptors, a soft carry case and 3 x AAA batteries
- Momentary On/Off switch and fine focus controls
- Built-in IR filter providing over 35dBm of attenuation over 1310nm to 1550nm and 20.5dBm over 850nm
- NEVER TO BE USED ON ACTIVE EMITTING FIBRE!



Item	Description	Price
803325	Fibre Optic Microscope	£102.35

Visual Fault Locator

Specially designed VFL for field personnel who need an efficient and economical tool for fibre tracing, fibre routing and continuity checking in optical networks

- 2.5mm universal connector, with adaptor for 1.25mm connectors
- Operates either in continuous wave (CW) or Pulsed mode with constant output power
- Long battery life (up to 60 hours)
- Drop-resistant and dust-proof design of laser head
- Requires 2x AA batteries. See pg 134



827267



822887

Item	Description	Output Power	Price
827267	Visual Fault Locator	1mW	£23.89
822887	Visual Fault Locator	20mW	£25.71

Optical Power Meter

A low cost power meter used to measure the received optical power from fibre optic links

- Supplied with FC and SC adaptors
- Calibrated for 850/980/1300/1310/1490/1550/1625nm wavelengths
- Accurate to +/- 0.2dB
- Suitable for PC or APC connectors
- Requires 3x AA batteries



Item	Description	Price
828278	Optical Power Meter	£61.48

Optical Light Source

A low cost singlemode light source

- 1310/1550nm wavelengths
- FC and LC connectors
- Requires 3 x AA batteries
- Supplied in soft carry case



Item	Description	Price
828354	Optical Light Source	£124.32

HIRE SERVICE AVAILABLE NOW

TO ENQUIRE ABOUT PRICING PLEASE CONTACT THE TEAM NOW ON

☎ 01480 415 414 ✉ sales@comtecdirect.co.uk



Test Equipment

Test & Measurement

Visual Fault Locator



The optical fault locator makes it possible to test the continuity of the optical fiber and to locate the faults thanks to the laser emission in the visible at 650nm, with a power of 3mW. It is the ideal portable tool to support you in the deployment and maintenance of FTtX networks, thanks to its ergonomic design, its compactness and its ease of operation

- Laser class: CLASS 3R
- Output power: $\geq 3\text{mW}$
- Continuous use time: 13 hours
- Usage time 2Hz mode: 23 hours
- Laser Type: LD
- Connector: Universal
- Wavelength: 650nm
- Batteries: 2 x AAA
- Operating temperature: 0 to + 40C and <90% RH
- Dimension (L x W x H): 120 x 33 x 30mm
- Weight: 67.8g



Item	Description	Price
832873	Visual Fault Locator	£70.00

Optical Power Meter



Ergonomic and easy to use optical power meter measuring 6 wavelengths. Supplied with FC and Universal adapter (FC / SC / ST). Results in W or dBm and dB (for relative measurement)

- Wavelengths [nm] : 850/1300/1310/1490/1550/1625
- Detection type : InGaAs
- Accuracy : $\pm 0.01\text{ dBm}$
- Power window : 850/1300: $+10 \sim -50\text{dBm}$;
1310/1490/1550/1625: $+10 \sim -60\text{dBm}$
- Unit : dB, dBm, μW
- Adapter : SC and universal SC, ST, FC
- Data logging : No
- Dimensions [mm] : 77.8 x 112.9 x 22.1
- Auto off [min] : 10
- Power supply : 2 AAA batteries
- Autonomy [hours] : 100
- Display : 16 by 2 LCD module
- Operating temperature: $-20 \sim 75\text{ }^\circ\text{C}$
- Storage temperature : $-40 \sim 85\text{ }^\circ\text{C}$



Item	Description	Range	Price
832891	Optical Power Meter	-60 to +10dBm	£207.00

Live Fibre Identifier

Quickly and easily find live fibres and determine the direction of data traffic

- Displays direction of signal
- Tone detection at 270Hz, 1kHz and 2kHz
- Suitable for 250 μm , 900 μm , 2mm and 3mm fibres with no need to change adaptor
- Supplied with protective shade for use in bright ambient light conditions
- Requires 2x AA batteries
- Supplied with protective pouch



Item	Description	Range	Heads Inc.	Price
828753	Live Fibre Identifier	+10 to -50dBm	0.25mm, 0.9mm, 2.0mm, 3.0mm	£179.05

Live Fibre Identifier

The FI-100 fibre identifier allows you to quickly determine the approximate core power and signal direction in a fibre optic cable without disconnecting the fibre

- Low induced insertion loss
- Able to sense the presence of light in bend insensitive fibre
- Supports all common fibre types, including ribbon fibre
- Tone detect
- Determines direction of light travel
- Rugged and easy to use
- Requires 2x AAA batteries (included)



TEMPO
COMMUNICATIONS

Item	Description	Range	Heads Inc.	Price
802610	Optical P Live Fibre	-60 to +10 to -50dBm	0.25mm, 0.9mm, 2.0mm, 3.0mm	£429.81

Singlemode Fibre Optic Launch Leads

Singlemode fibre optic launch leads for use with OTDRs

- Provide accurate measurements and controlled launch conditions
- Hardened Lens Contact (HLC) termination procedure for scratch resistant end faces
- Manufactured using G652.D singlemode fibre
- Armoured tails for added protection, reducing accidental damage
- Compact spool design - lightweight and durable
- Supplied in padded storage bag to reduce contamination whilst not in use
- Available in 130Mtr, 500Mtr and 1000Mtr lengths
- Colour Yellow



Ultima

	Length 130Mtr	Length 500Mtr	Length 1000Mtr
	£156.57	£215.64	£289.42
FC-SC	823516	823517	823518
LC-SC	823531	823532	823533
LC-SC/APC	823845	823846	823847
LC/APC-LC/APC	-	-	823545
SC-SC	823521	823522	823523
SC-SC/APC	823542	823543	823544

Test Equipment

Bare Fibre Adaptors

Bare fibre adaptors for connecting fibres to power meters, OTDRs and a variety of other instruments enabling in-situ functional testing without having to attach a permanent connector

- Easy to use
- Suitable for singlemode 250µm and 900µm fibres
- Lifetime tested: 1,000 insertions



Item	Description	Mode	Price
814013	Bare Fibre Adaptor FC/UPC	SM	£20.12
823680	Bare Fibre Adaptor LC/UPC	SM	£20.13
814186	Bare Fibre Adaptor SC/UPC	SM	£17.50

SEE OUR **BRANDED FIBRE PRODUCTS ONLINE**

COMMScope®

Draka

HellermannTyton

molex

Nexans

Prysmian

A Brand of Prysmian Group



Bare Fibre Adaptors

Bare fibre adaptors designed to quickly connect to un-terminated (bare fibre) for testing, servicing or communication requirements. Simply connect the patch cable to the test equipment and insert the bare fibre into the end of the bare fibre adaptor. Connections are suitable for many testing applications with results similar to a standard terminated piece of fibre

- Accepts cleaved and non-cleaved fibre
- Quickly test fibre without terminating
- Internal replaceable cartridge filled with optical coupling compound
- Low insertion loss and reflectance
- No dipping, messy applicators or external reservoirs to fill
- Reusable



Item	Description	Mode	Mfr Ref	UoM	Price
773483	Bare Fibre Adaptor FC	SM	DVT-S1	Each	£449.71
795838	Bare Fibre Adaptor SC	SM	DVT-S3	Each	£449.71
773484	Bare Fibre Adaptor Replacement Cartridges	-	-	Pk of 3	£68.28

Model	DSP	340	350	361	TM-500	TM-700
Two-way Speakerphone				•		
Loudspeaker Listening		•	•	•		
Phone to Phone intercom						•
Hands free through optional headset	•				•	•
Built-in Ringer with Adjustable Ring Tones		•	•	•		
ADSL Compatible		•	•	•	•	•
Digital Safe Line Monitor	•	•	•	•	•	•
Digital Service Protection	•	•	•	•	•	•
Line Polarity Test in any Mode			•	•	•	
Line voltage, current & frequency						•
Audible and Visual Mode Indicators		•	•	•		•
DTMF Capture						•
Tone/Pulse	•	•	•	•	•	•
Pause		•	•	•	•	•
Microphone Mute	•	•	•	•	•	•
Speaker Volume Control	•	•	•	•	•	•
Quick change cord	•	•	•	•	•	•
Low Battery	•	•	•	•	No Battery required	•
Luminous Keypad					•	•
Last Number Redial	1	1	1	1	1	10
Stored No Capacity	1	10	10	10	10	10
Stored No Length	32	32	32	32	32	32
IP Rating	30	67	67	67	30	30
3 Year Warranty		•	•	•		
Shrouds and Crocodile Clips	•	•	•	•		
BT Plug			•		•	•

Compact DSP Test Telephone



Compact test set designed to operate safely where telephone wiring may be carrying digital traffic, voltage feed or hazardous voltages

- Rugged, drop proof design
- Over current protection
- Test leads are fitted with crocodile clips



Item	Description	Price
992879	DSP Test Telephone	£105.60

DigAlert Test Telephones



Field telephones designed to prevent network intervention

- Voltage service protection
- Nautilus 350 & 361 models have added benefit of digital signal detection override
- Nautilus 361 offers the latest in data protection, allowing technicians to test the POTS service on a live ADSL line without fear of bringing down the data service



Item	Mfr Ref	Price
779919	Alert 340	£154.07
772823	DigAlert 350 International	£212.84
779920	DigAlert 361	£243.96
789897	Braided Retractable Cord Set	£15.00

TM-500 Tele-Mate Test Telephone



TM-500 Tele-Mate test telephone troubleshoots analogue telecommunication circuits

- DSL compatibility
- Tone or pulse dialling
- BT plug/RJ11 socket
- Luminescent keypad
- Storage of up to 10 telephone numbers
- LNR (Last Number Redial)
- Impact resistant



Item	Description	Price
788521	TM-500 Test Telephone BT Plug	£119.69

TM-700 Tele-Mate Test Telephone



TM-700 Tele-Mate test telephone with LCD enhances technician productivity by clearly showing data for polarity, voltage, current and ringing frequencies

- DSL compatibility
- Tone or pulse dialling
- BT plug/RJ11 socket
- Luminescent keypad
- Storage of up to 10 telephone numbers
- LNR (Last Number Redial)
- Smart intercom & caller ID
- 6 Month battery life



Item	Description	Price
788525	TM-700 Test Telephone BT Plug	£180.32

Test Equipment

Smart Switch Universal Test Adaptor

Universal Test Adapter is a compact testing device that enables technicians to test all connectors within the access network using one single device. It allows switching between monitor, customer and exchange easily

- Connector types include:
Standard Krone LSA PLUS/3M SID moule/ECM1B/Discrete Crimp / LSA-TL/PSTN



Item	Description	Price
817284	Smart Switch Universal Test Adaptor Kit	£90.08

Cordsets B, D, E & F

Cordsets with a BT 631A jack on one end and a range of plugs and clips on the other

- 6/10E - 631A to 3x Croc Clip
- 6/10D - 631A to 4 Pole Krone Plug & Croc Clip
- 6/10B - 631A to 2 Pole Krone Plug
- F - 631A to 2 Pole Krone Low Profile Plug



Item	Description	Price
990162	B 6/10E	£9.86
990161	Cordset D 6/10D	£9.33
990170	Cordset E 6/10B	£5.46
990171	Cordset F	£13.61

237 Connection & Test Cords & Plug

COMMSCOPE

Test cords and plugs for interconnecting or testing of circuits on 237 style modules

- Test cord have a plug on one end only with the other end for connection to user's test equipment
- Connections - Banana Sockets to Krone Plug



Item	Man. Code	Description	Length	Price
990246	66242040-09	Test Cord	200mm	£13.65

AdaptaJacks

TEMPO COMMUNICATIONS

AdaptaJacks enable test equipment with banana test leads to connect to different types of connector

- Available with BT plug, Krone plug or RJ11



Item	Description	Plug	Price
786628	AdaptaJack	RJ11 Plug	£8.26
786629	AdaptaJack	Krone 2 Pole	£22.73
786630	AdaptaJack	BT Plug	£8.26

Line Jack Test Adaptors

TEMPO COMMUNICATIONS

Jack adaptors to access wiring via a line jack unit

- Clamp on crocodile clips to connect to BT (631A) or RJ45 socket



Item	Plug	Price
822325	8 Wire - RJ45 Plug	£20.27
827127	6 Wire - BT Plug (631A)	£12.95

Test Adaptor 51A

Test adaptor for use on block terminals 18/19A

- Enables connection of line test equipment




Item	Description	Price
991043	Test Adaptor 51A	£19.58

Tone & Probe Kit

Tone generator and probe for tracing and identifying cables

- Volume control for increased sensitivity and adjustable to suit work environment
- 3-position toggle switch controls the modes of operation
- Three coloured LED displays circuit polarity, continuity and testing voltage
- Headset jack
- Tone selector switch for single solid tone or dual alternating tone



Item	Type	Price
786292	Tone Generator and Probe	£35.94

SIGN UP

TO RECEIVE PRODUCT NEWS & OFFERS VIA EMAIL

www.comtecdirect.co.uk



CP3/701K-G Tone Kits, Generators & Probes

Professional tone and probe tracing equipment available in kits or separately

- CP3 (hard case) & 701K-G (soft case) kits comprise of a 77HP-G high power tone generator, a 200EP-G tone tracing probe, an RJ11/45 coupler, alternate flat/spade plastic, round metallic probe tips, headset jack, short circuit beeper and external warble select
- Tone generator & tone probe also available separately



Item	Description	Mfr Ref	Price
990794	Tone Probe	200EP-G	£59.41
990795	Tone Generator	77HP-G	£39.25
991051	Tone/Probe Kit Soft Case	701K-G	£96.11
990808	Tone/Probe Kit Hard Case	CP3	£119.08

Tone & Tracer 500XP/600J

A selection of audio amplifier, tone and probe kit for organisations operating large copper networks

- BT approved
- Tone generator produces a pure Sine waveform
- Waterproof design
- Additional/replacement lead sets can be purchased separately
- Tone generator and tone probe also available separately
- Battery indicator and warning with auto shut-off



Item	Description	Mfr Ref	Price
792192	Tone Probe	500XP	£102.51
991771	Tone Generator	600J	£90.22
821352	Tone/Probe Kit Soft Case	500XP/600J	£195.14
790553	Lead Set for Greenlee Tone & Tracer	500XP/600J	£13.35



ORDER ONLINE

www.comtecdirect.co.uk

SA9083 Line Tester

Battery powered, multi-range, analogue, portable line tester

- Primarily intended for use by faultsmen for maintenance testing of telecommunication lines and equipment
- Supplied complete with a robust carrying case and set of test leads and probes (Cords Test 1/1500A, Clip Test 38A, Spike Test 10A)
- Spare/replacement test lead sets (18C) can also be purchased separately



Item	Description	Price
100012	SA9083 Line Tester	£197.50
400002	Replacement Lead	£19.20

Test Equipment

Graphical TDR Cable Fault Locator



Graphical time domain reflectometer and tone, also known as a Graphical TDR, designed to detect and locate faults on copper communication cables up to 3.5km

- Advanced signal processing techniques enable the TX TDR's to find opens, short circuits, splices, taps, water ingress and other impedance mismatches
- A built in oscillator provides a tone for pair tracing and identification
- Supplied complete with test leads and a protective tool-belt holster



Item	Description	Price
782039	Graphical Fault Locator TX2002	£369.92

2 in 1 Cable Tester

Handheld wiremap and continuity tester with RJ11 and RJ45 connections

- Checks open and short pairs, straight through or crossover wiring types
- Shield continuity test
- LED status lights
- Master and Remote
- Requires 1 x 9V Battery (not included) See pg 134



Item	Description	Price
786296	2 in 1 Network Cable Tester	£12.02

4 in 1 Cable Tester

Handheld tester for RJ45, RJ11, USB and BNC cables

- LED indication for short/open circuit, crossover and no connection
- Single button test
- Low battery indication
- Supplied with a holster
- Requires 1 x 9V Battery (not included) See pg 134



Item	Description	Price
786293	4 in 1 Cable Tester	£22.75

Twisted Pair & Coax Cable Tester

Verify LAN, telephone, coax, USB and other cables

- Checks open and short pairs, straight through or crossover wiring types
- Master and 8 Remote Identifiers (coax and RJ45 connections)
- Shield continuity test
- Measures length of cable and distance to fault
- Integral tone generator - supplied with tone probe
- Backlit LCD screen
- RJ45, RJ11 and RJ11 to Croc Clip leads
- Requires 2 x 9V Battery (not included) See pg 134



Item	Description	Mfr Ref	Price
810493	Cable Tester RJ45 and Coax	NF-388	£80.32

QuinTest Cable Tester



Compact cable tester. Tests and verifies short circuits, open circuits, pair reversals and miss-wires

- For use on 2, 3 and 4 pair voice and data cabling
- Sequencing LED display indicates cable faults at both ends
- Auto power off and low battery indication
- Additional LED indicators show screen continuity when testing STP cable
- Requires 1 x 9V battery.



Item	Description	Price
773182	QuinTest Wiremap Tester	£63.07

SLT3S Tester



Often referred to as a MOD-TAP tester, the Molex SLT3S tester is used to verify the wiring of 1, 2, 3 and 4 pair shielded or unshielded cabling. Master and remote units clip together for compact storage

- Separate ports for testing 568A, 568B and USOC wiring schemes
- Detects shorts, opens, reversals and mis-wires
- Continuously monitors status through use of LEDs
- Tests shield continuity on shielded cabling
- Powered by 9V battery (supplied)



Item	Man. Code	Connectors	Price
776672	33A-100-10	RJ45	£67.61

Digital Multimeter

Professional multimeter offering 30 testing ranges and 8 functions

- Large 3.5 digit LCD display
- Automatic polarity indicator
- Continuity test with buzzer
- Capacitance, temperature and frequency ranges
- DC current measurement
- Resistance measurement (20 Ohm to 2 MOhm)
- Diode, continuity and transistor test
- Requires a 9V PP3 battery (not included) See pg 134
- Supplied with carrying case, shrouded test leads, K type temperature probe, shock-proof rubber holster and battery



Item	Description	Price
786051	Digital Multimeter 500V AC/DC	£8.76

UK 3 Pin Socket Wiring Tester

Mains socket tester to quickly and easily tell if your sockets are safe to use

- Clear LED indication of wiring status
- Audible indication of wiring condition
- Modern ergonomic design with soft finger grip
- Wiring conditions reported:
Correct, L/N reversed, missing N, missing E, L/E reversed



Item	Description	Price
797124	Mains Socket Tester 230V	£10.75

'Check Plug' Socket Tester



Check plug socket testers are a quick and easy way to tell if your sockets are safe to use

- Quick & easy testing of socket wiring
- Detects 28 fault conditions
- Three bright LEDs with clear & simple fault codes on the plug
- Tough sculpted design for easy removal



Item	Description	Socket Type	Price
790781	Socket Tester 230V	UK 3 Pin	£14.62

Kewstick Voltage Detectors



A Kewtech voltage detector instantly alerts the user to the presence of voltage without the need to make contact with a system. Proving Unit for instant testing of non-contact voltage testers before and after use.

- Detects the presence of AC voltage from 90 to 600V without the need to make direct contact
- Two colour LEDs - green shows correct operation and red for voltage detection



Item	Description	Price
824050	Non-contact Voltage Detector	£23.97
824049	Proving Unit	£76.10

Voltstick Voltage Indicators

Safely checks the presence of an AC Voltage without making any disconnections in cables, wall sockets, fuses, circuit breakers or junction boxes

- Red indicator in the Voltstick will illuminate on detection of AC Voltage
- Simply apply the tip close to any connection point
- Locates breaks in cables
- Detects blown fuses inside plugs or fuse holders
- Distinguishes between live and neutral wires in single and three-phase supplies
- Yellow - Voltage detection with red LED indicator and pointed tip
- Green - Voltage detection with red LED indicator, pointed tip and buzzer
- Includes 2x AAA alkaline batteries



Item	Description	Type	Voltage	Colour	Price
784564	Voltstick	Voltage Tester	230V AC	Yellow	£14.30
792057	Voltstick	Voltage Tester + Buzzer	230V AC	Green	£18.08

Test Equipment

Elma 932 Clamp Meter AC



Elma 932 clamp meter is a compact unit ideal for keeping in the pocket and for measurement in tight spaces

- Measures voltage, current, resistance and continuity
- 400A AC current measurement
- 2000 counts backlit LCD
- Auto power off and low battery display
- Data and max hold mode
- Non-contact AC voltage detecting function
- Supplied with carry case, test leads and battery



Item	Description	Model	Voltage	Resistance	Price
792062	Clamp Meter	Elma 932	0-600V AC/DC	0-20MΩ	£49.87

Sound Level Meter



A Class 2 sound level meter for on-site measurements in accordance with the noise at work legislation in industrial and office environments. Features A and C frequency weighting and fast and slow time weighting. The large, high contrast digital display includes both digital reading and analogue bar graph

- Handheld or tripod mounting
- Power Range 32-130dB
- Dynamic Range 60dB
- Frequency 20-8000Hz
- Complies with BS EN61672-1:2003
- Supplied with detachable wind shield and hard carry case



Item	Description	Height	Width	Depth	Price
814963	Sound Level Meter	285mm	55mm	25mm	£149.00

Anti-Static Wrist Strap

Lightweight, comfortable anti-static wrist strap

- Adjustable wrist strap ensures 360° protection
- A carbon film resistor is incorporated
- Supplied with 3Mtr coiled cord



Item	Description	Price
993884	Anti-Static Wrist Strap	£3.95

Wrist Strap Tester

Wrist strap tester measures the resistance of wrist straps and heel straps between 0.5MΩ to 10MΩ

- LED indication to show 'pass' or 'fail'
- Low battery indicator
- Requires 1 x PP3 battery
See pg 134



Item	Description	Price
803982	Wrist Strap Tester	£69.00

H30 Evolution TV Signal Meter



The Televés H30 Evolution has multiscreen viewing and remote control, WiFi & Bluetooth connectivity, guided satellite pointing and wideband LNB compatibility

- Light-weight handheld meter
- Multiscreen system with touch control: display the meter screen on a mobile device and control the meter by touch gestures and buttons
- User friendly interface
- WiFi and Bluetooth connectivity
- Wideband LNB supported
- Guided satellite pointing
- Real-time digital processing
- Multi-standard, fully configurable; with WiFi / IPTV analyzers and HEVC display as options
- All measurements are carried out by pressing a single button equipped with Pass/Fail indicators to reduce installation errors



Item	Description	Price
825163	H30 Evolution TV Signal Meter	£1870.63



FINANCE AVAILABLE - SPEAK TO OUR SALES TEAM

Emiter Digiair Pro T2 Digital Terrestrial Meter

For the exact alignment and adjustment of terrestrial antennas

- Made for both analogue and digital signals
- Frequency range of 45-860MHz
- Measures DVB-T, DVB-T2 and DVB-C signals
- Signal level read out in dBuV, dBm, dBmV
- Presents one channel readout with high resolution or six channels simultaneously or the complete spectrum
- Built-in, rechargeable battery - power supply and car-charger included



Item	Description	Price
799115	Digiair Pro T2 Digital Meter	£314.70

Test Equipment

NB-IoT Tester

NB-IoT tester designed for testing signal level in narrowband IoT Cat-M and GSM networks. The NB-IoT Tester measures the signal level in the air at a certain location. It measures continuously and shows the signal strength, both with real-time values, and in the shape of thermometer scales

- Presents digital signals like RSSI, RSRP, RSRQ and SNR
- Built in SIM card reader
- Time recording showing min/max signal level
- Input for external antenna
- Built in rechargeable battery pack
- Includes power supply, rubber case, antenna and owners manual



Item	Description	Mfr Ref	Price
823154	Narrowband IoT Tester	NB-IoT	£557.75



YOUR NUMBER ONE VENDOR NEUTRAL
TEST EQUIPMENT DISTRIBUTOR

COMTEC ▶
AN ETC GROUP COMPANY

 **TREND NETWORKS**



FLUKE
networks



Honeywell



TEMPO
COMMUNICATIONS

BW Icon Multi-Gas Detector

A fixed-life, 2-year, 4 gas detector for the gas hazards that workers face most often. Simply turn it on and activate for two years of protection, with no need for sensor or battery replacement – and no hidden costs

- Small, lightweight, wearable design
- One-button operation
- Up to two months run time on a 4.5 hour charge
- No service required, activate and use for two years



Honeywell

Item	Description	Model	Detectors	Price
827391	Gas Detector	Icon	%LEL(IR), O2, H2S, CO	POA

BW Icon+ Gas Detector

A 4 gas detector unit (GDU) that uses simple icons to display device status and gas levels. There are no live gas readings for users to interpret and no training required

- Small, lightweight, wearable design
- Simple, one-button operation
- Compatible gas (LEL) sensor
- Detects Oxygen, Hydrogen Sulphide, Carbon Monoxide (Sulphur Dioxide available as an option in place of CO)
- Up to two months run time on a 4.5 hour charge
- Compatible with Honeywell IntelliDoX instrument management system

Note: LEL sensor cannot detect Hydrogen and Acetylene



Honeywell

Item	Description	Model	Detectors	Price
827701	Gas Detector	Icon +	%LEL(IR), O2, H2S, CO	POA

Honeywell

Comtec can supply all of your Honeywell Gas Detector calibration and bump test equipment, including IntelliDoX and MicroDock II GDU management systems, calibration gases and flow control valves



Test Equipment

Test & Measurement

BW Gas Alert Quattro Gas Detectors

Rugged and reliable, the Gas Alert Quattro four-gas detector combines a comprehensive range of features with simple one-button operation

- Continuous LCD shows real-time gas concentrations
- Compact and lightweight design makes it comfortable to wear
- Detects LEL, O₂, H₂S and CO
- Bright wide-angled visual alarm bars
- One-button operation and straightforward user interface minimises training
- Comprehensive datalogging and event logging capacity
- IntelliFlash verifies operation and compliance to both the user and supervisors from up to 20ft/6.1m
- Includes rechargeable battery pack and UK power adaptor
- 799427 is the standard configuration



Item	Description	Model	Other	Price
799427	Gas Detector	Gas Alert Quattro 4-Gas	-	POA
815490	Gas Detector	Gas Alert Quattro 4-Gas	c/w Confidence Beep 15 Sec	POA

BW Gas Alert Micro Clip

The easy to wear, slim and compact Gas Alert Micro Clip provides affordable protection from atmospheric gas hazards. For extended battery life, especially in cold weather, choose the Gas Alert Micro Clip XL. This unit offers visual compliance at a glance with the flashing, green IntelliFlashT. Easy one-button operation reduces training time and lets workers focus on the job at hand

- Microclip XL: Low up front cost with a two-year warranty
- Microclip X3: Three-year warranty with new oxygen sensor
- Continuous LCD shows real-time gas concentrations
- Compact and lightweight design makes it comfortable to wear
- Water-resistant
- Simple automatic calibration procedure; compatible with BW MicroDock II automatic test and calibration station
- Full function self-test of sensor, battery status, circuit integrity and audible/visual alarms on start up
- Bright wide-angled visual alarm bars
- Built-in concussion-proof boot
- Multi-language support in English, French, German, Spanish and Portuguese
- Manage your fleet using Fleet Manager II



Item	Description	Model	Price
816447	Gas Detector	Micro Clip XL	POA
825815	Gas Detector	Micro Clip X3	POA

Gas Detector Spares

Spares for Honeywell gas detectors



Item	Description	Mfr Ref	Price
786622	Replacement Power Supply	GA-PA-1-UK	POA
813786	Vehicle Power Adaptor 12-24V DC	GA-VPA-1	POA
828986	Calibration Gas	-	POA
820334	Manual Gas Regulator	-	POA

COMTEC 
AN ETC GROUP COMPANY

Honeywell

**ACCREDITED
UK SERVICE CENTRE**

Tools

- 66 - 72 Tool Kits
- 73 - 77 Tool Storage
 - 78 Hammers
 - 79 Files, Chisels & Punches
- 80 - 86 Pliers & Cutters
- 87 - 89 Screwdrivers & Keys
- 90 - 92 Knives, Saws & Blades
- 93 - 95 Spanners, Sockets & Wrenches
- 96 - 97 Measuring & Fish Tapes
 - 98 Ultima Plugs & Boots
 - 99 Crimping Pliers
- 101 - 102 Cable Terminating
- 103 - 105 Cable Preparation Tools
 - 106 Power Tools & Accessories
 - 107 Knipex Ergostrip & BIX Cutters

Tools



65



ESSENTIAL TOOL KITS AVAILABLE NOW

FULLY CUSTOMISABLE



821230

Blown Fibre Toolkit No.1
Toolbag Option Available



821232

Blown Fibre Toolkit No.2
Toolbag Option Available



823767

Copper Joints Toolkit
ToolBox Option



823769

Fibre Joints Toolkit
Toolbag Option



823809

Tait Tools Hand Toolkit No. 1
Toolbag Option



823810

Tait Tools Hand Toolkit No. 2
Toolbag Option

Bespoke Van Kit

Tailored to your exact requirements
Contact us for details



Contact us today to find out more

GPON Tool Kit

A toolkit comprising the essential tools required for GPON Installations

Toolkit Contains:

- 814854 - OPT ULW 36F Cable Stripper
- 806726 - Slippery Fish Stripper
- 814858 - Replacement blades for Slippery Fish
- 814789 - Fibre Tube Scoring Tool
- 823018 - Diagonal Side Cutters 125mm
- 809585 - Miniature Flush Cutting Nippers 130mm
- 816176 - Ball Ended Long Reach Allen Key Set
- 776867 - Pozidrive Screwdriver PZ2 x 200mm
- 786664 - 20oz Fibreglass Claw Hammer
- 813580 - Adjustable Wrench 300mm
- 813578 - Adjustable Wrench 150mm



Item	Description	Price
815572	GPON Tool Kit	£260.31

Fibre Inspection Tool Kit No.2

A fibre inspection toolkit containing a selection of cleaning, inspection and associated tooling

Toolkit Contains:

- 815204 - Open Tote Bag
- 822887 - Visual Fault Locator
- 827795 - Fibre Sharp Bin
- 803325 - Handheld Microscope x400
- 808915 - Sticklers Cleaning Kit
- 794187 - Splice & Connector Cleaner
- 803939 - Cleanwipes
- 822059 - CleanClicker 1.25mm
- 822058 - CleanClicker 2.5mm
- 794634 - Sharpie Marker Pen
- 100149 - Kevlar Scissors
- 816179 - 3-in-1 Fibre Stripping Tool
- 821534 - 3W LED Headlight
- 783382 - LED Torch
- 809264 - Clear Safety Spectacles



Item	Description	Price
828352	Fibre Inspection Toolkit No 2	£400.36

Electricians Tool Kit No. 1

Our standard electricians toolkit contains a great range of tools to cover most job requirements

Toolkit Contains:

- 815145 Engineers tool bag
- 993292 Longitudinal jacket stripper
- 801475 Steel wire cutter 6mm
- 826546 Heavy duty cable shears (upto)27mm
- 790228 VDE Pliers Set 3 Piece Includes 180mm Combination, 160mm Long Nose, 160mm Side Cutters
- 815587 Cable ringing tool 4-25mm
- 804456 250mm Tin snips
- 994643 VDE Screwdriver Set Slotted & Phillips 7 Piece Insulated 1000V
- 823800 Joiners Hammer Hickory Handle 16oz
- 823801 Joiners Hammer Hickory Handle 8oz
- 816177 5Mtr Measuring tape 772600 6 steel rule
- 993239 12 Senior hacksaw 993817 Pistol grip junior hacksaw
- 992129 Pocket knife 784944 Utility Knife Hi-Viz Retractable Blade
- 823024 Rechargeable Hand Light
- 828122 Safety Glasses
- 813569 CC225 Cold chisel 200mm Adjustable wrench
- 785158 Electricians scissors 993251 8 Round file
- 100244 Cable tie tensioning tool
- 786610 Roll of Black PVC tape
- 794634 Sharpie marker pen



Item	Description	Price
831459	Electricians Tool Kit No. 1	£257.62

Solar PV Installation Tool Kit



Toolkit Contains:

- Ratchet crimping pliers for secure crimping of MC3 and MC4 solar PV cable connectors (2.5, 4.0 & 6mm)
- Dedicated solar PV wire stripping tool for correct length stripping of all types of solar cable
- Cable shears for effortless clean cutting of all sizes of PV cables



Item	Description	Price
787119	Solar PV Installation Tool Kit	£181.81

Hand Tool Kit No.1

Hand Tool Kit No.1 includes a selection of screwdrivers, spanners, pliers adjustable wrenches, a premium caulking gun, hammer, hacksaw, tape measure, spirit level, nippers and cable cutters

Toolkit Contains:

- 815204 16" Open tote bag
- 774424 Jacket stripper
- 813579 8" Adjustable wrench
- 813621 300mm Spirit Level
- 823018 160mm Side cutters
- 823674 160mm Combination pliers
- 823673 160mm Long nosed pliers
- 809585 130mm Flush cutting nippers
- 815596 3Mtr Measuring tape
- 100185 Caulking gun
- 786664 20oz Fibreglass claw hammer
- 993239 12" Senior hacksaw
- Combination spanners 6mm, 7mm, 8mm, 9mm, 10mm, 11mm, 12mm, 13mm
- Screwdrivers Philips PH0x75mm, PH1x100mm, PH2x100mm
- Screwdrivers Pozi PZ1x100mm, PZ2x100mm, PZ2x200mm
- 823022 Work area protection mat



Item	Description	Price
823809	Hand Tool Kit No.1	£105.64

Hand Tool Kit No.2

Toolkit Contains:

- 815145 Engineers tool bag
- 100239 Pipe & tube cutter up to 45mm
- 774424 Jacket stripper
- 813578 6" Adjustable wrench
- 813579 8" Adjustable wrench
- 813621 300mm Spirit Level
- 816178 8Mtr Measuring tape
- 823018 160mm Side cutters
- 823674 160mm Combination pliers,
- 823673 160mm Long nosed pliers
- 809585 130mm Flush cutting nippers
- 100238 Adjustable wire stripper
- 100185 Caulking gun
- 786664 20oz Fibreglass claw hammer
- 823800 16oz Joiners hammer
- 813625 32oz Rubber mallet
- 993239 12" Senior hacksaw
- 813569 25mm Cold chisel
- 813571 60mm Brick bolster
- 100149 Steel Kevlar Scissors
- 809615 7" Cranked Scissors
- Combination spanners 9mm, 10mm, 11mm, 12mm, 13mm
- Screwdrivers Philips PH0x75mm, PH1x100mm, PH2x100mm
- Screwdrivers Pozi PZ1x100mm, PZ2x100mm, PZ2x200mm
- Screwdrivers slotted 3x75mm, 4x150mm, 5x75mm, 6x75mm, 8x200mm
- 787249 17-Comp organizer
- 813567 10" Self grip pliers
- 823708 180mm Cable shears
- 823022 Work area protection mat



Item	Description	Price
823810	Hand Tool Kit No.2	£248.24

Fibre Jointer Tool Kit No.1

The Fibre Jointers Toolkit contains the most essential tools for fibre optic cable jointing as well as general tools for copper cabling and other applications

Toolkit Contains:

- Screwdrivers Pozi PZ1x100mm, PZ2x200mm, PZ3x150mm
- Screwdrivers slotted 4x150mm, 5x75mm, 8x200mm
- 809977 Engineers toolbox
- 827795 Fibre optic sharps bin
- 794634 Permanent marker
- 993292 Jacket Stripper Longitudinal
- 100061 Microduct & tube cutter
- 801475 25mm Cable Cutter
- 804456 10" Tin snips
- 821250 Cable Strip & Ring Tool
- 816179 3-in-1 Fibre optic stripping tool
- 823674 160mm Combination Pliers
- 823673 160mm Long nose pliers
- 823018 160mm Side cutters
- 806646 Dropfibre splitter 36F
- 815587 Jacket stripper 4-25mm
- 996364 Jacket stripper up to 3.2mm
- 807228 Jacket stripper 6.5-14mm
- 992129 Pocket knife
- 993251 8" Round file
- 813579 200mm Adjustable Wrench
- 993251 20mm Round file
- 823800 16oz Joiners hammer
- 993238 4oz Pin hammer
- 772600 12" Steel Rule
- 816177 5Mtr Measuring tape
- 823024 Rechargeable hand light
- 821534 Helmet/Head Torch 3W LED
- 809615 7" Cranked scissors
- 821008 Safety glasses
- 992130 Junior hacksaw
- 993239 12" Senior hacksaw
- 992067 Black PVC tape
- 100244 Cable tie tensioner
- 823022 Work area protection mat
- 823702 Kneeling mat
- 996357 IPA Dispenser



Item	Description	Price
823769	Fibre Jointer Tool Kit No.1	£358.42

Copper Jointer Tool Kit No.1

The Copper Jointers Toolkit contains the most essential tools for copper cabling as well as general tools for other applications

Toolkit Contains:

- 820903 Large toolbox with tote tray
- 993292 Jacket Stripper Longitudinal
- 801475 25mm Cable Cutter
- 801476 250mm Cable shears
- 790228 VDE combination pliers 180mm, VDE longnose pliers 160mm, VDE side cutters 160mm
- 993296 Dropwire stripper
- 815587 Jacket stripper 4-25mm
- 991030 Crimping Pliers for Jelly Crimps 8A-8C
- VDE Screwdrivers Slotted 2.5x85mm, 4.0x200mm, 5.5x125mm, 6.5x150mm
- VDE Screwdrivers Phillips 0x75mm, 1x100mm, 2x100mm
- 813579 200mm Adjustable Wrench
- 992129 Pocket knife
- 823800 16oz Joiners hammer
- 786664 20oz Claw hammer
- 772600 12" Steel Rule
- 815596 3Mtr Measuring tape
- 993817 Junior hacksaw
- 993239 12" Senior hacksaw
- 992067 Black PVC tape
- 100244 Cable tie tensioner
- 804456 10" Tin snips
- 809615 7" Cranked scissors
- 813569 25mm Cold chisel
- 823024 Rechargeable hand light
- 821008 Safety glasses
- 773118 LSA Punchdown tool
- 794634 Twin tip Sharpie
- 823022 Work area protection mat
- 823702 Kneeling mat



Item	Description	Price
823767	Copper Jointer Tool Kit No.1	£272.09

Blown Fibre Tool Kit No.1

Blown fibre tool kit with over 35 tools for preparing, installing and connecting fibre ducting

Toolkit Contains:

- 820902 Small toolbox with tote tray
- 804029 Helmet/Head torch
- 823024 rechargeable hand light
- 809300 Pocket light
- 827795 Fibre optic sharps bin
- 794634 Permanent marker x2
- 801358 Cable Cutter TTC
- 8100239 Pipe cutter 6-45mm
- 790228 VDE combination pliers 180mm, VDE longnose pliers 160mm, VDE side cutters 160mm
- 100149 Steel kevlar scissors
- 809585 Flush cutting nippers
- 809312 Stanley utility knife auto retractable blade
- 993817 Junior hacksaw
- 992067 Black PVC tape
- 782661 Rigger gloves
- 821009 Safety glasses
- 820831 Hand & surface wipes
- 815596 3m measuring tape
- 100061 Microduct & tube cutter
- 793147 Subduct cutter 6-42mm
- 816179 3-in-1 Fibre optic stripping tool



- 808373 Blown fibre microduct rounding & deburring tool
- Screwdrivers Philips PH0x75mm, PH1x100mm, PH2x100mm
- Screwdrivers Pozi PZ1x100mm, PZ2x100mm, PZ2x200mm, PZ3x150mm
- Screwdrivers slotted 3x75mm, 4x150mm, 5x75mm, 6x75mm, 8x200mm
- 823022 Work area protection mat

Item	Description	Price
821230	Blown Fibre Tool Kit No. 1	£219.08

Blown Fibre Tool Kit No. 2

For preparing, installing and connecting fibre ducting

Toolkit Contains:

- 20903 Large toolbox with tote tray
- 804029 Helmet/Head torch
- 823024 rechargeable hand light
- 809300 Pocket light
- 827795 Fibre optic sharps bin
- 794634 Permanent marker x2
- 801358 Cable Cutter TTC8
- 100239 Pipe cutter 6-45mm
- 790228 VDE combination pliers 180mm, VDE longnose pliers 160mm, VDE side cutters 160mm
- 810811 Side cutters
- 100149 Steel kevlar scissors
- 809585 Flush cutting nippers
- 809312 Stanley utility knife auto retractable blade
- 992067 Black PVC tape
- 993817 Junior hacksaw
- 782661 Rigger gloves
- 821008 Safety glasses
- 820831 Hand & surface wipes
- 815596 3m measuring tape
- 100061 Microduct & tube cutter
- 793147 Subduct cutter 6-42mm



- 816179 3-in-1 Fibre optic stripping tool
- 808373 Blown fibre microduct rounding & deburring tool
- 787249 17 Compartment organiser box
- 993292 Jacket Stripper Longitudinal Up to 25mm
- 816176 Hex Key Set (Metric) Ball Ended,
- 808510 Vernier Caliper (L) 150mm
- 990067 Jacket Stripper Cable Dia 6mm-28mm
- 806726 Fibre Optic Drop Cable Slitter
- 814858 Spare blades
- 813580 300mm Adjustable wrench
- 813578 150mm Adjustable Wrench
- 814789 Fibre scoring tool
- 786664 20oz Fibreglass claw hammer
- Screwdrivers Philips PH0x75mm, PH1x100mm, PH2x100mm
- Screwdrivers Pozi PZ1x100mm, PZ2x100mm, PZ2x200mm, PZ3x150mm
- Screwdrivers slotted 3x75mm, 4x150mm, 5x75mm, 6x75mm, 8x200mm
- 823022 Work area protection mat
- 823702 Kneeling mat

Item	Description	Price
821232	Blown Fibre Tool Kit No.2	£352.16

Splicers Tool Kit No.1

Fibre splicers toolkit containing a basic range of tools to aid in splicing jobs

Toolkit Contains:

- 815204 Open tote bag
- 794634 Permanent marker x2
- 821534 Helmet/Head Torch 3W LED
- 100149 Steel kevlar scissors,
- 816179 3-in-1 Fibre optic stripping tool
- 995144 Retractable utility knife
- 815587 Cable Ringing Tool Cable Dia 4mm-25mm
- 993292 Jacket Stripper Longitudinal up to 25mm
- 995143 Straight Tweezers
- 797990 Screwdriver Hex PZ1 100mm
- 440204 Screwdriver Slotted 6mm 75mm
- 782100 Kim Wipes Fibre Optic Cleaning Wipes
- 801475 Steel Wire Cutter (L) 150mm
- 827795 Fibre Sharp Bin Volume 0.5Ltr
- 809264 Safety Glasses Bandido Clear Anti-Scratch / Anti-Fog
- 783382 Lightweight Mini Torch 6 Bright LED's



Item	Description	Price
828731	Splicers Toolkit No.1	£138.89

Splicers Tool Kit No 2

Fibre splicers toolkit containing a basic range of tools to aid in splicing jobs

Toolkit Contains:

- 815204 Open tote bag
- 794634 Permanent marker x2
- 821534 Helmet/Head Torch 3W LED
- 100149 Steel kevlar scissors,
- 816179 3-in-1 Fibre optic stripping tool
- 995144 Retractable utility knife
- 815587 Cable Ringing Tool Cable Dia 4mm-25mm
- 993292 Jacket Stripper Longitudinal up to 25mm
- 995143 Straight Tweezers
- 797990 Screwdriver Hex PZ1 100mm
- 440204 Screwdriver Slotted 6mm 75mm
- 782100 Kim Wipes Fibre Optic Cleaning Wipes
- 801475 Steel Wire Cutter (L) 150mm
- 827795 Fibre Sharp Bin Volume 0.5Ltr
- 809264 Safety Glasses Bandido Clear Anti-Scratch / Anti-Fog
- 783382 Lightweight Mini Torch 6 Bright LED's



Item	Description	Price
828732	Splicers Toolkit No.2	£285.16

Canvas Tool Bag



Heavy duty tool bag made from cotton canvas. Strong webbing handles and heavy duty zip.



Item	Mfr Ref	Height	Width	Length	Price
821263	CB150	150mm	180mm	460mm	£4.17

Engineers Tool Bag



A strong tool bag ideal for storing and carrying a large selection of hand tools and consumables

- External pockets for easy access
- 2 Internal compartments both with a selection of internal pockets for tool organisation
- Includes shoulder strap

MAX LOAD
20Kg



Item	Mfr Ref	Height	Width	Length	Price
815145	TB190	350mm	250mm	480mm	£23.95

Multi Access Bag



Heavy duty tool bag with dual opening storage compartments offering superb organisation and visibility of tools

- Dual-sided opening
- Multiple pockets with space on both sides for power tools and hand tools
- Freestanding rigid structure
- Heavy duty nylon construction
- Reinforced plastic base
- Bag length 17" (430mm)



Item	Mfr Ref	Description	Price
805585	FMST1-73607	Multi Access Bag	£52.79

Open Tote Bag



A strong and durable open-mouth bag with multiple internal and external pockets for easy organisation and access to tools

- Waterproof reinforced plastic base
- Adjustable shoulder strap
- Bag length 16"



Item	Mfr Ref	Description	Price
815204	TB160	Open Tote Bag	£24.95

Hi-Viz Tool Bag



Multi purpose tool bag, manufactured from polyester with a robust solid base

- Hi-viz reflective straps
- Shoulder strap
- 7 Internal and 23 external pockets of various sizes



Item	Height	Width	Length	Price
821288	280mm	260mm	600mm	£29.87

Overhead Tool Bag



A strong tool bag designed for telecommunications engineers working on telegraph poles. It can hold a large selection of hand tools and consumables and can be hoisted up with the included lifting hanger

- External pockets for easy access
- Selection of internal pockets for tooling and consumable organisation and storage
- Includes shoulder strap and bag lifting hanger



MAX LOAD
15Kg



Item	Mfr Ref	Height	Width	Length	Price
822149	OB300	400mm	225mm	300mm	£18.95

Tools

Tool Backpack

The Stanley backpack/rucksack has a zip fastening design from top to bottom that allows the backpack to open in two halves. Complete with internal compartment pockets for easy tool storage



- Two side pockets for storage of larger items
- Back pocket for documents and manuals
- Heavy duty 600 denier fabric for long lasting durability
- Rigid waterproof plastic materials for protection against dirt and moisture
- Separate internal compart ideal for a laptop



Item	Description	Price
808356	Tool Backpack / Rucksack	£47.41

Belt Pocket

Heavy duty tool pouch with belt



- 5 Pockets for storing tools and consumables
- Reinforced base to prevent tools and screws piercing



Item	Description	Width	Length	Price
820915	Tool Pouch Belt	295mm	365mm	£11.75

Tool Apron

The Stanley tool apron is made from hard wearing, strong and durable 600 x 600 denier fabric. It has multiple pockets and loops to provide maximum organisation



- The tool belt comes complete with a tape pocket and an integrated hammer loop to keep these tools at convenient reach
- Ergonomic back padding for safety and comfort
- Dimensions: 60 x 25.5 x 7.5cm



Item	Mfr Ref	Description	Price
790084	1-96-178	Tool Apron	£18.12

Vest

A comfortable to wear and versatile tool vest designed to aid smooth workflow



- Reinforced pockets and tethering points



Item	Description	Price
816450	Professional Tool Vest	£29.95

Technicians Backpack Toolcase

Reinforced backpack equipped with multiple pockets and storage, designed for engineers



Item	Description	Material	Height	Width	Depth	Price
831165	Technician Backpack Tool	600D Polyester	470mm	184mm	356mm	£75.20

Technicians Toolcase

Black polyester tool case offering stability, durability and high capacity



- Equipped with a transverse transport bar a solid grip
- Shoulder strap with metal hooks
- Rigid base



Item	Description	Material	Height	Width	Depth	Price
832852	Technician Tool Case	600D Polyester	330mm	241mm	419mm	£63.45

Technician's Case on Wheels With Telescopic Handle

This smartly designed case offers technicians a practical solution for transport.



- Multiple exterior front and side pockets
- Large capacity
- Robust design



Item	Description	Material	Height	Width	Depth	Price
832851	Technician Tool Case on Wheels	600D Polyester	241mm	343mm	457mm	£98.70

Lightweight Tool Boxes

Sturdy and robust tool boxes with generous storage capacity for a wide variety of tools



- Manufactured from impact-resistant polypropylene with comfortable soft-grip carry handle
- Removable tote tray
- Metal latches for secure locking with padlock eye



Item	Description	Material	Height	Width	Depth	Price
820902	Toolbox With Tote Tray Small	Polypropylene	220mm	470mm	210mm	£21.78
820903	Toolbox With Tote Tray Large	Polypropylene	298mm	582mm	255mm	£31.49

Galvanised Metal Toolbox

- Tough resin combined with metal for strength and durability
- Long metal hinge to carry the heavy loads
- Large metal latches - heavy duty, strong, rust proof
- Portable tray - for hand tools and small parts
- Holes ready for inserting a lock for maximum security for your tools
- V-Groove on top lid for any on site sawing and adjustment needs



Item	Description	Mfr Ref	Height	Width	Depth	Price
790716	Toolbox 30L With Tote Tray	1-95-618	293mm	497mm	222mm	£27.40

Waterproof Toolbox

The Stanley FatMax waterproof toolbox has an all round water seal to ensure safe and dry storage

- Extra large storage capacity with portable tote tray
- Integrated V-groove on lid top enables sawing
- Tough ergonomic soft-grip handle
- Large metal rust proof latches for secure closing



Item	Description	Mfr Ref	Height	Width	Length	Price
816434	Waterproof Toolbox	1-94-749	267mm	305mm	584mm	£29.04

Mobile Contractor Chest

A professional all-weather toolbox from Stanley. 100% waterproof, it has been made to the highest standards and tested rigorously to ensure maximum durability for the toughest jobs

- Portable tote tray ideal for storing and carrying small tools and accessories
- A must for tradesmen working out in the elements
- Tough soft-grip handle designed to ensure a firm, comfortable grip
- Waterproof seal



Item	Description	Mfr Ref	Height	Width	Depth	Price
821503	Mobile Contractor Chest	1-97-503	610mm	380mm	430mm	£41.44

Professional Mobile Tool Chest

Professional mobile tool chest providing easy transportation and storage for larger tools and workshop materials

- Transpernt polycarbonate organiser
- Soft side pocket organiser and removable tote tray
- Removable cups for small accessories
- Wide telescopic steel handle with soft-grip
- Heavy-duty road tested wheels



Item	Description	Mfr Ref	Price
821505	Tool Chest	1-75-531	£119.06



3in1 Tool Organiser

Stanley 3 in 1 tool organiser made from 2mm polypropylene plastic so it is tough and durable

- Movable dividers
- Central rigid tote suitable for hand tools
- Each side is fitted with a polypropylene lid to keep everything in place
- 15Kg Weight limit



Item	Description	Mfr Ref	Price
821296	3 in 1 Tool Organiser	71963	£38.40

Compartment Organisers

Professional 17 compartment organiser

- Durable polypropylene construction
- Moveable dividers allowing customisable layout
- Locking lid



Item	Description	Mfr Ref	Width	Depth	Length	Price
787249	17 Compartment Organiser	SB100	290mm	67mm	375mm	£5.49

Stackable Storage Bins

Semi-open fronted storage containers

- One piece injection moulded plastic storage bins
- Strong, heavy duty with reinforced base, sides and stacking rim
- Can withstand high temperatures from 15°C to 50°C
- 48 Litre Capacity



Item	Description	Material	Height	Width	Depth	Price
818400	Really Useful Box	Plastic	310mm	400mm	600mm	£18.05

Pin Style Hammers

Forged steel cross pein pin/tack hammer with polished striking face



Item	Shaft	Weight	Price
993238	Hardwood Handle	4oz	£4.14
789421	Fibreglass Handle	4oz	£3.50

Warrington Style Joiners Hammer



Warrington style joiners hammer with straight cross pein opposite the striking face, designed for starting a panel pin between finger and thumb or for driving nails into corners where the round face will not fit



- Designed for light woodwork and general use

Item	Shaft	Weight	Price
823800	Hickory Handle	16oz	£6.49

Engineers Hammers

Forged steel head engineers hammer with polished striking face and hardwood shaft



Item	Shaft	Weight	Price
785076	Hardwood Handle	16oz	£7.65

Fibreglass Claw Hammers



Drop-forged carbon steel hammerhead

- Head treated
- Ground polished
- Fibreglass shaft
- Softgrip finger moulded handle



Item	Shaft	Weight	Mfr Ref	Price
823653	Fibreglass Handle	16oz	CH116	£5.09
786664	Fibreglass Handle	20oz	CH120	£6.35

Hardwood Club Hammers

Used in the demolition and striking of cold chisels and brick bolsters

- Powder coated head with polished face
- Varnished ash shaft



Item	Description	Weight	Price
795618	Hardwood Club Hammer	2lb	£7.76
994243	Hardwood Club Hammer	4lb	£11.41

Fibreglass Handle Club Hammers

Drop forged, heat treated steel head club hammer with round, double faced polished striking surfaces



Item	Handle	Weight	Price
794934	Fibreglass Handle	2.2lb	£8.01
798954	Fibreglass Handle	4lb	£11.75

Rubber Mallet

Tait Tools rubber mallet with a solid rubber head and wooden shaft

- The head delivers a firm but gentle strike where a steel head is unsuitable
- Contoured wooden handle provides a comfortable grip



Item	Description	Weight	Mfr Ref	Price
813625	Rubber Mallet	32oz	RM032	£7.28



Sledge Hammer

Double faced sledge hammer complete with 'Grade A' hickory shaft



Item	Description	Weight	Price
816021	Sledge Hammer	14lb	£30.26

Paving Maul



The Roughneck paving maul is fitted with a high density, cylindrical rubber head and 900mm (36") fibreglass handle. Ideal for bedding heavy-duty slabs



Item	Description	Weight	Price
813085	Paving Maul Fibreglass	6Kg	£63.20

Bradawl

Chisel blade with plastic handle



Item	Description	Price
794765	Bradawl 1/8"	£1.97

Bevel Edged Wood Chisel Set



Full length bevel edged blade chisel set manufactured from carbon steel, hardened, tempered, finely ground and clear lacquer coated for corrosion protection

- Impact resistant polypropylene handles
- Blade guards included
- 6, 12, 20 & 25mm blade widths



Item	Description	Set	Price
821305	Bevel Edge Wood Chisel Set	4 Piece	£21.81

Cold Chisels with Hand Grip



Cold chisel made from high quality steel, hardened and tempered to British Standards

- Handguard for increased comfort and protection from overstrike



Item	Mfr Ref	Blade Width	Length	Price
813570	CC125	19mm	250mm	£4.11
813569	CC225	25mm	250mm	£6.56

Brick Bolsters with Hand Guard



Tait Tools brick bolsters are designed for cutting bricks and other general building use

- Drop forged from carbon steel
- Induction hardened and tempered to British Standards
- Handguard for increased comfort and protection from overstrike



Item	Description	Mfr Ref	Size	Price
813571	Brick Bolster with Hand Guard	BB060	60mm	£6.95
813573	Brick Bolster with Hand Guard	BB100	100mm	£9.33

Electricians/Telecomms Plier



Electricians' pliers from Knipex are the perfect pliers for wiring jobs - for stripping insulation, crimping wire end sleeves, gripping and bending wires

- Length 160mm
- Precision wire stripping and cutting
- With highly precise cutting for medium-hard and hard wires
- Vanadium electric-steel, forged, oil-hardened
- Blades also induction-hardened
- Polished head
- Plastic-coated handles



Item	Description	Mfr Ref	Price
789419	Electricians/Telecoms Plier	13 01 160	£29.53

Electronic Super Knip



Knipex electronic super-knips ESD 125mm precision pliers designed for ultra fine cutting work, particularly in electronics

- Ground, very sharp cutting edges without bevel for flush cutting
- Precision shaped tips cut wires resting on a board from 0.2mm diameter
- Joint with stainless steel rivet
- Cutting edge hardness approx. 54 HRC
- Extremely smooth movement
- Multi-component grips



Item	Description	Price
796300	Side Cutter	£16.98

Electronic Flush Cutters

Tool for a flush cut. The reduced size and refined style of this tool make it ideal for work in tight places and for delicate electronic work

- TR58 - The special treatment of the blades make this tool particularly suitable for cutting ferrous material



Item	Description	Mfr Ref	Thickness	Cutting Force	Length	Price
785402	Electronic Side Cutters Flush Cut	TRE03NB	2.5mm	3Kg	138mm	£5.15
785404	Electronic Side Cutters Flush Cut	TR20M	2mm	5Kg	118mm	£9.90
785409	Electronic Side Cutters Flush Cut	TR25	2.5mm	5Kg	138mm	£9.96
785401	Electronic Side Cutters Flush Cut	TR30	3mm	5.5Kg	128mm	£9.77
785403	Electronic Side Cutters Heavy Duty	TR58	3mm	9Kg	137mm	£13.47

Flush Cutting Nipper



Mini flush cutting nippers

- Manufactured from carbon steel and it is hardened and tempered for cutting copper wire up to 1mm diameter
- Chemically blacked finish to reduce glare
- Cushioned grips and steel return spring for increased comfort during repetitive cutting



Item	Description	Mfr Ref	Length	Price
809585	Flush Cutting Nipper	CP411	130mm	£4.95

Electronic Long Nose Plier

Long nosed electrician side cutting pliers

- Mini pliers for precision work
- Drop forged
- Double-dipped handles for added comfort
- Jaw capacity: 25mm
- Length: 120mm



Item	Description	Length	Price
786618	Long Nose Electronics Plier	120mm	£1.98

Side Cutting Pliers



Knipex side cutting pliers are induction hardened to cut hard, medium and soft wires

- Hardened cutting edges to 62HRC
- Plastic coated handles



Item	Model	Description	Length	Price
788103	70 01 140	Cutting Pliers	140mm	£15.68
100059	70 01 160	Cutting Pliers	160mm	£15.95

Diagonal Cutting Pliers

Diagonal side cutting pliers

- Ideal for cutting wires and small diameter cables



Item	Description	Length	Price
992128	Diagonal Side Cutters	125mm	£9.23
993233	Diagonal Side Cutters	110mm	£3.75

Diagonal Side Cutting Plier



General duty diagonal side cutters made from forged carbon steel hardened and tempered. Cutting edges additionally induction hardened, suitable for cutting medium/hard wire up to 2.5mm diameter

- Polished and lacquered heads
- PVC dipped handles



Item	Description	Length	Price
810811	Side Cutting Plier	145mm	£6.79

Side Cutting Plier



Heavy duty diagonal side cutting pliers

- Heavy duty chrome vanadium
- Induction hardened & tempered cutting edges
- 2-tone soft-grip handles with slip guards
- Supplied with tethering hole in the handle



Item	Description	Mfr Ref	Length	Price
823018	Side Cutting Plier	PS116	160mm	£5.50

Combination Plier



Heavy duty combination plier

- Chrome vanadium
- Induction hardened & tempered cutting edges
- Supplied with tethering hole in the handle



Item	Description	Length	Price
823674	Combination Plier	160mm	£4.95

Long Nose Pliers



Long nose pliers, drop-forged from chrome vanadium steel, hardened and tempered with induction hardened cutting edges



Item	Description	Mfr Ref	Length	Price
823673	Long Nose Pliers	PL116	160mm	£5.50
786656	Long Nose Pliers	PL200	200mm	£5.75

3 Piece Plier Set 160mm

Set of 160mm side cutting, combination and long nose pliers

- Chrome vanadium steel
- Induction hardened and tempered cutting edges
- Handles with tethering hole



Item	Description	Price
825380	3 Piece Plier Set	£13.95

Taper/Long Nose Plier

General purpose wiring pliers with taper nose jaws and moulded handles

- Hardened and tempered with induction hardened cutting edges



Item	Description	Length	Price
992126	Long Nose Plier	160mm	£12.77

Redline Long Nosed Plier

A pair of long nose pliers from Draper Redline fitted with cushion-grip PVC dipped handles for added comfort

- Manufactured from hardened and tempered carbon steel
- Jaws and cutting edges purposely induction hardened keeping them sharper for longer
- Fitted with cushion-grip PVC dipped handles for comfort



Item	Description	Length	Price
789825	Long Nose Plier	160mm	£3.97

Taper Nose Plier

General duty, forged carbon steel correctly hardened and tempered taper nose pliers

- Cutting edges additionally induction hardened
- Polished and lacquered heads
- PVC dipped handles



Item	Description	Mfr Ref	Length	Price
993230	Taper Nose Plier	7052	200mm	£7.03

Flat End Cutting Plier

Cutting pliers with moulded handles

- Hardened & tempered with induction hardened cutting edges



Item	Description	Length	Price
440123	End Cutting Plier	150mm	£3.58

Adjustable Jacket Stripping Pliers

Adjustable jacket stripping pliers

- Also known as BT Stripper Wire 2



Item	Description	Price
100238	Adjustable Jacket Stripping Pliers	£4.94

Long Nose Pliers

Long nose pliers, drop-forged from chrome vanadium steel, hardened and tempered with induction hardened cutting edges

- Bi-material handles for better grip and added comfort
- Supplied with tethering hole in the handle



Item	Description	Price
823687	Long Nose Pliers	£8.34

11 Piece VDE Plier & Screwdriver Set

Fully insulated and tested to 1000 volts. The set includes 7 screwdrivers and 3 pliers each with soft grip handles as well as a voltage tester all supplied packaged in a handy storage case

- 4 Slotted screwdrivers: 3 x 75mm, 4 x 100mm, 5.5 x 125mm, 6.5 x 150mm
- 3 Philips screwdrivers: No.0 x 75mm, No.1 x 100mm, No.2 x 100mm
- Voltage test screwdriver with pocket clip: 100 - 250v testing range
- 6" VDE diagonal cutting pliers
- 8" VDE long nose pliers
- 8" VDE combination pliers



Item	Size	Price
833456	11 Piece Insulated 1000V	£38.86

12 Piece VDE Plier & Screwdriver Set

A range of VDE 1000v IEC60900 compliant insulated pliers and screwdrivers

- 8" Side cutting, long nose and combination pliers
- 6.5" Side cutting and combination pliers
- Screwdrivers included:
 - PH2 x 100mm
 - PH1 x 80mm
 - Slotted 8 x 175mm
 - 6 x 150mm
 - 5.5 x 125mm
 - 4 x 100mm
 - 3 x 100mm



Item	Size	Price
823062	12 Piece Insulated 1000V	£44.39

VDE Pliers Set

A set of pliers including 180mm combination, 160mm long nose, 160mm side cutters

- Insulated VDE handles



Item	Description	Price
790228	VDE Pliers Set 3 Piece	£25.01

VDE Side Cutter

Chrome vanadium satin finished steel side cutters

- 2 tone soft-grip handles
- Fully VDE certified



Item	Description	Length	Price
786578	VDE Side Cutter 1000V	160mm	£11.96

VDE Combination Plier

Chrome vanadium satin finished steel combination pliers

- 2 tone soft-grip handles
- Fully VDE certified



Item	Description	Length	Price
785032	Combination Plier 1000V	180mm	£11.19

VDE Long Nose Plier

Chrome vanadium satin finished steel long nose pliers

- 2 tone soft-grip handles
- Fully VDE certified



Item	Description	Length	Price
785038	VDE Long Nose Plier 1000V	160mm	£10.40

Tools

VDE 1000v Cable Shears

Cable shears for cutting copper and aluminium cables

- Suitable for single wire or multi-strand wire cables
- Up to 50mm²



Item	Description	Type	Length	Price
823708	Cable Shear	Insulated	180mm	£40.77

Cable Shear

Hand cable shears

- Suitable for cables up to 25mm



Item	Description	Length	Price
801475	Cable Cutter	160mm	£5.25

Cable Shear

Expert quality cable shears manufactured from chrome nickel steel hardened and tempered with two hardened cutting zones - one for fine cable, the other for 6mm cable

- Polished head with lacquered finish
- Special non slip cushion-grip handles
- Cable Size 30mm
- Type: Copper or Aluminium



Item	Description	Mfr Ref	Length	Price
776677	Cable Shear	39258	210mm	£21.04

Cabling Cutters

Handheld cable cutters, in 3 sizes for cables up to 50mm

- Hi-visibility yellow handles
- Perfect for cutting and stripping cables up to 25mm, 35mm and 50mm



Item	Description	Price
992133	Cable Cutting 25mm	£16.03
801358	Cable Cutting 35mm	£ 17.10
801359	Cable Cutting 50mm	£23.10

Cable Shear

Hand cable shears

- Suitable for cables up to 25mm



Item	Description	Length	Price
801476	Steel Wire Cutter	250mm	£7.07

Small Hand Ratchet Plier

Hand ratchet cable cutter

- Suitable for cables up to 240mm² single core copper/aluminium cables
- Not suitable for armoured cable



Item	Description	Price
825116	Hand Ratchet Cable Cutter	£109.05

Heavy Duty Hand Ratchet Cable Cutter

Hand ratchet cable cutter with extendable handles

- Suitable for cables up to 400mm² single core copper/aluminium cable
- Not suitable for armoured cable



Item	Type	Price
825117	Heavy Duty	£129.83

Heavy Duty SWA Ratchet Cable Cutter

Heavy duty cable cutter suitable for copper and aluminium cables up to 52mm and SWA cable up to 36mm

- High-grade special tool steel cutting jaws, forged and hardened for an extended working life
- Heavy duty ratchet action for the effortless cutting of large diameter cable



Item	Description	Length	Price
804132	SWA Ratchet Cable Cutter	280mm	£196.68

Heavy Duty Cable Shear

Heavy duty cable shears with high-grade steel cutting jaws, forged and hardened for an extended working life

- Parrot-beak cutting jaws to prevent cable slippage
- For large diameter copper and aluminium cables up to 27mm



Item	Description	Length	Price
826546	Heavy Duty Cable Shear	550mm	£31.96

CoBolt Compact Angled Bolt Cutters



The Knipex CoBolt compact bolt cutters have precision cutting edges, ideal for cutting items such as cable basket, screws, nails, rivets, etc. to Dia 5.2mm

- Induction hardened cutting edges
- Cutting edge hardness is approx. 64 HRC
- Opening spring/locking device in handles for comfortable work



Item	Description	Mfr Ref	Price
804647	CoBolt Angled Bolt Cutters	71 22 200	£47.34

Waterpump Pliers

Waterpump pliers made from forged chrome vanadium steel by CK



- Box joint design offers strength and durability
- Slim head and jaw for confined spaces
- PVC coated handle for grip and comfort
- Length 175mm & 250mm



Item	Mfr Ref	Description	Length	Price
784960	T3650	Waterpump Pliers	175mm	£22.23
784961	T3650	Waterpump Pliers	250mm	£27.36

Self Grip Curved Jaw Locking Pliers



Professional quality, curved jaw pliers by Draper, steel hardened and tempered

- Curved pattern jaw pliers
- Serrated gripping surfaces
- Adjustable opening with quick-release lever



Item	Description	Mfr Ref	Length	Price
100231	Curved Jaw Pliers	35367	140mm	£10.89

Self Grip Curved Jaw Locking Pliers



Mole grip locking pliers with high quality steel jaws

- Curved pattern jaw pliers
- Serrated gripping surface
- Adjustable opening with quick release lever



Item	Type	Mfr Ref	Length	Price
813567	Curved Jaw	MG250	250mm	£8.07

Mini Trunking Cutter

Mini trunking cutter suitable for cutting square or rectangular trunking up to 32mm



- Ratchet action
- Suitable for cutting PVC conduit, blue water mains, plastic pipe, rubber hose, pneumatic pipe, electrical sleeving, etc
- Complete with special adaptor for straight or mitre cutting of small rectangular cross-section trunking



Item	Mfr Ref	Description	Price
809757	430003	Mini Trunking Cutter	£27.91

Pipe, Conduit & Duct Cutter

The combination of a ratchet cutting action and a lopper blade makes this plastic conduit cutting tool highly effective

- The blade works against an anvil jaw which holds the pipe securely while pressure is increased



Item	Description	Duct Dia	Price
771917	Pipe, Duct & Conduit Cutter	(up to) 42mm	£8.41

Subduct Cutters & Blades



Die-cast aluminium body subduct cutters with stainless steel blade

- Suitable for use on ABS plastic, vinyl, PVC, polythene pipe and conduit
- Trigger operated with 26mm and 42mm pre-set switch
- Quick blade return button
- Max diameter 42mm



Item	Description	Diameter	Price
793147	Subduct Cutter	6-42mm	£31.96
300021	Blade for Subduct Cutter	-	£6.28

Tools

Pipe & Tube Cutter



Tait Tools general purpose pipe and tube cutters

- Cutting dimensions from 6-45mm
- Suitable for cutting copper, bronze, aluminium, plastic, HDPE and steel tubes



Item	Description	Price
100239	Pipe & Tube Cutter	£19.95

Duct Cutter

Circumferential cutter for pipes, ducts and cables

- Cased with wheel drift
- Duct Dia 13-44mm



Item	Description	Price
993291	Duct Cutter c/w Spare Wheel	£30.83

Straight Cut Tinsnips

Straight cutting tinsnips, drop forged for increased durability

- Accurately ground blades with a nut and bolt joint design



Item	Description	Length	Price
804456	Straight Tin Snips	250mm	£6.73

Cranked Scissors



General purpose cranked scissors for jointing applications



Item	Description	Length	Price
809615	Cranked Scissors	7"(180mm)	£6.15

Scissors

Blunt tip pocket scissor



- Forged and hardened steel for long term performance
- Nickel plated for protection
- Screw adjustment



Item	Description	Length	Price
993247	Scissors	115mm	£8.44

CK Lightweight Scissors

Lightweight scissors with stainless steel blades and comfortable moulded plastic handles



- Riveted blades
- 160mm length
- Moulded plastic handle for comfort



Item	Description	Mfr Ref	Length	Price
785380	Lightweight Scissors	C8419	160mm	£8.57

COMTEC
AN ETC GROUP COMPANY

LOOK OUT FOR REGULAR OFFERS ON OUR SOCIAL MEDIA CHANNELS

FOR MORE SCISSORS
SEE PAGE 22

Slotted & Phillips Screwdriver Set

Uninsulated slotted and Phillips screwdriver set made from high quality Steel. Ergonomic handle for a comfortable grip and ease of use

- Slotted screwdriver sizes [mm] : 3.5 x 100 - 4 x 125 - 5.5 x 150 and 6.5 x 150
- PH Phillips screwdriver sizes [mm] : PH1 x 80 and PH2 x 100



Item	Description	Price
831164	Slotted & Phillips Screwdriver Set (6 pieces)	£21.30

7 Piece VDE Screwdriver Kit

Expert VDE Screwdriver set

- Contains: slotted 2.5 x 85mm, 4.0 x 100mm, 5.5 x 125mm and 6.5 x 150mm. Phillips No. 0 x 75mm, No. 1 x 100mm and No. 2 x 100mm
- Fully certified to EN60900IEC



Item	Description	VDE Rating	Price
994643	VDE Screwdriver Set	1000V	£11.14

Precision Screwdriver Set

Phillips, Torx and slotted precision screwdriver set

- Includes: PH000, PH00, PH0
- TX5, TX6, TX7, TX8, TX9, TX10
- 1mm, 1.5mm, 2mm



Item	Description	Set	Price
785074	Precision Screwdriver Set	12 Piece	£7.13

7 Piece VDE Screwdriver Kit

VDE approved fully insulated screwdrivers tested to 10kV, suitable for working on live circuits up to 1kV AC and 1.5kV DC

- S2 steel blades hardened, tempered and chemically blacked
- 4 plain slot size: 2.5 x 75, 4.0 x 100, 5.5 x 125 and 6.5 x 150mm
- 2 PZ TYPE: No.1 x 80 and No. 2 x 100mm
- Mains tester (to GS/TUV and "Low Voltage Directive 73/23/EEC - amendment 98/68/EEC")



Item	Description	Mfr Ref	Price
812667	VDE Screwdriver Set	46540	£14.94

11 Piece Softgrip Screwdriver Set

Softgrip screwdriver set with insulated chrome vanadium shafts with hardened and tempered tips

- 2 colour, soft grip handles
- Contains: slotted 2.5 x 75mm, 3 x 100mm, 4 x 100mm, 5 x 125mm, 6 x 150mm and 8 x 175mm; Phillips PH0 x 60, PH0 x 75, PH1 x 80, PH1 x 100 and PH2 x 100mm



Item	Description	Price
784787	Screwdriver Set	£16.21

Screwdriver Sets

Professional screwdriver sets with bi-material handles for extra grip and comfort

- Bi-material handles for extra grip and comfort
- Includes PH0, PH1, PH2, PZ1, PZ2, PZ3, PH0 & Slotted 3mm, 4mm, 5mm, 6mm & 8mm
- Supplied in a case



Item	Description	Set	Mfr Ref	Price
823813	Screwdriver Set	12 Piece	SS012	£15.95

Tools

Slotted Screwdrivers



Professional screwdriver with bi-material handles for extra grip and comfort

- Parallel tips for easy access



Item	Description	Blade Length	Mfr Ref	Price
440120	Slotted 3mm	75mm	SS375	£1.01
809446	Slotted 4mm	150mm	SS415	£1.33
440203	Slotted 5mm	75mm	SS575	£1.40
440204	Slotted 6mm	75mm	SS675	£1.22
789828	Slotted 8mm	200mm	SS820	£2.18

Phillips Screwdrivers



Professional screwdriver with bi-material handles for extra grip and comfort

- PH1 and PH2 have hexagon bolsters which enable extra power to be obtained by use of a spanner



Item	Description	Blade Length	Mfr Ref	Price
809444	Phillips PH0	75mm	SH075	£1.01
440206	Phillips PH1	100mm	SH110	£1.41
100203	Phillips PH2	100mm	SH210	£1.60

Pozidrive Screwdrivers



Professional screwdriver with bi-material handles for extra grip and comfort

- Shafts have hexagon bolster which enable extra power to be obtained by use of a spanner
- Size PZ1, PZ2 & PZ3



Item	Description	Blade Length	Mfr Ref	Price
797990	Pozi PZ1	100mm	SZ110	£1.56
100289	Pozi PZ2	100mm	SZ210	£1.79
776867	Pozi PZ2	200mm	SZ220	£2.01
440205	Pozi PZ3	150mm	SZ315	£2.12

Ratcheting Screwdriver Set



Chrome plated blade with powerful 1/4" magnetic bit holder and ratchet for forward/reverse and lock

- The set is supplied with 12 hardened and tempered chrome vanadium steel 1/4" bits x 25mm long and a 55mm long magnetic bit extension holder
- Bits are stored in handle
- 4 plain slot bits size: 4, 5, 6 and 7mm
- 4 cross slot bits: No.0, 1, 2 and 3
- 4 PZ TYPE bits: No.0, 1, 2 and 3



Item	Description	Mfr Ref	Price
815725	Ratcheting Screwdriver c/w Bit Set	67543	£7.14

Insulated Torx Screwdrivers



An electrician's screwdriver with an insulated blade by Unior, made according to standard EN60900

- Hardened, tempered, premium hard chrome vanadium steel blade
- Ergonomic shaped handle
- Available in a variety of sizes



Item	Description	Blade Length	Size	Price
811105	Insulated	100mm	TX10	£4.39
811106	Insulated	100mm	TX20	£5.09
811103	Insulated	200mm	TX30	£8.06

SIGN UP
TO RECEIVE PRODUCT NEWS & OFFERS VIA EMAIL
www.comtecdirect.co.uk

Screwdriver Bit Sets

25mm Long 1/4" bits manufactured from chrome vanadium steel hardened and tempered with a shot blast finish. Bit holder manufactured from zinc alloy steel with chrome plated finish. Supplied in storage case

- 1 x Magnetic bit holder
- 8x Plain slot bits size: 3.5 mm (x3), 5.5mm (x3) and 6.0mm (x2)
- 19x PZ TYPE bits: No.1 (x5), No.2 (x10) and No.3 (x4)
- 2x TX-STAR bits T10 and T20
- 3x Hexagonal bits size 4, 5 and 6mm



Item	Description	Set	Mfr Ref	Price
812669	Screwdriver Bit Set 1/4" Hex	33 Piece	82386	£5.87

Screwdriver & Security Bit Sets

High quality hardened chrome vanadium steel screwdriver bit sets

- Includes commonly used sizes
- Includes bit holder and case
- Hardened chrome vanadium for extended product service



Item	Description	Set	Price
786567	Screwdriver Bit Set 1/4" Hex	33 Piece	£4.15
784867	Security Bit Set 1/4" Hex	33 Piece	£4.38

Magnetiser/Demagnetiser

This product instantly magnetises screwdrivers, tweezers and other ferrous tools. The demagnetiser works with electronic equipment, and prevents damage to the product

- Available in green
- Instant results
- 50mm x 55mm x 50mm



Item	Description	Price
784709	Magnetiser/Demagnetiser for Screwdrivers	£3.57

BESPOKE TOOL KITS AVAILABLE
CALL YOUR ACCOUNT MANAGER FOR DETAILS

Ball Ended Hex Key Sets

Ball ended hex key sets manufactured from CV steel. Hardened and tempered for strength and durability

- Ball ended for use at an angle of up to 250 where access is restricted
- Set is supplied in a clip holder for convenient storage
- Contains sizes 1.5, 2, 2.5, 3, 4, 5, 6, 7, 8 & 10mm



Item	Description	Set	Mfr Ref	Price
785136	Hex Key Set (Imperial)	9	T4444I	£15.02
786514	Hex Key Set (Metric)	10	T4443M	£15.02

Metric Allen Key Set - 9pcs



A set of metric allen keys stored in a convenient holder

- Hardened and tempered for strength and durability
- Sizes included:- 1.5mm, 2mm, 2.5mm, 3mm, 4mm, 5mm, 6mm, 8mm, 10mm
- Stored in a handy holder which pivots for easy access to all keys



Item	Description	Mfr Ref	Price
830563	Allen Key Set Metric	T4407	£6.02

Colour-Coded Ball-End Hex Key Sets Metric



- Manufactured from hardened and heat treated Chrome Vanadium steel with a fully polished finish
- Keys range in length from 65mm to 175mm & in size from 1.5mm to 10mm
- Colour-coded rubber coating for comfort, control & fast identification
- 9 piece set containing 1.5, 2, 2.5, 3, 4, 5, 6, 8 & 10mm sizes



Item	Description	Price
816176	Hex Key Set Metric	£12.76

Tools

5 in 1 Hacksaw

The Stanley FatMax 5 in 1 hacksaw is a multi-purpose saw for cutting a range of materials

- Blade can be quickly positioned to a 45 degree angle for making flush cuts
- The front section of the frame can be removed like a jabsaw
- Blade can be attached to the front of the hacksaw frame for inside cuts



Item	Description	Mfr Ref	Price
811862	5 in 1 Hacksaw	0-20-108	£24.21

Senior Hacksaw



Senior hacksaw with 300mm cast aluminium handle and high-tension blade tightening mechanism



Item	Description	Mfr Ref	Blade	Price
993239	Senior Hacksaw	SH200	300mm	£6.95

Senior Hacksaw Blades

Bi-metal hacksaw blades

- Available in 18tpi, 24tpi and 32tpi
- 300mm in length



Item	Description	TPI	Length	Price
994139	Hacksaw Blades	18tpi	300mm	£0.95
825467	Hacksaw Blades	24tpi	300mm	£0.95
786659	Hacksaw Blades	32tpi	300mm	£0.95

Junior Hacksaws

Junior hacksaws which take standard 150mm junior blade

- Available as standard (992130) or pistol grip (993817)



Item	Description	Type	Blade	Price
992130	Junior Hacksaw	Standard	150mm	£1.41
993817	Junior Hacksaw	Pistol Grip	150mm	£2.95

Junior Hacksaw Blades

Junior hacksaw blades suitable for any 150mm junior hacksaw

- 150mm



Item	Description	TPI	UoM	Price
993243	Hacksaw Blades	32tpi	Pk of 10	£1.75

Handsaw



3 sided teeth are precision ground to offer razor sharp cutting edges at every stage of the stroke. They are induction hardened to stay sharper for longer

- Fine cut blade 11tpi
- Length 500mm



Item	Description	Blade Type	Mfr Ref	Price
811861	Handsaw	Fine Cut	5-15-599	£13.56

Plasterboard Saw

With a rust-proof blade, this plasterboard saw is long-lasting and durable. The thick teeth are ideal for punching through plasterboard to get the job done quickly and efficiently

- Soft grip for ease of use
- 6tpi



Item	Description	Mfr Ref	Blade	Price
810801	Wallboard Saw	0-15-556	150mm	£5.31

Compass Saw

The Stanley Fatmax compass saw is ideal for making curved cuts in confined spaces

- 11tpi for a fine finish
- 3 sided precision ground teeth offer razor sharp cutting edges at every stage of the stroke
- Bi-material handle for improved grip, comfort and longevity



Item	Description	Mfr Ref	Price
824060	Compass Saw	2-17-205	£8.08

Coping Saw with 5 Blades

Coping saw with wood handle. Includes 5 assorted 170mm blades. Allows for 360 degree adjustment of blade for cutting at any angle

- Suitable for use on wood, plastics, laminates and fibreglass



Item	Description	Price
814743	Coping Saw (Wooden Handle)	£6.75

Fixed Blade Knife

FatMax fixed blade knife with ergonomic design, soft touch panels and grips. Includes a cartridge capable of holding 5 blades



- Ergonomic design for ease of use
- Blade clamp eliminates blade wobble, gives control
- Pop-up blade dispenser for easy access and fast changeover
- Cartridge holds up to 5 blades
- Supplied with FatMax blades
- Dual blade position in nose for versatility



Item	Description	Mfr Ref	Price
808376	Fixed Blade Knife	0-10-780	£10.18

Retractable Utility Knife

Top quality knife made from thick aluminium

- Strong aluminium body
- Length 150mm
- Includes heavy duty blade



Item	Description	Type	Price
995144	Utility Knife	Retractable	£1.99

Retractable Utility Knives



Stanley retractable and auto-retracting utility knives

- The 99E is the classic original Stanley knife
- It has a three-position retractable blade made of carbon alloy steel that can handle all types of professional and home improvement jobs
- The auto-retracting knife has a spring loaded blade which retracts automatically when pressure on the slide button is released for extra safety



817942



809312



811868

Item	Description	Type	Mfr Ref	Price
811868	Utility Knife	Retractable	0-10-088	£2.57
817942	Utility Knife	Retractable 99E	2-10-099	£6.17
809312	Utility Knife	Auto Retractable	0-10-189	£7.70

Utility Knife Blades

High quality utility knife blades, straight



Item	Description	UoM	Price
784751	Utility Knife Blades	Pk of 10	£1.49

Tools

Snap-off Blade Knife

Fully retractable, all purpose snap off knife with self lock

- Manufactured from durable plastic and fitted with a handy pocket clip
- The blade has 11 sharp snap off points



Item	Description	Width	Price
784773	Retractable Knife	9mm	£0.50

Chipping & Hacking Knife

Hacking knife with reinforced blade

- Suitable for a wide variety of applications
- Back of blade strong enough to be hit with a hammer in order to provide greater force



Item	Description	Price
993244	Chipping Knife	£9.51

Folding Pocket Knife

High quality folding pocket knife with curved blade

- Hi-Viz orange handle



Item	Description	Length of Blade	Price
992129	Pocket Knife	63mm	£11.73

Filling Knife



A wooden handled, one piece steel blade filling knife

- Flexible blade for easier application
- Great for silicone and putty filling



Item	Description	Width	Price
782655	Filling Knife	25mm	£8.93

Soft Grip Filling Knife



Soft grip filled knife by Draper, with a fully polished, flexible blade to produce a smooth finish on all fillers

- Hardened and tempered stainless steel blade for long life and corrosion resistance
- Soft grip handle for comfort and control
- Ideal for filling cracks/holes with a smooth finish



Item	Description	Handle	Width	Price
808360	Filling Knife	Soft Grip	50mm	£3.38

Tools



SERVICING, CALIBRATION & REPAIR



Our in-house team offer maintenance, repair and calibration of your test equipment and tools

Insulated Adjustable Wrenches

Drop-forged chrome plated adjustable wrenches with insulated handles

- Polished jaw face
- Smooth jaw adjustment



Item	Description	Size	Price
777627	Insulated Adjustable Wrench	up to 15mm	£33.80
795551	Insulated Adjustable Wrench	up to 33mm	£32.84

Insulated Spanners

High quality open ended insulated spanners

- Made of chrome vanadium steel



Item	Description	Size	Price
794949	Insulated Open Ended Spanner	6mm	£16.19
794950	Insulated Open Ended Spanner	7mm	£17.53
794951	Insulated Open Ended Spanner	8mm	£17.53
794952	Insulated Open Ended Spanner	10mm	£17.53
795534	Insulated Open Ended Spanner	13mm	£17.70
794954	Insulated Open Ended Spanner	17mm	£21.41
795535	Insulated Open Ended Spanner	19mm	£22.76

Adjustable Wrenches

Drop forged chrome vanadium steel adjustable wrenches

- Hardened and tempered
- DIN standard



Item	Description	Size	Mfr Ref	Length	Price
813578	Soft Grip Adjustable Wrench	up to 19mm	AW155	150mm	£4.23
813579	Soft Grip Adjustable Wrench	up to 22mm	AW205	200mm	£5.84
813580	Soft Grip Adjustable Wrench	up to 35mm	AW305	300mm	£9.75

Combination Spanner Sets



Fully polished chrome vanadium plated combination spanner sets

- Open jaw and ring jaw
- 8pcs 8-11,13,14,17,19mm
- 14pcs 8-17,19,21,22,24mm
- 26pcs 6-30 & 32mm



Item	Description	Size	Set	Mfr Ref	Price
813564	Combination Spanner Set	8mm-19mm	8 Piece	SC819	£11.05
813565	Combination Spanner Set	8mm-24mm	14 Piece	SC824	£26.10
813566	Combination Spanner Set	6mm-32mm	26 Piece	SC632	£48.71

Combination Spanners



Fully polished chrome vanadium plated combination spanners

- Open jaw and ring jaw



Item	Description	Size	Mfr Ref	Price
813542	Combination Spanner	6mm	SC006	£0.90
813543	Combination Spanner	7mm	SC007	£1.04
813544	Combination Spanner	8mm	SC008	£1.09
813545	Combination Spanner	9mm	SC009	£1.09
813546	Combination Spanner	10mm	SC010	£1.15
813550	Combination Spanner	11mm	SC011	£1.26
813551	Combination Spanner	12mm	SC012	£1.38
813552	Combination Spanner	13mm	SC013	£1.55
813553	Combination Spanner	14mm	SC014	£1.66
813554	Combination Spanner	15mm	SC015	£1.95
813555	Combination Spanner	16mm	SC016	£2.13
813556	Combination Spanner	17mm	SC017	£2.30
813557	Combination Spanner	18mm	SC018	£2.64
813558	Combination Spanner	19mm	SC019	£2.76
813559	Combination Spanner	20mm	SC020	£3.45
813560	Combination Spanner	21mm	SC021	£3.45
813561	Combination Spanner	22mm	SC022	£3.56
813562	Combination Spanner	23mm	SC023	£4.60
813563	Combination Spanner	24mm	SC024	£5.06

Cranked Combination Spanner



Dual ended combination spanner with cranked angle on the open end



Item	Description	Size	Price
100006	Cranked Combination Spanner	10mm	£4.15

Offset Reversible Ratchet Spanner

An offset reversible ratchet ideally suited for the installation of satellite dishes

- Drop forged heat treated steel
- Chrome vanadium steel



Item	Description	Type	Price
821663	Offset Ring Ratchet Wrench	10x13mm	£4.95

39 Piece Socket Set

Forged chrome vanadium steel 39 piece socket set



SEE ONLINE FOR CONTENTS



Item	Description	Size	Mfr Ref	Price
785168	Socket Set (Metric)	1/4" Drive	T4655	£69.62

Socket Set

Socket set with both 1/4" and 3/8" drive sockets. Blow-moulded carry case for easy transportation and storage. Supplied with ratchet handle and extension bar.

SEE ONLINE FOR CONTENTS



Item	Description	Set	Price
814290	Metric & Imperial Socket Set	40	£8.54

Ratchet Handles - Square Drive



Square drive socket ratchet handles

- 1/4", 3/8" and 1/2" options available
- Dynagrip bi-material handle for comfortable grip
- 72 Teeth
- Thin profile reversing level and low profile switch level prevent accidental movement and allows for single handed operation
- Button for easy release



Item	Description	Type	Price
794905	Ratchet Handle	1/4" Square Drive	£13.68
795614	Ratchet Handle	3/8" Square Drive	£15.29
794906	Ratchet Handle	1/2" Square Drive	£18.11

Ratchet Handles



Tait Tools square drive socket ratchet handles

- 1/2" and 1/4" square drive options available
- Ergonomic grip for added comfort
- 72 Teeth work in 5 degree increments
- Button for quick release



Item	Description	Type	Price
823805	Ratchet Handle	1/4" Square Drive	£7.15
823806	Ratchet Handle	1/2" Square Drive	£8.95

Socket Set Extension Bar

100mm 1/4" Square drive satin chrome plated extension bar

- Manufactured from chrome vanadium steel hardened, tempered and satin chrome plated for corrosion protection
- Hexagon ended and knurled for easy grip



Item	Description	Length	Price
794877	Socket Set Extension Bar	100mm	£0.95

Torque Wrench



Wera's click-torque wrench features a robust design with high accuracy as per DIN EN ISO 6789-1: 20017-07

- Easy setting and saving of default value
- Audible and tactile clicks on reaching the scale values
- Comes with 1/4" square drive, reversible ratchet and 45 teeth
- Range from 2.5Nm to 25Nm - ultra precise
- 824185 includes mini tool kit comprising of 12 bits, 6 sockets and adaptor



Item	Description	Mfr Ref	Price
824183	Torque A5 Wrench	75604	£125.13
824185	Torque A6 19pc Set	5130110001	£238.03

Combination Ratchet Tool Kits



Wera's combination tool set consists of a ratchet, bits, sockets and holder. Ideal for a multitude of screwdriving applications

SEE ONLINE FOR CONTENTS



Item	Description	Price
824182	39 pc Screwdriver, Ratchet, Socket Set	£66.20

Mini Spirit Level



ABS moulded level with two vials and 0-90° angle finder in body

- Accuracy 1.75mm per 1Mtr = 0.1° in standard position



Item	Description	Length	Price
789822	Mini Spirit Level	100mm	£2.99

Spirit Levels



Heavy duty body spirit levels with strengthened end caps for extra protection

- 2-3 durable vials
- Available in 250mm, 300mm and 600mm



Item	Description	Mfr Ref	Length	Price
823804	Spirit Level	SL250	250mm	£1.49
813621	Spirit Level	SL300	300mm	£3.57
813622	Spirit Level	SL600	600mm	£5.85

Tradesmans Spirit Levels

Spirit levels made from 1.8mm thick extruded aluminium with ribbed sides for strength and accuracy

- Vertical and horizontal vials, milled top and bottom faces



Item	Description	Length	Price
784890	Aluminium Spirit Level	900mm	£9.91
784891	Aluminium Spirit Level	1200mm	£11.49

Etched Steel Rule

Steel rule with hang hole

- Permanently etched graduations of cm/mm and inches



Item	Description	Length	Price
772600	Steel Rule	150mm	£1.08
802806	Steel Rule	300mm	£2.07

Engineers Set Squares

Engineers square with durable hardened steel blade. Precision ground for maximum accuracy



Item	Description	Material	Length	Price
807871	Engineers Square	Stainless Steel	150mm	£5.87
807872	Engineers Square	Stainless Steel	250mm	£13.44

Tape Measure

Tape measure with a powerlock locking mechanism for ease of use

- Die-cast metal case holds its own against rough handling
- Entire blade coated with heavy-duty Mylar polyester film for unbeatable durability
- Two-rivet, corrosion-resistant hook stands up to continuous use
- Special Tru-Zero hook does double-duty as a pivot for drawing circles and arcs



STANLEY

Tools

Item	Description	Type	Mfr Ref	Length	Price
820368	Tape Measure	Powerlock	0-33-443	10Mtr	£16.20

Tape Measures

Bi-material soft grip body tape measures

- Clear metric and imperial graduated blade
- Sturdy belt clip
- The blade is lockable in any position



TAIT TOOLS

Item	Description	Mfr Ref	Length	Price
815596	Tape Measure	TM103	3Mtr	£1.55
816177	Tape Measure	TM105	5Mtr	£2.62
816178	Tape Measure	TM108	8Mtr	£5.33

BEST SELLER

RJ45 Fast-Fit Compact Crimp Tool

An ergonomically designed compact crimp tool that's both easy and comfortable to use. Suitable for crimping the new Fast-Fit plugs. Features a locking mechanism that keeps the tool closed when not in use.

- Compact design
- Cuts and crimps at the same time
- Suitable for both shielded and unshielded Fast-Fit plugs



You Tube DEMONSTRATION VIDEO ONLINE

Item	Description	Price
821426	Ratchet Fast-Fit Crimp Tool	£28.68
821821	Replacement Blade	£2.69

Fast-Fit Cat5e RJ45 Plugs

The Fast-Fit RJ45 system is designed to make terminating RJ45 plugs simpler, faster and more repeatable. The one-piece plugs are suitable for stranded and solid wires and have 50µm gold plated contacts for enhanced performance and durability. Plugs are supplied in packs of 100 in environmentally conscious, reusable packaging

- Optimised performance due to reduced length of untwisted wires
- Faster termination times and reduced errors by checking wiring positions before crimping
- Suitable for stranded or unstranded wire
- 50µm gold plating
- Terminate using the Fast-Fit Compact Crimp Tool



The very best quality 50µm gold plating

COMMITTED TO REDUCING SINGLE-USE-PLASTIC Supplied in packaging with no single use plastics

Item	Description	Category	Shielding	UoM	Price
821409	Fast-Fit Plug	Cat5e	Unshielded	Pk Of 100	£30.06
821410	Fast-Fit Plug	Cat6	Unshielded	Pk Of 100	£31.75
821411	Fast-Fit Plug	Cat6	Shielded	Pk Of 100	£48.55
826591	Fast-Fit Plug	Cat6A	Shielded	Pk Of 100	£65.75

Fast-Fit Plug Boots

Plug boots for use with Ultima Fast-Fit plugs

- Slimline design for high density patching
- For use with Fast-Fit plugs
- Snagless latch design
- Clear plastic suitable for use with any coloured cable



COMMITTED TO REDUCING SINGLE-USE-PLASTIC Supplied in packaging with no single use plastics

Item	Description	Boot Style	Max. Cable OD	Pack Size	Price
826640	Plug Boot Cat5e/Cat6A	Snagless	6mm	100 Pcs	£19.73
821820	Plug Boot Cat6	Snagless	6mm	100 Pcs	£18.63

Modular Crimping Plier



A high quality ratcheting tool for cutting, stripping and crimping modular telephone plugs

- The steel frame gives long term durability and reliability
- Suitable for RJ45 (8P8C), RJ12 (6P6C), RJ11 (6P4C), RJ9 (4P4C) & 4P2C handset plugs



Item	Description	Mfr Ref	Price
785017	3 in 1 Ratchet Crimping Plier	CT200	£9.94

BT Modular Plug Crimping Tool

A full circle ratchet tool for terminating 4 and 6 way BT type plugs

- Suitable for 431A / 631A (BT Plugs) only
- Heavy duty metal pliers



Item	Description	Price
993832	BT Modular Plug Crimping Tool	£22.32

Jelly Crimp Plier 8B



Pliers specially designed for crimping jelly crimp contacts

- Made from special tool steel
- Drop forged, entirely hardened and tempered
- Cutting edges induction hardened
- Handles plastic dipped



Item	Description	Price
991030	Crimping Plier 8B	£10.34

Ratcheting Crimp Tool R/B/Y



Ratchet crimping tool for red, blue or yellow terminals

- For crimping 1.5mm, 2.5mm and 6mm terminals
- Soft grip, ergonomic handles



Item	Description	Mfr Ref	Price
823816	Ratchet Crimping Tool R/B/Y	TC056	£13.10

Non-Insulated Terminal Ratchet Crimp Tool



Crimp tool designed for safe and secure crimping of non-insulated terminals. They are heavy duty with a hardened steel jaw

- Auto-stop ratchet system
- Moulded handle for comfort and control
- Guaranteed for 30,000 crimps
- Cable sizes 1.5-10mm



Item	Description	Model	Price
812587	Ratchet Crimping Tool	430025	£44.76

Crimpstar Ratchet Crimp Tool



Designed for crimping electrical connections including bootlace ferrules (end sleeves)

- Treated steel crimp jaws with high mechanical properties
- Emergency release lever which, if necessary, opens the crimp jaws before their complete closure
- Ergonomically designed non-slip moulded plastic grips
- Cable Size 0.5-4mm



Item	Description	Mfr Ref	Price
806617	Mechanical Crimping Tool	HNKE 4	£103.19

Tools

HT51 Hydraulic Crimping Tool

This hydraulic compression tool develops a crimping force of 50kN with a built in safety valve and a pressure releasing system that can be operated at any stage of the compression. With spring loaded handles and a tool head that rotates through 180°, connectors can be positioned with one hand while the other advances the dies

- For use with copper cables up to 150mm
- Complete with carrying case
- Die sets are to be purchased separately



Item	Description	Mfr Ref	Price
793070	Handheld Hydraulic Crimping Tool	HT51	£730.00

HT51 Hex Die Sets

Item	Description	Size	Mfr Ref	Price
793071	HT51 Hex Die Set	16mm	ME3-50	£38.65
793072	HT51 Hex Die Set	25mm	ME5-50	£31.31
793076	HT51 Hex Die Set	35mm	ME7-50	£31.31
793464	HT51 Hex Die Set	50mm	ME10-50	£31.31
797031	HT51 Hex Die Set	70mm	ME14-50	£30.26
797032	HT51 Hex Die Set	95mm	ME19-50	£31.31
797033	HT51 Hex Die Set	120mm	ME24-50	£36.65



HT51 Hex Die Set



COMMSCOPE®



Draka

HellermannTyton



LANmark



Nexans

YOUR NUMBER ONE VENDOR NEUTRAL
STRUCTURED CABLING DISTRIBUTOR


COMTEC ▶
AN ETC GROUP COMPANY



COMMSCOPE®
NETCONNECT®



COMMSCOPE®
SYSTMIX®



SIEMON®

Inserter Wire 2A



Single wire insertion tool for LSA style IDC terminations

- Durable and reliable for regular use
- Includes blade to assist in removal of termination strips from backmount frames
- Includes hook for removal of wires from terminations
- Scissor action blades trim excess wire



Item	Description	Type	Price
773118	Inserter Wire 2A	LSA	£5.58

NETCONNECT Inserter Wire 2A

Enhanced punchdown tool for termination of all products with LSA-PLUS style IDC

- Can be used for all LSA-Plus series modules, jacks, patch panels and highband
- Sensor version ensures the conductor is fully inserted into the contact before allowing excess wire to be cut off



Item	Description	Price
772146	Inserter Wire 2A with Sensor	£28.06

Inserter Wire 8A

Impact and punchdown tool for seating wire into terminal block with cutter for excess wire

- Durable and reliable for regular use
- TPR soft-grip handle provides better comfort



Item	Description	Price
821184	Inserter Wire 8A	£29.95

Inserter Wire 9A Bix

A single forward movement will seat the wire into the BIX IDC clip and cut off the excess wire

- Terminates 22, 24 and 26-AWG plastic insulated solid copper conductors



Item	Description	Price
993343	Inserter Wire 9A Bix	£12.97

Inserter Wire 10A

Single point inserter with automatic wire cutting for 3M cabinet modules and jumpers

- Suitable for connecting wires to 3M MS2 modular cross connection systems



Item	Description	Price
802891	Inserter Wire 10A	£14.55

Tools

Inserter Wire 11A

Single point insertion tool when wire cut off is not required

- Designed for use with 3M MS2 modular cross connexion solution
- Does not cut wires after punch down



Item	Description	Price
789414	Inserter Wire 11A	£19.40

Pouyet/Krone Inserter Wire

Insertion tool for terminating into Pouyet and Krone style strips

- Scissor action wire cutting facility
- Wire extraction hook



Item	Description	Price
802893	Inserter Wire Pouyet/Krone	£19.58

Pouyet Inserter Wire

CORNING

Tools for insertion of wires in to Pouyet STG modules

- Tools have a scissor action wire cutting facility



Item	Description	Price
991891	Inserter Wire Pouyet	£52.34

SID Standard Inserter Wire

Insertion tool for Quante SID modules

- Wire extraction hook



Item	Description	Price
802892	Inserter Wire SID Quante	£21.17

Cosmic Quick Clip Inserter Wire

Multipurpose wire insertion tool ideal for wire insertion in Cosmic and Cosmic II distributing frames

- Capacity 22 or 24 AWG



Item	Description	Price
818029	Inserter Wire Cosmic Quick Clip	£141.33

Huawei Inserter Wire

Wire insertion tool inserts and crops wires simultaneously on Huawei IDC and has an integral hook and spudger

- Features a simple wrist lanyard for security during use



Item	Description	Mfr Ref	Price
823040	Huawei Inserter Wire	JPX-DXD2	£19.53

Inserter Wire QDF

Insertion tool for QDF Modules

- Ergonomic handle
- Integral hook and spudger



Item	Description	Price
816206	Inserter Wire QDF	£21.09

110 Inserter Wire

Punchdown tool for terminating wires on 110 IDC blocks

- Automatically trims excess wire
- Adjustable impact force setting
- Supplied with spare blade stored in tool handle



Item	Description	Price
770218	110 Inserter Wire	£22.34

Cable Stripper & Punch Down Tool

Stripper and punch down tool for inserting wires and stripping jackets



Item	Description	Price
791294	Cable Stripper 110 Punchdown Tool	£2.12

Dropwire Stripper

Non adjustable, two blade dropwire stripper for splitting dropwire 10 lengthways

- Exceptionally fast and completely safe



Item	Description	Type	Price
993296	Jacket Stripper	Dropwire	£12.26

Dropwire Sheath Stripper

The OPT dropwire sheath splitter performs the longitudinal sheath splitting process over the desired cable length to enable access to the internal cable components



- The sheath splitter design will allow end and mid-point cable access
- The sheath splitter is ergonomically designed to fit into the engineer's hand whilst providing adequate grip to draw the splitter along the cable sheath
- Designed for a minimum of 500 x 1 Mtr cuts



Item	Description	Mfr Ref	Price
820207	Dropcable Sheath Stripper	T0215	£66.19

Cyclops Sheath Cutter



Cyclops cutter for accurately cutting sheaths of unshielded and shielded cables. Once cut the sheath can be easily removed

- Self adjusting blade
- Capacity: 3mm - 11mm
- Suitable for twisted pair and coax cables



Item	Description	Price
823605	Cyclops Sheath Cutter	£8.24

Universal Cable Jacket Stripper

A universal stripper for flat or round cable



- Strips twisted pair, computer, power, speaker cables as well as bell wire and flat telecom cable
- Suitable for UTP/STP cable
- Diameters between 3.2 - 9mm



Item	Description	Mfr Ref	Price
774424	Universal Cable Jacket Stripper	CS100	£4.90

Cable Ringing Tool

Cable stripper for cables from 4-25mm in diameter

- Simple to use tool for removing PVC and rubber cable insulation
- End and mid-span stripping
- The spring-loaded cable retention arm holds the cable in place
- An integral chisel edge cuts through the insulation - the tool is then rotated around the cable to complete a cut around the circumference
- The cutting blade can be rotated through 90 degrees to cut along the cable
- Depth of cut is adjustable by up to 3mm



Item	Description	Price
815587	Cable Ringing Tool	£15.84

Cable Strippers

Allows all common round cables to be stripped accurately, quickly and safely. The cutting depth of the blade can be regulated infinitely which prevents damage to the inner conductor. The blade is self-rotating allowing conversion from circular to longitudinal stripping

- Available in sizes to suit cables 4mm through to 35mm
- Ergonomically shaped, non-slip handle
- In addition 880027 has a straight blade which can be covered with a protective cap and 880028 has a fully insulated, fibreglass reinforced plastic bracket



Item	Description	Cable Dia	No.	Price
993293	Jacket Stripper	4mm-16mm	7	£9.79
992132	Jacket Stripper	8mm-28mm	8	£14.49
880028	Jacket Stripper	28mm-35mm	9	£13.96
880027	Jacket Stripper with Straight Knife Blade	4mm-28mm	-	£18.80

Peg Style Jacket Strippers

Jacket strippers for use on a range of cable types including coaxial up to 8mm and standard UTP data cable

- Adjustable blades can be set for any depth for error-free stripping
- Strips circumferentially and longitudinally
- Supplied with three straight blades and one round blade



Item	Man. Code	Description	Cable Type	Cable Dia	Colour	Price
996364	45-162	Jacket Stripper Peg Style	RG174/RG187	Up to 3.2mm	Grey	£22.35
995524	45-163	Jacket Stripper Peg Style	RG58/Mini Coax	3.2mm-5.6mm	Blue	£22.35
807228	45-164	Jacket Stripper Peg Style	RG11/RG8	6.5mm-14mm	Blue	£30.55
998085	45-165	Jacket Stripper Peg Style	RG59/UTP Cable	4.8mm-8.0mm	Black	£22.35

Dual Drop Trimmer

Small combination body design dual drop trimmer that allows cable preparation of RG59, RG6, CT100 & CT65 coax cable (std, tri and quad) without any adjustment or blade cassette change out

- One-step cable preparation precisely exposes the centre conductor by 5/16" (7.93mm) and removes the proper length of jacket at 1/4" (6.35mm)
- Supplied with a unique polymer braid brush attachment for folding back the braid after cable preparation
- Built-in strip stop for precise preparation every time
- Lightweight, impact resistant High-Visibility yellow polymer construction
- DDT replacement cassettes are available separately
- Superior quality tool steel blade cassettes will perform 3500+ preparations under normal use



Item	Man. Code	Description	Type	Price
823394	38590	DDT Dual Drop Stripper	RG59/RG6/RG11	£17.38

Lightweight Drop Trimmer

Lightweight drop trimmer with compact body design that allows cable preparation of RG59, RG6 and N48 coax cable (standard, tri and quad)



- One step cable preparation precisely exposes the centre conductor by 5/16" (7.93mm) and removes proper length of jacket 1/4" (6.35mm)
- Supplied with unique polymer brush attachment for folding back the braid after cable preparation
- Built in strip stop for precise preparation every time
- Lightweight, impact resistant, highly visible yellow polymer construction
- Superior quality tool steel blade cassettes will perform 3500+ preparations under normal usage
- Blade cassettes are colour coded and marked with cable series type for easy identification



Item	Man. Code	Description	Type	Mfr Ref	Price
806656	38830	LDT Lightweight Drop Trimmer	RG59/RG6/N48	LDT 596-250	£11.55

Coax Stripper

Double bladed coax stripper cuts both inner and outer core simultaneously. Adjustable blade depth

- Suitable cable types - RG6/58/59/62



Item	Description	Price
784667	Rotary Coax Cable Stripper	£6.66

Longitudinal Jacket Stripper

Longitudinal jacket stripper for lengthways splitting of cable sheath or sub duct

- Also known as BT Cutter Longitudinal 1A
- One cutter for all plastic cable sheath diameters
- Cuts at any point in the cable
- Adjustable cutting depth control
- Easy knife replacement
- Maintenance-free
- Cable Diameter up to 25mm



Item	Description	Price
993292	Jacket Stripper Longitudinal	£47.55
990019	Replacement Blade	£14.29

Wire Stripper No. 5



An automatic wire stripper suitable for stripping cable diameters between 0.2-6mm. The wire stripper features a special scanning system which adjusts automatically to the diameter of the wire and ensures quick and accurate stripping without leaving marks on the insulation or damage to the conductor

- Quick-set stripping length stop is adjustable from 5-12mm and enables repeated stripping of a preset length
- Ergonomic design and light weight ensure fatigue-free operation
- Convenient clip holds the tool safely in the closed position when not in use



Item	Description	Price
825825	Automatic Wire Stripper	£17.75

Redline Wire Strippers

Drop forged chrome vanadium steel wire strippers

- Induction hardened and precision ground cutting edges
- Micro adjustment for damage free repeatable results
- Spring assisted opening for convenience
- Suitable for stripping cables 0.2-6mm
- Ergonomic dual component handles offering the perfect balance of grip and comfort



Item	Description	Mfr Ref	Price
796383	Automatic Wire Stripping Pliers	495001	£22.07

Hot Air Guns

Electric heat gun for use with heat shrinkable products

- For high volume applications
- Two heat settings, low (approx. 400°C) & high (approx. 600°C)
- Resettable thermostat protection



Item	Description	Output	Power	Price
795537	Hot Air Gun	Adjustable	2000W	£27.80

Heat Gun

Bosch heat gun with complete temperature and airflow control for demanding applications

- 10 airflow rates, digitally adjustable temperature settings, and 4 customizable programs for total tool control
- Incredibly strong 2300W motor to quickly reach 650°C
- Enhanced safety thanks to the thermal protection: Automatic shut-off of the heating element in case of motor overheating



Item	Man. Code	Description	Power	Voltage	Mfr Ref	Price
821571	06012A6360	Professional Heat Gun	2300W	110V	GHG 23-66	£132.14



WE'RE A **BOSCH** REPAIR CENTRE

If you need anything fixing,
contact us today.



Cordless SDS Plus Hammer Drills

Durable 3-function hammer drill with anti-vibration system, all-metal gearbox and LED work light for working in dark areas and tight corners. Supplied with heavy duty carry case and charger

- Hammer drill & chisel
- Single speed variable & reverse
- 1hr charger
- Anti-vibration system
- Mechanical safety clutch
- Lock-off switch
- LED work light
- Electric brake



Item	Description	Mfr Ref	Voltage	Battery	Price
799116	Rotary Hammer Drill (SDS Plus)	DCH253M2	18V XR Li-Ion	2x 4Ah Batteries	POA
823764	Rotary Hammer Drill (SDS Plus)	DCH273P2	18V XR Li-Ion	2x 5Ah Batteries	POA

Cordless Impact Driver

The DeWalt DCF887 boasts an improved brushless motor which gives increased torque as well as maintaining excellent power and efficiency in a range of light to heavy applications

- Fully brushless motor provides increased run time, more efficient power transfer and a hugely improved overall tool life
- Precision drive in speed 1 for precision applications and added control
- One-handed loading 1/4 in. hex chuck with easy grip sleeve
- 3-speed settings for optimized application versatility
- 3 LEDs with 20-second delay after trigger release, provide visibility without shadows



Item	Description	Mfr Ref	Voltage	Battery	Price
826731	Cordless Impact Driver	DCF887D2	18V XR Li-Ion	2 x 2.0Ah Battery	POA

Tools



FREE NEXT DAY DELIVERY

ON ORDERS OVER £200

Cordless Rotary Hammer with SDS plus GBH 18V-26 F Professional

18V Brushless SDS plus rotary hammer with quick-change chuck

- Kickback control and electronic precision control for better tool handling and increased user protection
- Variable and constant speed options
- Rotation control clutch



Item	Description	Mfr Ref	Voltage	Battery	Price
825867	SDS Hammer Drill	GBH18V-26F Professional	18v	2x 4Ah Battery	POA

Professional GSB 18 V-28 + GDX 18 V-180 Combi Drill, Twin Pack

Bosch combi drill twin pack GSB 18 VE-28 + GDX 18 V-180 18V with 2 x 4.0Ah CoolPack batteries and L-BOXX

- GSB 18 VE-28 Combi Drill
- GDX 18 V-180 Impact driver wrench
- 2 x 4.0Ah Li-Ion batteries



Item	Description	Mfr Ref	Voltage	Battery	Price
825848	Combi Drill Twin Pack	GSB 18v-28 + GDX 18V-180	18V	2x 4Ah Batteries + L-BOXX	POA

Cordless Drill/Driver GSR 12V-35 Professional 12V

Cordless drill/driver with a longer lifetime thanks to brushless motor with electronic motor protection

- Compact design enables optimum handling, especially when working overhead or in tight spaces
- Integrated LED light with afterglow function
- Professional quality 10mm Auto-Lock drill chuck



Item	Description	Mfr Ref	Voltage	Battery	Price
825846	Drill/Driver	GSR 12V-35 Professional	12V	2x 3Ah Battery	POA

Cordless Drill/Driver GSB 18V-55 Professional

Bosch's powerful entry-level 18 V impact drill with brushless motor

- Tough and powerful: performance of 55 Nm and 1,750 RPM for highest efficiency when working in wood, metal, and masonry
- Robust 13-mm Roehm metal chuck offers ideal power transfer for drilling and screwdriving
- Brushless motor ensures extensive tool lifetime and longer battery runtimes



Item	Description	Mfr Ref	Voltage	Battery	Price
825865	Combi Drill	GSB 18V-55 Professional	18V	2x 2Ah Batteries	POA

Batteries



Compact battery range

- Smart Li-Ion+ technology



800440

800434

800429

800430

Item	Description	Model	Voltage	Capacity	Price
800440	Battery	GBA O-B Professional	12V	2Ah	POA
800434	Battery	GBA M-C Professional	18V	4Ah	POA
800429	Battery	GBA H-B Professional	36V	2Ah	POA
800430	Battery	GBA H-C Professional	36V	6Ah	POA

SDS Chuck Adaptor Kits

Chuck adaptor for SDS drills

- Converts SDS to standard keyed chuck adaptor



Item	Description	Price
10069	Chuck Adaptor Kit	POA

SDS Chuck Adaptor Kits



Bosch chuck adaptor for SDS drills

- Converts SDS to standard keyed chuck adaptor



Item	Description	Price
801936	SDS Quick Change Adaptor	POA

Bosch GOP18V-28 Kit with 16 Accessories



A professional cordless multi-tool with an LED spot and Snap-in function for fast and easy tool accessory changes

- Features include Constant Speed, soft grip, and Speed Selection
- See online for accessory information



Item	Description	Mfr Ref	Voltage	Battery	Price
807396	Cordless Multi-Cutter	GOP-18V-28	18V	2x5.0Ah Li-Ion	POA

Cordless Angle Grinder GWS 18-125 V-LI Professional



Powerful 18-volt angle grinder

- Compact design and low weight (only 2.3 kg) for comfortable working
- Robust and durable 4-pole high-performance motor for a long lifetime



Item	Description	Mfr Ref	Voltage	Battery	Price
825866	Angle Grinder	GWS18 125V-LI	18V	2x 4Ah battery in L-BOXX	POA

D-tect 120 Professional Wall Scanner



Intuitive radar scanner for almost all materials

- Spot measurement provides accurate detection on narrow surfaces
- Centre finder offers visual guidance, to clearly identify the precise location of the object's centre
- Dual Power Source allows for use with a 12 V Li-ion battery or with standard alkaline batteries
- Maximum detection depth 120mm
- Detects water-filled plastic pipes, ferrous metals, non-ferrous metals, wooden studs, live cables



Item	Description	Price
825575	D-tect 120 Professional Wallscanner	POA

GMS 120 Professional Multi-Detector



A reliable multi-detector

- Maximum reliability - most objects are found and application errors are avoided due to the automatic calibration
- Reliable detection even of deep-lying objects up to a depth of 12cm
- Even more reliable detection of objects due to three-colour LED luminous ring
- Pinpoint indication of the objects centre with the Centre Finder scale, and display of material properties
- Better visibility of the result due to illuminated display
- Marking hole with LED luminous ring
- Three detection modes for various applications: Drywall mode, metal mode, live cable mode



Item	Description	Price
800587	GMS 120 Professional Multi-Detector	POA

FTTx Engineering Catalogue



THE PERFECT COMPLEMENT TO OUR
CONTRACTORS CATALOGUE

S300 Stud Detector

Stud and metal detector from Stanley

- Backlit LCD screen clearly displays all of the sensor's readings, even in low light conditions
- Wood and metal stud detection through up to 38mm deep surface material
- AC detection identifies live wires up to 51mm deep
- OnePassT centre-find technology locates stud centres



**STANLEY
FATMAX**

Item	Description	Price
792924	S300 Stud Detector	£36.80

Extreme Flat Wood Drill Bit Set

8 Drill bit set suitable for use with combi drills, drill drivers and impact drivers

- Extra thick and robust steel
- Easy and slip-proof clamping
- Fast and extended drilling life
- 8 different sizes



DEWALT

Item	Description	Mfr Ref	Price
808364	Titanium Extreme Flat Wood Drill Bit Set	DT7943B	£17.95

Tools

HSS Drill Bits Straight Shank Metric Jobber

HSS straight shank twist drill bits, high speed for general drilling

- Black oxide finish



Item	Diameter	Length	UoM	Price
784795	2.0mm	61mm	Pk of 10	£2.93
784808	2.5mm	61mm	Pk of 10	£3.26
783094	3.0mm	61mm	Pk of 10	£2.93
784823	3.5mm	61mm	Pk of 10	£2.80
783095	4.0mm	75mm	Pk of 10	£3.09
783096	4.5mm	80mm	Pk of 10	£3.66
783097	6.0mm	93mm	Pk of 10	£6.51

Item	Diameter	Length	UoM	Price
784882	6.5mm	93mm	Pk of 10	£6.46
783098	7.0mm	109mm	Pk of 10	£7.32
784886	8.0mm	109mm	Pk of 10	£9.78
784899	8.5mm	109mm	Pk of 5	£10.63
783100	10.0mm	133mm	Pk of 5	£14.17
784907	12.0mm	133mm	Pk of 5	£11.77
994441	13.0mm	133mm	Pk of 5	£13.35

Metric Jobber HSS Drill Bit Sets

High speed steel drill bit set for metal, plastic and wood

- Sets contain all sizes in 0.5mm increments held within a durable plastic case



Item	Description	Set	Diameter	Price
785276	HSS Drill Bit Set	13 Piece	2.0mm-8.0mm	£5.17
796297	HSS Drill Bit Set	19 Piece	1.0-10.0mm	£12.34

HSS Cone Cutter

Step drill for cutting varying hole sizes in material up to 4 mm thick without changing the drill bit

- 6-30mm in 2mm increments



Item	Description	Head Size	Price
813055	HSS Step Drill	6mm-30mm	£35.05

Tools



**ORDER
BEFORE 6PM
FOR NEXT DAY
DELIVERY***

*MONDAY - FRIDAY

SDS Plus Masonry Drill Bits

SDS plus drill bits to drill into hard surfaces such as brick and concrete with minimal effort

- Ideal for drilling into brick and concrete
- Rigorously tested for quality and compliance
- Large selection of sizes and lengths available

OTHER SIZES AVAILABLE ONLINE



4-cutter

Item	Style	Diameter	Length	Price
823784	SDS Plus	5mm	110mm	£1.67
823785	SDS Plus	5.5mm	110mm	£1.82
823786	SDS Plus	6mm	110mm	£1.82
823787	SDS Plus	6.5mm	110mm	£1.88
823788	SDS Plus	7mm	110mm	£2.48
823789	SDS Plus	8mm	110mm	£2.48
823790	SDS Plus	8mm	260mm	£3.54
823791	SDS Plus	8mm	460mm	£6.02
825893	SDS Plus	10mm	260mm	£3.42
823792	SDS Plus	10mm	460mm	£6.02

Item	Style	Diameter	Length	Price
823793	SDS Plus	10mm	600mm	£7.45
823794	SDS Plus	10mm	1000mm	£10.09
825894	SDS Plus	12mm	260mm	£5.95
823795	SDS Plus	12mm	460mm	£8.05
823796	SDS Plus	16mm	200mm	£8.58
823797	SDS Plus	16mm	460mm	£12.11
823798	SDS Plus	18mm	460mm	£15.53
825897	SDS Plus	20mm	460mm	£19.52
825896	SDS Plus	20mm	600mm	£22.87
823799	SDS Plus	22mm	460mm	£23.37

SDS-Plus Masonry Drill Bit Sets

5 & 15 piece SDS masonry drill & steel set

- 5 Piece contains; 5, 6 x 110mm and 7, 8, 10 x 160mm supplied in a blister pack
- 15 Piece contains the following supplied in a plastic case
- 110mm drill bits; 5.5, & 6mm
- 160mm drill bits; 5.5, 6, 6.5, 7, 8, & 10mm
- 260mm drill bits; 10, 12, & 16mm
- Chisels: 1 x wide, 1 x point, 1 x flat, 1 x groove



Item	Description	Set	Price
799114	Masonry Drill Bit Set	5	£5.70
785383	Masonry Drill Bit Set	15	£22.26

Masonry Drill Bits

Masonry drill bits, milled and sandblasted, with industrial grade carbide tip

- For use with rotary or percussion drills
- Milled slow spiral for quick and effective debris removal
- Straight Shank



Item	Description	Diameter	Length	Price
990117	Masonry Drill Bit	5.5mm	150mm	£1.05
990118	Masonry Drill Bit	6mm	150mm	£1.10
771293	Masonry Drill Bit	7mm	100mm	£1.07

SDS-Plus Masonry Drill Bit Set

3 Piece SDS masonry drill bit set

- Diameter 12/16/24mm
- Length 1000mm



Item	Description	Price
785382	Masonry Drill Bit Set	£24.96

Tools

Holesaw Kit

Variable pitch holesaws in bi-metal construction

- Hardened HSS teeth, flexible high carbon steel backing
- For cast steel, malleable cast iron, stainless and structural steel, alloyed and non-alloyed aluminium, bronze, copper, PVC, acrylic and wood
- Set contains 18, 20, 25, 32, 40 and 51 mm holesaws
- Includes 2 arbors and mandrel adaptor



Item	Description	Price
784728	Electricians Bi-Metal Holesaw Kit	£26.47

BESPOKE TOOL KITS AVAILABLE
CALL YOUR ACCOUNT MANAGER FOR DETAILS

Holesaws

Professional quality HSS bi-metal holesaw with hardened vari-pitch teeth for fast clean cutting of holes in steel, stainless steel, die cast metals, nail embedded wood, hardwood floors, plywood, plastics etc. Arbor purchased separately



Arbor Types to use with Holesaws (See Pg 115)

Diameter	Arbor
14-30mm with HSS Drill	784604 (8mm hex shank) or 784611 (11mm hex shank)
32-152mm with HSS Drill	784617 (11mm hex shank)
14-30mm with SDS Drill	784622
32-152mm with SDS Drill	784624



Item	Description	Diameter	Price
784596	Bi-Metal Holesaw	16mm	£6.27
784601	Bi-Metal Holesaw	19mm	£6.34
784657	Bi-Metal Holesaw	20mm	£6.43
784597	Bi-Metal Holesaw	22mm	£6.85
784598	Bi-Metal Holesaw	25mm	£8.07
784600	Bi-Metal Holesaw	29mm	£8.93
784603	Bi-Metal Holesaw	32mm	£9.67
784612	Bi-Metal Holesaw	38mm	£10.48
784605	Bi-Metal Holesaw	40mm	£10.77
784606	Bi-Metal Holesaw	41mm	£10.96
784607	Bi-Metal Holesaw	43mm	£11.28
784609	Bi-Metal Holesaw	48mm	£11.87
784610	Bi-Metal Holesaw	51mm	£11.67
788473	Bi-Metal Holesaw	54mm	£12.54
788475	Bi-Metal Holesaw	57mm	£12.93
788476	Bi-Metal Holesaw	60mm	£13.32

Item	Description	Diameter	Price
784613	Bi-Metal Holesaw	64mm	£13.36
784614	Bi-Metal Holesaw	65mm	£13.40
784615	Bi-Metal Holesaw	67mm	£13.52
784619	Bi-Metal Holesaw	70mm	£13.94
788477	Bi-Metal Holesaw	73mm	£14.18
784620	Bi-Metal Holesaw	76mm	£14.54
784621	Bi-Metal Holesaw	79mm	£14.57
784623	Bi-Metal Holesaw	83mm	£15.09
784625	Bi-Metal Holesaw	86mm	£16.15
784626	Bi-Metal Holesaw	89mm	£16.69
784627	Bi-Metal Holesaw	92mm	£18.41
784628	Bi-Metal Holesaw	95mm	£18.65
784629	Bi-Metal Holesaw	102mm	£20.36
784630	Bi-Metal Holesaw	105mm	£22.33
784632	Bi-Metal Holesaw	111mm	£26.64
784635	Bi-Metal Holesaw	114mm	£28.05

Holesaw Arbor

Holesaw arbor for use with CK holesaws



- Complete with shaft locking grub screw
- For use with holesaws up to 30mm
- 8mm or 11 mm hexagonal drive shaft
- Supplied with replaceable 1/4" HSS pilot drill
- Use for 14-30mm Holesaws



Item	Description	Price
784604	Holesaw Arbor	£8.93
784611	Holesaw Arbor	£9.40

Holesaw Arbor Quick Release

Quick-release holesaw arbor for use with CK holesaws



- Fixing pins are spring loaded for easy withdrawal making holesaw changes fast and efficient
- 11 mm hexagonal drive shaft
- Supplied with replaceable 1/4" HSS pilot drill
- Use for 32-152mm Holesaws



Item	Description	Price
784616	Holesaw Arbor (Quick Release)	£14.96

Holesaw Arbor Heavy Duty

Heavy duty holesaw arbor for use with CK holesaws from 32-114mm



- Fixing pins are locked in place with a screw down collar securing the holesaw for heavy duty use
- 11 mm hexagonal drive shaft
- Supplied with replaceable 1/4" HSS pilot drill
- Use for 32-152mm Holesaws



Item	Description	Price
784617	Holesaw Arbor Heavy Duty	£16.66

Pilot Drill

Replacement HSS pilot drill bits for CK holesaw arbors



- Suitable for 784604, 784622, & 784624



Item	Description	Price
784652	Replacement Pilot Drill for 11 mm Hex	£5.31

Holesaw Arbor SDS Plus Shank

Heavy duty holesaw arbor with SDS Plus drive shaft, designed for use with CK holesaws



- 14-30mm or 32-152mm options
- 11 mm hexagonal drive shaft
- Supplied with replaceable high speed steel pilot drill



Item	Description	Price
784622	Holesaw Arbor SDS Plus Shank	£10.58
784624	Holesaw Arbor SDS Plus Shank	£15.47

Holesaw Arbor Extension

300mm Extension bar for all CK 11 mm hexagonal shaft arbors



- Complete with shaft locking grub screw



Item	Description	Price
784753	11 mm Holesaw Arbor Extension	£8.93

Tools

Knipex Ergostrip

For fast and precise stripping

- Conical, slimmed down tool ends for better access in confined areas
- Stripping device for cross-sections 0.2 / 0.3 / 0.8 / 1.5 / 2.5 / 4 mm²
- Simplified insertion of single wires for stripping using location ridges
- Opening spring and locking device
- Easy insertion of coax and data cable



You Tube VIDEO ONLINE

Item	Description	Price
832643	ErgoStrip Universal Stripping Tool	£33.79

KNIPEX BiX Cutters

Cuts plastic pipes and sealing sleeves without

- Cuts pipes quickly, cleanly and without shavings
- Rotatable knife block for cutting plastic pipes (blade in the middle) and sealing sleeves (blade outside)
- With locking mechanism for safe transport
- Two spare blades integrated in the tool
- Made of stable, reinforced plastic, die-cast zinc blade unit
- Blades made of special surgical stainless steel



You Tube VIDEO ONLINE

Item	Description	Price
832650	BiX Cutter	£23.65



NEED ASSISTANCE?

01480 415414 (Head Office)

0141 564 1234 (Glasgow)

Site Equipment

- 118 - 122 Ladders & Ladder Accessories
- 123 - 127 Roadside Safety
- 128 - 129 Tents & Umbrellas
 - 130 Stools
 - 130 Protective Sheeting & Spill Kits
 - 131 Power Generators
 - 131 110V Ventilator
 - 132 Water Pumps
 - 133 Transformers & Accessories
 - 134 Batteries
- 135 - 137 Spades & Excavation Tools
- 137 - 138 Crowbars
 - 138 Distance Measuring Wheels
 - 138 Inspection Camera
 - 139 Hydraulic Breakers & Accessories
 - 140 Compaction plates & Trench Rammers
 - 141 Stihl Petrol Saw and Cutting Discs
 - 142 Tarmac and Concrete Reinstatement
 - 143 Crayon Markers and Paints
 - 144 Containers
 - 145 Trowels
- 145 - 146 Brooms, Dust Pans & Brushes
 - 146 Protective Sheeting & Spill Kits
- 146 - 147 Trolleys, Trucks & Tables
- 148 Workbenches
- 149 Vacuum Cleaners
- 150 - 152 Vehicle Essentials
- 153 - 154 First Aid & HSE Documentation
 - 154 Fire Extinguishers & Blanket
 - 157 Cleaning Wipes, Sanitisers & Barrier Creams
- 158 - 159 Hand Torches & Lamps
- 160 Twin Mobile Radios
- 161 - 163 Working at Height/Fall Arrest
- 164 - 174 Workwear & PPE

Site
Equipment



117

Site Equipment

Ladder 5B, BT Style Aluminium Triple Box Section Extension Ladder



Class 1, three section aluminium ladder for pole work

- Double safety catch and lashing rope
- Nylon rollers
- Butterfly top rung
- Extended Height 6Mtr
- Closed Height 2.5Mtr
- Weight 18.5Kg



Item	Description	Price
993131	Ladder 5B	POA

Ladder 7A, BT Style Fibreglass Triple Box Section Extension Ladder



Class 1, three section fibreglass ladder for pole work in environments where electrical hazards exist

- Double safety catch and lashing rope
- Nylon rollers
- Butterfly top rung
- Extended Height 6Mtr
- Closed Height 2.5Mtr
- Weight 23Kg



Item	Description	Price
782016	Ladder 7A	POA

Site Equipment

3 Section Aluminium Extension Ladder



Three section push-up general duty extension ladder

- Certified to EN131
- Three section push-up extension ladder
- Fitted with D-shaped rung and solid moulded rubber feet at both ends
- Easy to handle yet incredibly rigid
- Closed height 2.46m, extended height 5.23m
- Weight 18.5kg



Item	Description	Price
824057	3 Section Extension Ladder	£189.15

Rubber Feet For BT Style Ladders

Replacement rubber feet For BT style ladders



Item	Description	UoM	Price
789708	Replacement Feet For Ladder 5B	Pair	£7.76
801457	Replacement Feet For Ladder 7A	Pair	£7.76

BESPOKE VAN KITS AVAILABLE



Tailored to your exact requirements
Contact us for details

Fibreglass Swingback Ladder

Fibreglass swingback step ladders

- Load capacity 150Kg
- British Standard EN131
- Non-conductive fibreglass stiles perfect for working near electricity



Item	Description	No. of Treads	Weight	Open Height	Price
782024	Step Ladder	6 Tread	5.5Kg	1.22Mtr	£113.44
782025	Step Ladder	7 Tread	6.5Kg	1.44Mr	£122.45
782026	Step Ladder	8 Tread	7.5Kg	1.7Mtr	£134.13

716 Series Fibreglass Step Ladders - Swingback

The 716 series swingback fibreglass stepladder has a multi-functional holster top to keep tools organised and safe on the ladder

- Load capacity 150Kg
- British Standard EN131
- Non-conductive fibreglass stiles perfect for working near electricity
- A generous 300mm treads pitch gives excellent reach heights
- Slip resistant treads
- Semi tubular rivets throughout provides rigid fixings
- New design internal "H-spreaders" offer single handed operation also adds strength and stability of the ladder
- Edge bracing provides enhanced strength and increased protection against damage



Item	Description	No. of Treads	Series	Weight	Open Height	Price
797061	Step Ladder	5 Tread	716 Series	7.5Kg	1.4Mtr	£102.44
797062	Step Ladder	6 Tread	716 Series	8.54Kg	1.67Mtr	£107.67
797063	Step Ladder	8 Tread	716 Series	11.21Kg	2.23Mtr	£140.75

Telescopic Combi Ladders

Telesteps combi ladders join the best features from the Telesteps telescopic ladders and stepladders into one single ladder for all your tasks during the day

- Use it free-standing or put it against a wall
- Pull the ladder out to its full length
- Then just unfold both halves of the ladder and start work
- EN131 approved and comply with European safety standards
- Tread depth 90mm



SAFETY FEET 797106 AVAILABLE ONLINE

Item	Description	Mfr Ref	Weight	Extension Height	Closed Height	Price
809139	Telesteps Telescopic Combi Ladder	60623	14.5Kg	2.3Mtr	0.71 Mtr	£305.80
790672	Telesteps Telescopic Combi Ladder	60630	19.8Kg	3Mtr	0.79Mtr	£372.90

Aluminium Telescopic Ladder

The X-Tenso aluminum telescopic ladder is ultra-compact. Its sliding system with Teflon rings prevents clogging and guarantees stability

- Simple and Practical
- Adjustable up to 5.30m access height
- 38mm wide rungs
- Easy storage and transport
- Green installation indicator
- Ultra light
- Teflon slip rings, safe and durable
- Complies with standard EN 131-6
- Slowdown system when unlocking
- Folding stabiliser base with reinforced shoes
- Working Height: 5.3m
- Deployed Height: 3.2m
- Folded Dimensions: 845x511 mm
- Weight: 10.1kg
- Max Load: 150kg



Item	Description	Type	UoM	Price
832893	Telescopic Ladder	With Stabilisers	Single	£236.00

Aluminium Telescopic Ladder

Aluminium telescopic ladders ideal for surveyors, tradesmen and DIY use. These high quality ladders are light to carry, compact to store, easy to transport and will easily fit into the boot of a car

- Smooth operation, extends and locks rung by rung
- Anti-pinch finger protectors
- Indicators to show when each rung is locked
- Manufactured to BS EN131 standards
- Anti-pinch system which protects hands when collapsing the ladder



Item	Description	No. of Treads	Weight	Extension Height	Closed Height	Price
818971	Ladder Telescopic	9 Tread	6.8Kg	2.6Mtr	0.8Mtr	£88.11

Aluminium Ladder Platforms

Convenient hop-up for general low level work

- Certified to EN14183:2003.
- Non-slip platform
- Locking hinges



Item	Description	Type	Weight	Height	Width	Length	Price
820167	Ladder Platform	2 Step	5.5Kg	800mm	445mm	900mm	£63.85
820168	Ladder Platform	Square	6.5Kg	500mm	710mm	620mm	£72.20

Telecoms Leaning Ladder & Pole Kit

The Tetra Openreach leaning ladder & pole kit

- 1x Cow's tail including small twist lock karabiners and large scaffold karabiner
- 2x 12mm Diameter reusable ladder tie bolt
- 2x 6Mtr ladder strap with cam buckle & karabiners
- 1x Hi-Vis ladder yoke
- 1x Rope grab including twist lock karabiner
- 1x 10Mtr x 11mm Diameter static kernmantle rope including aluminium scaffold karabiner
- 1x Day glow tape sling complete with 7 sewn loops for securing ladders to pole
- 1x Storage bag medium
- 1x 12.5mm SDS Plus masonry drill bit



Item	Description	Price
829455	Leaning Ladder & Pole Kit	£317.68

Telecoms Second Ladder Kit

The Tetra Openreach telecoms second ladder kit consists of:

- 1x Day glow tape sling complete with 7 sewn loops for securing ladders to pole
- 1x 10Mtr x 11mm Dia static kernmantle rope including aluminium scaffold karabiner
- 2x 6Mtr Ladder strap with cam buckle & karabiners
- 1x Hi-Vis ladder yoke
- 1x Storage bag medium



Item	Description	Price
829456	Second Ladder Kit	£185.00

Telecoms Flat Roof Kit

The Tetra Openreach telecoms flat roof kit consists of:

- 1x 20mm Reuseable eyebolt for flat roof use
- 1x 20mm SDS Plus masonry drill bit
- 1x 3Mtr Kernmantle rope and karabiner for flat roof use



Item	Description	Price
829457	Flat Roof Kit	£64.75

Anti Slip Ladder Leveller

Laddermat anti-slip ladder leveller is made from heavy-duty rubber matting with nodules and is fully adjustable

- Prevents accidents and reduces risk of injury
- Adjustable for use on sloping and uneven ground
- Prevents feet from sinking in to soft ground



Item	Description	Width	Length	UoM	Price
824123	Ladder Leveller	24cm	17cm	Pair	£14.93

LadderM8rix Professional

A ladder stability/anti-slip device with rubber anti-slip top where the ladder feet are placed and a metal spiked base to help grip on surfaces

- To be used outside only
- Can be used on many exterior surfaces
- Includes carry case
- L: 575 mm W: 380 mm D: 55 mm




Item	Description	Price
833173	LadderM8rix Professional	POA

Ladder Stop

Tee pieces for securing ladder feet

- Helps prevent ladders from slipping
- Rugged, durable construction



Item	Description	Width	Price
773424	Ladder Stop	450mm	£52.60
825691	Ladder Stop	600mm	£78.74

Ladder Stay

Ladder stay / stand off

- Easy to fit
- Industrial build
- Can be used with all ladders
- Detachable from ladder



Item	Description	Price
200118	Ladder Stay / Stand Off	£29.76

Site Equipment

Ultimate Ladder Standoff

A versatile ladder stand off designed using square wheels to roll freely up the wall and then re-shape when weight is applied turning the wheel into a non-slip rubber pad which grips the wall or roof and prevents the top of the ladder from sliding in any direction.



Item	Description	Price
825824	Ultimate Ladder Standoff	£89.00

Ladder Clamps (Pair)

Ladder clamps for locking ladders to roof racks etc

- Supplied as a pair
- Steel construction
- Includes 2 padlocks



Item	Description	Price
993590	Ladder Roof Rack Clamp Set	£20.37

Ladder Tie

BT style ladder accessory

- Used to lash ladders extension 5B and 7A when working on poles



Item	Description	Price
200119	Ladder Tie	£3.60

Laddertag

Ladder tags and inserts for recording safety inspections



Item	Description	Mfr Ref	UoM	Price
797982	Ladder Tags & Inserts	EITH/L12	Box 10	£53.84
797985	Laddertag Inserts	EITL12	Each	£2.50



**MORE PRODUCTS AND
SPECIAL OFFERS ONLINE**

www.comtecdirect.co.uk

Pedestrian Barriers (Metal)

Metal barrier gates available in three and four gate options

- Designed to be used around manhole repairs, cable laying and other temporary excavations
- 3 and 4 gate barriers are supplied with barrier clips included



Item	Description	Type	Price
992172	Panel Barrier System	3 Gate	£59.91
992165	Panel Barrier System	4 Gate	£81.18

Portagate Pedestrian Barrier System



The Portagate is a blown moulded high density polyethylene barrier

- Lightweight and compact
- Adjoining clips allow multi-positioning configurations
- Firm hold hinge clip down system locking panels securely
- Temporary signage recesses included for toggle mount courtesy signs



Item	Description	Type	Price
816081	Portagate Barrier System	3 Gate	£64.95
819345	Portagate Barrier System	4 Gate	£86.99

Utility Pedestrian Barrier System

Utility barrier system with a unique and protected D-Hinge system for incredible stability

- Manufactured from 100% recyclable material
- Higher reflective area to meet various legislations
- Deep channels to prevent collection of rainwater
- Product stacks with itself in every orientation



Item	Description	Type	Price
805030	Panel Utility Barrier System	3 Gate	£68.86
810583	Panel Utility Barrier System	4 Gate	£69.80

SafeGate Pedestrian Barriers



SafeGate is a folding barrier system designed to be used around manhole repairs, cable laying and other temporary excavations

- 100% recyclable
- Modular design can be assembled as per required configuration
- Integral locking clamp to aid stability when the barriers are deployed in a straight line



Item	Description	Type	Price
790049	SafeGate Panel Barrier System	3 Gate	£73.76
793435	SafeGate Panel Barrier System	4 Gate	£84.54

Gate Barrier



Chapter 8 blow moulded barrier

- Incredible strength and durability
- Free standing with 360 swivel feet
- Free from screws and rivets



Item	Description	Inc.	Length	Price
815650	Gate Barrier	Anti-Trip Feet	2Mtr	£46.70

SafeBase Weighted Gate

Add the SafeBase to your SafeGate (or similar) barrier system for total stability

- Made from recycled PVC
- 338mm x 338mm x 90mm
- 2.64kg



Item	Description	UoM	Price
834022	SafeBase Weighted Gate	Each	£6.11

Site Equipment

LowPro 100 Micro Trench Covers

Narrow trench cover developed for Project Gigabit

- Designed for fibre-optic cable installations & maintenance
- Suitable for Narrow-Trenching: 75mm-100mm excavations
- 1m sections can securely bolt together with nyloc fixings
- Low profile: lies flat on the ground when installed
- Bends around corners
- Suitable for pedestrian traffic and vehicle
- Hivis inserts for safety day and night



Item	Description	Depth	Length	Length	Price
834362	LowPro 100 Narrow Trench cover	20mm	1065mm	250mm	£18.86
834364	LowPro 100 Narrow Trench cover	40mm	1065mm	250mm	£20.27

Low Pro Trench Cover

Pedestrian board with patented flexi-edge technology, suitable for 700mm trenches

- Complies with National Grid footway board specification T/SP/E/42
- Pedestrian and driveway board
- Central section made of glass reinforced composite
- Shock resistant, patented Flexi-Edge technology
- Anti-slide, non-pinned and self-weighted
- Robust and long-lasting



Item	Description	Width	Length	Price
814245	LowPro Trench Cover	1.125Mtr	1.125Mtr	£117.98

SafeKerb Wheelchair Access Ramp

The SafeKerb ramp provides safe access for wheelchair, pushchair, motorised wheelchair, bicycle and foot traffic up to 250Kg. Commonly used to provide access from kerb to road when the pavement is closed for street works

- Adapts to varying kerb or step heights (60mm to 160mm)
- Anti-slip and hi-vis surface
- Must be bolted for maximum stability and security
- Suitable for wheelchairs, pushchairs, motorised buggies, bicycles and foot traffic up to 250kg
- Compact stacking for easy handling
- Made from high-density polyethylene (HDPE)
- 100% Recyclable
- Designed and manufactured in the UK



Item	Description	Price
795619	Wheelchair Access Ramps	£65.05

Footway Boards & Trench Covers



The tuff trench is the first pedestrian trench cover to be moulded from High Density Polyethylene which means it won't splinter or shatter when dropped

- Can withstand over 400Kg loads
- Strong durable with high impact resistance
- Anti-slip pattern conforms to slip resistance of BS 7976: Part 2
- Single man lift with handles for easy lifting, only 8Kg
- Conforms to National Grid T/SP/E/42
- Conforms to HAUC advice note No. 2018/01



Item	Description	Height	Width	Length	Price
810649	Pedestrian Trench Cover	40mm	800mm	1200mm	£65.71

External Heavy Duty Cabling Protector

Heavy duty cable protector - tested for use with axle loads up to 6000kg

- Instant cable protection for contracts work & outside events
- Heavy duty rubber mouldings interlink to form continuous ramped cable protection
- Hinged lid allows cables to be inserted after ramps are in position
- Robust design withstands passage of heavy goods traffic
- Linked sections normally require no ground fixings
- Bolt holes provided for more permanent installations
- Supplied in 980 x 600mm sections
- Overall dimensions 75H x 600W x 1000Lmm
- 3 x cable channels 55H x 65Wmm
- Unit weight 27.6kg



Item	Description	Channel	Width	Length	Price
809517	External Heavy Duty Cable Protector	3 Channel	600mm	1000mm	£102.93

Site Equipment

Triflex Road Signs

Extremely compact system, brings significant benefits regarding vehicle capacity and payload

- Unparalleled stability - designed to flex in strong gusts
- Two-piece product
- Very quick and easy to erect with no fiddly fixings
- Small footprint makes the TriFlex ideal for works in urban areas
- Corrosion-proof metalwork, GRP spine and ribs with reinforced flexible PVC



Item	Description	Type	Height	Price
821890	TriFlex Road Sign	8 Piece Chapter 8 Kit	750mm	£895.00

Road Cones

PVC road cones in 2 commonly used sizes

- 100% recycled sturdy one-piece cone complete with Sealbrite reflective sleeve



Item	Description	Height	Price
992338	Road Cone	450mm	£3.62
790721	Road Cone	750mm	£6.31

Road Cone Mounted Signs

Selection of signs for mounting to 750mm road cones

- Chapter 8 cone mounted signs
- Class 1 reflective on black environmentally friendly recycled HDPE
- Triangular signs 750mm x 750mm x 750mm
- Pedestrians left/right sign 600mm x 450mm
- Chapter 8 kit contains 4 road works, 2 END supplementaries, 1 left & 1 right directional arrow, 1 left & 1 right road narrows



Item	Description	Type	Shape	Height	Width	Price
812766	Cone Mounted Sign	8 Piece Chapter 8 Kit	-	750mm	-	£126.95
788092	Cone Mounted Sign	Keep Left	Circle	750mm	-	£17.85
994149	Cone Mounted Sign	Keep Right	Circle	750mm	-	£17.85
805868	Cone Mounted Sign	Pedestrians Left	Rectangular	450mm	600mm	£10.66
790709	Cone Mounted Sign	Pedestrians Right	Rectangular	450mm	600mm	£10.66
790708	Cone Mounted Sign	Pedestrians Left/Right (Movable Arrow)	Rectangular	450mm	600mm	£12.95
790710	Cone Mounted Sign	Road Narrows Left	Triangular	750mm	-	£14.95
790711	Cone Mounted Sign	Road Narrows Right	Triangular	750mm	-	£14.95
790707	Cone Mounted Sign	Men At Work	Triangular	750mm	-	£14.95
800062	Cone Mounted Sign	Footway Closed	Rectangular	450mm	600mm	£10.66

Road Sign Mounting Stand

Tripod style road mounting stand

- Folding extendable three-legged sign stand
- Accepts various sizes of flexible sign panels
- Ideal for uneven ground



Item	Description	Price
809620	Tripod Road Sign Stand	£27.75

5kg Filled Sandbag

Pre-filled sand bags perfect for reducing ingress in the event of flooding



Item	Description	Price
813079	Sandbag 5kg	£9.25

Stand Mounted Road Signs

Flexible road signs with Class 1 reflective panel

- For use with tripod style road sign stand (809620)
- Fully compliant with Chapter 8 requirements
- Road narrows sign supplied with pop on panel enabling user to convert to left or right



Item	Description	Type	Shape	Height	Width	Price
809623	Roll Up Sign	Keep Left/Right	Square	750mm	-	£20.75
819818	Roll Up Sign	Pedestrians Left/Right Arrow	Rectangular	450mm	600mm	£12.23
200176	Roll Up Sign	Road Narrows Left/Right	Triangular	750mm	-	£14.93
809621	Roll Up Sign	Men At Work	Triangular	750mm	-	£12.82
797429	Roll Up Sign	Footpath Closed	Rectangular	450mm	600mm	£20.81
797430	Roll Up Sign	Footpath Closed Ahead	Rectangular	450mm	600mm	£9.81
809628	Roll Up Sign	Pedestrians Use Other Footway	Rectangular	450mm	600mm	£9.81
809632	Roll Up Sign	Single File Traffic Supplementary Plate	Rectangular	-	-	£11.61
817014	Roll Up Sign	End Supplementary Plate	Rectangular	-	-	£11.61

Site
Equipment



BESPOKE VAN KITS AVAILABLE

Tailored to your exact requirements
Contact us for details



Site Equipment

G.fast Cabinet Jointers Tent

An Openreach approved jointers tent designed specifically by Comtec for use with G.fast street cabinets. A wider version of the BT Tent 12A jointers tent designed to be large enough to cover a PCP (7x7) cabinet with G.fast bolt-on pod

- Also known as BT Jointers Tent 12A
- Aluminium framework 20mm tubing
- Steel support brace
- Zipped openings both ends
- Waterproof, fire retardant and UV resistant reinforced polyurethane material
- Convenient lifting handles
- Quick to erect and pack away (approx. 2-3 mins)
- No loose components - integrated frame & cover
- Folded dimensions 1.2Mtr x 1 Mtr x 30cm
- Weight 21.5Kg



Item	Description	Height	Width	Depth	Price
811979	G.fast Cabinet Jointers Tent	1800mm	2000mm	1200mm	£475.00

Versatile Tent

Designed as a free standing tent for engineers working in jointing chambers

- Can be erected by a single person within 2 minutes
- The translucent covering material has been selected for its fire retardant, U.V. performance and waterproof properties
- 40mm tubular aluminium legs
- Supplied with a carrying bag designed with suitable drainage for when the tent is folded wet



Item	Description	Height	Width	Depth	Price
811064	Versatile Tent	1605mm	1750mm	940mm	£275.00

Pop-Up Jointers Tent

Useful pop-up ground tent popular with jointers and telecommunications engineers working on poles

- Pole tent specially adapted door to encapsulate pole
- Velcro opening and closing to allow tight seal
- A & D door access



Item	Description	Height	Width	Depth	Price
792601	Jointers Tent	2Mtr	1.8Mtr	1.8Mtr	£238.91

Pole Cover & Street Cabinet

Versatile hard wearing covers for street cabinets and poles for engineers wanting to be protected from rain or heavy sunshine

- Offers coverage against the elements whilst working in or around cabinets and poles
- Multi-sided cover offering full or partial protection against rain and sun
- Hard wearing material includes frame



Item	Description	Price
823679	Adjustable Pole Cover	£123.50
823776	DSLAM Street Cabinet Cover	£174.50

Contractors Umbrella

Work umbrellas allow easy temporary shade or cover, invaluable whilst carrying out telecommunications work in all weathers

- Tilt mechanism
- Detachable curtain with windows
- Fibreglass non-conductive - Reduced exposure to lightning strike
- Waterproof Material including Taped Seams 100% waterproof
- Tent pegs and guy ropes
- PU coated 230D Polyester
- Flame retardant - CPAI - 84
- Pole diameter 22.5mm (Telescopic inner pole dia 19mm)
- Complete weight - 3kg



Item	Description	Price
832612	Contractor's Umbrella	£51.70

Jointer's Umbrella

Durable umbrellas with tilting function to provide shade in all conditions

- Tilt mechanism
- 3 prong detachable spike
- PU Coating
- Air pressure relief vents in top of canopy
- Waterproof and flame retardant
- Heavy duty storage bag with shoulder strap
- Pole diameter 22mm (telescopic outer dia 25mm)
- Weight 2.5kg



Item	Description	Price
832613	Jointer's Umbrella	£35.80

Universal Umbrella Clamp

This clamp is designed for cabinet work and can be fixed to almost any surface

- G-clamp design
- Pole diameter 28mm to 35mm
- Jaw opening maximum 9cm
- Umbrella pole locking screw
- 360 degree rotation - positive locking increments
- Manufactured from high grade steel



Item	Description	Price
832727	Universal Umbrella Clamp	£86.98

Site Equipment

Folding Jointers Stool



A heavy duty folding stool popular with jointers



Item	Description	Price
829924	Jointers Stool	£17.60

Folding Jointers Stool

A heavy duty folding stool popular with jointers



Item	Description	Height	Width	Depth	Price
992650	Jointers Stool	435mm	360mm	328mm	£17.48

Large Folding Stool

A versatile compact folding stool designed for easy storage

- Features grip dots for added stability
- Compact folding storage
- Easy and light to carry
- Carry handle when folded for easy transportation
- Max height when in use 39cm



Item	Description	Height	Width	Depth	Price
819429	Step Stool	390mm	290mm	220mm	£14.37

Waterproof Sheet

General purpose waterproof sheet with eye ringlets

- Also known as BT Waterproof Sheet No.2



Item	Description	Width	Length	Price
782628	Waterproof Sheet	1980mm	1980mm	£68.69

Heavy Duty Ground Sheets

Heavy duty waterproof cotton canvas tarpaulin

- Before proofing the cotton tarpaulin is 14oz
- Seams are double sewn



Item	Description	Width	Length	Price
992649	Canvas Sheet	5'9"	5'	£27.65

Oil-Only Spill Kit

Suitable for small spills and especially useful when carried with tools and machinery where they can be deployed in an emergency

- Kit includes absorbing pads, socks, disposal bag and ties
- Contained in a clear re-sealable bag
- Suitable for oil-only



Item	Description	Size	Price
200241	Oil Spill Kit	15 Litre	£15.11

Multi-Purpose Spill Kit

Multi-purpose spill kit suitable for solvents, acids, caustics, oil and fuel

- Kit includes 20x absorbing pads, 2x socks, disposal bag and ties
- Complete with instruction sheet
- Absorbs 20 litres
- Conforms to BS7959-1




Item	Description	Size	Price
791162	Chemical Spill Kit	20 Litre	£16.00

Spill Protection System



Allows fuels and oils to be absorbed into the base whilst allowing the water to escape contaminate free

- Material is crush, UV, abrasion and puncture resistant
- External dimensions 1000mm x 685mm
- Internal dimensions 880mm x 565mm
- Absorbency 4.5ltr (liners also 4.5ltr)
- Net weight 2Kg (liners 1Kg)
- Liners are reusable

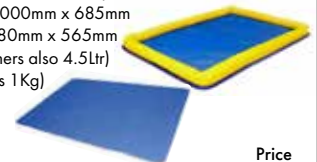

Item	Description	Price
816429	Spill Protector	£221.61
816430	Absorbent Liner	£44.37

Petrol Powered Generator (Dual 110V)

Robust and reliable petrol powered generators comprising of a heavy duty maintenance free alternator, cast iron cylinder and rugged frame

- Quad clean heavy duty cyclonic air cleaner
- Engineered for enhanced durability
- Oversized mufflers, steel forged crankshafts and oversized ignition systems
- Low oil shut down
- Engine designed in the USA
- Supply 110V (2 Sockets)
- Continuous rated output 2.4KVA
- Maximum output 2.75KVA
- Kohler 7.5hp engine
- Unleaded petrol
- Tank capacity 4.1ltr
- Running time (approx.) 3 hours



Item	Description	Engine	Output	Tank Size	Supply	Price
798249	Petrol Generator	7.5hp	2.4KVA	4.1Ltr Tank	2x 110V Sockets	POA

Petrol Powered Generator (110V/220V)

Dual voltage petrol driven generator

- Maximum output of 2.2kW
- Dual voltage output 110V/220V
- 5.5HP 4 stroke petrol engine
- Full surround frame for site working
- 13 hours continuous operation from 15 litre fuel tank
- Low noise level (65dB)
- Weight 35kg



Item	Description	Voltage	Wattage	Price
795632	Petrol Generator	110V	2000W	POA

110V Ventilator with Duct Hose

A lightweight, portable 110V cold air blower with double wall polyethylene construction for extended lifetime and protection. Moves up to 868 cubic metres of air per hour, and with ducting the air can be moved 14 metres

- Also known as BT Cold Air Blower



SUPPLIED WITH 2x 7mtr HOSES



Item	Description	Price
795633	Ventilator 110V	£229.31

Site Equipment

Koshin Ponstar Automatic Submersible Pump

A compact light and easy to handle contractors submersible pump

- 2" hoesetail outlet for convenient use
- Flow rate of up to 290 litres per minute
- Maximum pump height 10 metres
- Twin mechanical seal
- Cast iron impeller for long durable life
- Designed to allow pumping of sandy water



Item	Description	Mfr Ref	Price
813124	Submersible Pump (110V)	PB55011	£355.00

Submersible Water Pump 3A

Submersible 110V water pump with 2" outlet

- 2" layflat hose sold separately (823707) suitable for submersible pump
- Output: 450W
- Max Flow: 260 l/min
- Max Head: 11Mtr
- Electric Source: 110V/50Hz



Item	Description	BT Ref	Price
795634	Submersible Pump (110V)	3A	£205.02

Petrol Water Pump Hoses

Hoses specifically designed for use with surface pumps with a 2" diameter

- 2" Diameter
- Layflat hose for compact storage when not in use
- Robust fittings
- Super strong construction



Item	Description	Diameter	Length	Price
823707	Layflat Hose	2"	15Mtr	£27.00

Petrol Water Pump

Petrol driven 2" water pump offering 600 litre/minute water flow rate with a maximum pumping head height of 28 metre and a 8 metre maximum suction head. Built in a robust carry frame, the water pump features a low oil shut down to help protect the water pump from damage.

- Built in a robust carry frame
- Suitable for agricultural and industrial use
- 7hp Petrol engine
- Tough cast iron impeller



Item	Description	Outlet	Price
814155	Petrol Water Pump	2"	£194.00

Petrol Water Pump Hoses

Hoses specifically designed for use with surface pumps with a 2" diameter

- 2" Diameter
- Robust fittings
- Super strong construction



Item	Description	Diameter	UoM	Price
814156	Water Pump Hose	2"	10Mtr	£77.60

Water Sample Kit

Water sampling kit supplied in a rugged lightweight plastic case. For sampling water in line with UK Environment Agency guidelines which requires the sampling of water from underground structures before de-watering can take place

- Easy to use
- Purpose designed for on-the-spot assessment



Item	Description	Price
100033	Water Sampling Kit	£52.80

Site Transformers

Portable power transformer for use with 110V equipment

- Suitable for use with power tools and site lights
- Converts 240V to 110V
- Heavy duty for site use



Item	Description	Rating	Outlets	Price
788585	Site Transformer	1.5kVa	2x 16A	£67.23
788586	Site Transformer	3.3kVa	2x 16A	£61.05
825162	Site Transformer	5kVa	2x 16A, 1x 32A	£151.09

110V Extension Lead

110V 16A Cable extension lead

- Used to connect 110V equipment to power transformer
- Hinged cover on socket
- Pin configuration: 2P+E
- CEE 7/7 plug to CEE 7/7 coupling socket
- Compliant with IEC 60309-2



Item	Description	Length	Price
833004	Extension Lead 16A	14Mtr	£17.95

Commando Plug Splitters

Commando plug splitters for splitting one power source into two separate feeds

- 32A and 16A power splitter
- Length 0.5Mtr



Item	Description	Price
800780	Splitters 16A-2x16A	£16.97
800781	Splitters 32A-2x16A	£48.50
800783	Splitters 32A-2x32A	£29.98

Site Transformer Accessories

Heavy duty impact resistant commando plugs and sockets for site and industrial use

- IP44 Rated
- Splashproof



Item	Description	Price
784005	230V Plug 16A	£3.12
794560	230V Plug 32A	£4.27
784002	110V Socket 16A	£3.89
784004	230V Socket 16A	£3.99

Industrial Cable Reels with Thermal Overload Protection

Robust, heavy duty, steel-framed cable reel including thermal overload protection with power reset button

- 2x 240V sockets
- Thermal overload protection
- Max load 13A
- Rewind handle



Item	Description	Length	Price
782657	Industrial Cable Reel	25Mtr	£31.03
783914	Industrial Cable Reel	50Mtr	£58.19

110v Industrial Cable Reels

2 socket 110 reel extension

- An open reel extension cable on a metal stand
- Thermal overload and power reset button
- Maximum load 16A



Item	Description	Size	Length	Price
700095	Extension Reel	110V	25Mtr	£51.14

Site Equipment

12V Vehicle Inverter

A regulated 12V DC-to-AC inverter to power 230V AC equipment up to 150W from a suitable 12V car or lorry battery. It is important to ensure that the power rating of the appliance is less than the continuous power of the inverter

- DC to AC inverter
- 150W Output power
- 10-15V DC input voltage
- 100-240V AC output voltage
- Cigar lighter plug input connector
- Battery low alarm
- Battery low shutdown
- Overload and over temperature protection



Item	Description	Type	Price
817928	DC to AC Inverter	12V to 230V	£44.40

Lithium Polymer Battery Pack



Battery pack suitable for applications where a 12V power source is required and mains power cannot be accessed

- Provides independent power source for routers, at cabinet or at customer premises
- Built in fuel gauge
- Robust ABS casing and soft grip texture
- Safety features include overcharge/over discharge protection and thermal protection
- Supplied with TR8141 cable perfect for BT router (instead of 12V DC female adaptor cable)



Item	Description	Amp	Price
801697	Lithium Polymer Battery Pack	4Ah	£104.38

Standard Alkaline Batteries

Premium quality, high performance alkaline batteries



Item	Description	Volts	UoM	Price
819100	AA (LR6) Battery	1.5V	Pk of 4	£1.14
994120	AAA (LR03) Battery	1.5V	Pk of 10	£1.11
826823	C (LR14) Battery	1.5V	Pk of 4	£1.78
993889	D (LR20) Battery	1.5V	Pk of 10	£13.66
819433	PP3 (6LR61) Battery	9V	Pk of 4	£4.00

Plus Power Alkaline Batteries



These plus power alkaline batteries are high performing and long-lasting for all electronic devices

- AA, AAA, C, D and PP3 available
- Ideal for daily use
- Long shelf life



Item	Description	Volts	UoM	Price
788575	AA (MN1500) Battery	1.5V	Pk of 4	£2.62
788580	AAA (MN2400) Battery	1.5V	Pk of 4	£2.62
788581	C (MN1400) Battery	1.5V	Pk of 2	£2.62
788582	D (MN1300) Battery	1.5V	Pk of 2	£3.15
788583	PP3 (MN1604) Battery	9V	Each	£2.62

6V Zinc Carbon Battery



6V zinc carbon battery 4R25R (PJ996)

- Suitable for a variety of different applications



Item	Description	Volts	Price
992358	Zinc Carbon Battery	6V	£3.27

SLA Sealed Lead Acid Rechargeable Battery



Sealed lead acid rechargeable battery commonly used in alarm systems, emergency lighting, ride on toys, torches, UPS systems and other electrical systems

- Weight 2.3Kg
- Dimensions 151mm X 65mm X 98mm
- Capacity 1Ah



Item	Description	Voltage	Mfr Ref	Price
783330	Battery	12V	NP7-12	£14.59

Steel

Tubular steel shafted solid socket designed for the professional for heavier usage. Contoured tubular steel handles are rotatory welded into the body of the shovel socket for extra strength and rigidity - thus producing a very robust yet lightweight tool for digging. Outperforms the requirements of BS3388 under all tests.



Polyfibrepro

Solid forged contractors tools offering a high degree of fibreglass strength along with the comfort of a profile moulded PYD hand grip. Injection moulded polypropylene sheathing totally encloses the polyester resin fibreglass core - virtually eliminating the danger of handle breakage and potential injury. PolyFibrePro tool handles will not rot, shrink, dry out or become more susceptible to breakage through periods of inactivity. Outperforms the requirements of BS3388 under all tests.

Shocksafe


A range of insulated contractors tool providing full conformity to the exacting specifications of 'BS8020: Tools for Live Working'. BS8020:2002 demands full adherence to detailed manufacturing and testing procedures for safe working practices to be maintained by the user when working on or in close proximity to live conductor cables. A specially integrated collar prevents the user's hand slipping onto the steel blade. Every single tool is tested to 10,000 Volts before being uniquely numbered and the issue of certificate, unique to each implement. This ensures total traceability and a guarantee of safety to the user, in a potentially dangerous live-working environment.

Square Mouth Shovels

Used for shovelling out or concrete mixing, working tarmac and cement, backfilling trenches and manoeuvring ballast. An all round, multi-use shovel



- Also known as
Shovel Stoking No2 Square

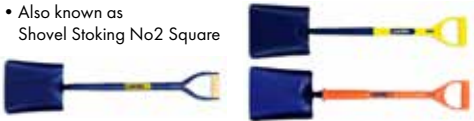

Item	Description	Type	Price
825210	Square Mouth Shovel	Steel Shaft	£15.66
825211	Square Mouth Shovel	Polyfibre	£23.04
815997	Square Mouth Shovel	Shocksafe	£43.59

Trenching Shovels

Often known as a '2-way' in some trades. Used for digging and cleaning out narrow trenches for cable and pipe laying



Item	Description	Type	Price
825214	Trenching Shovel	Steel Shaft	£17.19
993367	Trenching Shovel	Polyfibre	£22.38
810630	Trenching Shovel	Shocksafe	£43.59

Grafting Spades

Grafting spade with a slightly dished blade and round cutting edge, designed for clay digging and heavy ground breaking




- Also known as
Spade Digging



Item	Description	Type	Price
825209	Grafting Spade	Steel Shaft	£18.30
200201	Grafting Spade	PolyfibrePro	£22.48
825212	Grafting Spade	Shocksafe	£43.59

Taper Mouth Shovels

Preferred by some users as an alternative to the Square Mouth. Used for shovelling out or concrete mixing, working tarmac and cement, backfilling trenches and manoeuvring ballast



Item	Description	Type	Price
825213	Taper Mouth Shovel	Steel Shaft	£14.55
200169	Taper Mouth Shovel	Polyfibre	£22.12
815988	Taper Mouth Shovel	Shocksafe	£43.59

Cable Laying Shovels

Often known as a '1-way' in some trades terminology, these spades have been designed for cable and pipe laying with a slim blade that is ideal for digging out narrow trenches



Item	Description	Type	Price
808411	Cable Laying Shovel	Steel Shaft	£17.19
825215	Cable Laying Shovel	PolyfibrePro	£22.38
810631	Cable Laying Shovel	Shocksafe	£43.59

Site Equipment

Newcastle Drainers

Often referred to and known as a 'grafter' these long blade spades have been designed for digging deep and narrow trenches, channels and post holes



Item	Description	Type	Price
825216	Newcastle Draining Spade	Steel Shaft	£19.22
200131	Newcastle Draining Spade	PolyfibrePro	£24.57
815985	Newcastle Draining Spade	Shocksafe	£43.59

Rabbiting Spades

Traditionally used for digging tight and confined post holes. Longer handles maximise reach and reduce potential user strain injuries, while the rounded corners reduce 'snag ups' and the risk of unwanted damage. Mainly used by fencing contractors, utilities and local councils, the post hole 'rabbit' spade is a versatile contractors favourite



Item	Description	Type	Price
825217	Rabbiting Spade	Steel Shaft	£42.46
200200	Rabbiting Spade	Fibreglass	£49.38
789244	Rabbiting Spade	Shocksafe	£55.94

Digging Bars

These digging bars have been specifically designed and are used by telecom contractors, the digging bar is designed to tamper any loose material around tightly fit telegraph poles making them easier to remove or aid packing prior to replacement



Item	Description	Type	Price
782619	Digging Bar	Fibreglass	£64.69

Punner (Half Round)

Also known as a Kidney Punner. Used for consolidating earth, hardcore and tarmac and particularly useful for tampering around lighting columns and telegraph poles



Item	Description	Type	Price
200313	Punner Half Moon/Kidney	Fibreglass	£80.00
825220	Punner Half Moon/Kidney	Shocksafe	£97.14

Iron Punnors

Iron punners, also known as square rammers, are used for consolidating earth, hardcore and tarmac. Particularly useful for tampering around lighting columns and telegraph poles but unlike half moon punner, iron punners have a square edge making them useful when close to walls and corners where other punners and machinery would leave a ridge



Item	Description	Type	Price
816025	Iron Punner	Steel Shaft	£21.01
200312	Iron Punner	Fibreglass	£49.03
825221	Iron Punner	Shocksafe	£54.26

Excavating Spoons


Solid forged excavating spoon designed to scoop out loose earth from the bottom of deep trenches and post holes



Item	Description	Type	Price
200063	Excavating Spoon	Fibreglass	£75.00
825223	Excavating Spoon	Shocksafe	£87.48

Shovel Hokers

Scissor action post hokers for digging post and pipe holes and clearing rubble and soil from the dug holes around posts or pits. Pointed tip for greater penetration with a carbon steel dished blade for extra strength



Item	Description	Type	Price
789245	Heavy Duty Shovel Hoker	Steel Shaft	£78.47
200170	Heavy Duty Shovel Hoker	Fibreglass	£88.80
825224	Shovel Hoker	Shocksafe	£96.63

Shocksafe Pickaxe

Chisel/Point Insulated Fibreglass Pick Shaft



- Pultruded fibreglass core with an injection moulded polypropylene outer
- BS Standard 3" x 2" eye
- Tested and made in conformance with BS8020:2011
- Suitable for live working



Item	Description	Type	Price
810632	Pick Axe	Shocksafe	£27.56

Crowbars

Fibreglass handled crowbar with pointed tip

- Diameter 32mm



Item	Description	Type	Price
825218	Chisel Bar	Shocksafe	£55.74
100039	Point Bar (Crowbar)	FibremaxPro	£49.84

Spades

Spades with pressed steel head, corrosion resistant finish and varnished wooden T-handle



- Round-mouth blade for moving rubble, concrete and gravel
- Traditional round head for easy soil penetration
- Overall length 100cm
- Head width 24cm
- Head length 30cm



Item	Description	Mfr Ref	Price
815568	Round Mouth Spade	SW100	£11.50

Chisel & Point Crowbar

Chisel & point crowbar made from high quality steel with hardened tips

- Diameter 30mm



Item	Description	Length	Price
993364	Chisel & Point Crowbar	1524mm (60")	£24.76

Wrecking Bars

Drop forged carbon steel wrecking bars

- Working ends hardened and tempered



Item	Description	Mfr Ref	Length	Price
813623	Wrecking Bar	WB300	300mm	£3.33
813624	Wrecking Bar	WB600	600mm	£8.43

Site Equipment

Gorilla Wrecking Bar Set (5pcs)



Gorilla wrecking bar 5 piece set

- Low profile claw for increased prying power
- Wider claw surface for better control
- Made from stamped alloy steel, hardened and tempered with an integral nail puller and polished tips
- 2x Wrecking bars 380mm & 300mm
- 2x Mini utility bars 180mm & 330mm
- 1x Gorilla bar 350mm



Item	Description	Pieces	Price
808418	Wrecking Bar Set	5 Piece	£26.99

Bow Saw



Tait Tools bow saw with a large, thick steel frame for excellent strength and rigidity

- Soft grip handle with knuckle protection
- Easy blade tensioning
- Supplied with blade protector



Item	Description	Mfr Ref	Length	Price
100029	Bow Saw	BS600	600mm	£5.24

Premium Distance Measuring Wheel

A premium distance measuring wheel with brake

- Supplied in its own carrying bag
- Trigger brake in handle
- Tuck-away stand
- Measuring distance: 99999.9m
- Wheel Diameter: 318mm
- Extended Length: 100cm
- Folded size: 55cm



Item	Description	Price
831679	Distance Measuring Wheel	£44.65

Distance Measuring Wheel



The professional lightweight measuring wheel from Bosch

- Ease of use with lightweight aluminium frame
- Wheel diameter of 318.5mm
- Rubber tread for use on any surface
- Telescopic



Item	Description	Mfr Ref	Price
814153	Distance Measuring Wheel	GWM 32	£67.65

Inspection Recording Camera



The EasyView tradesman inspection camera helps you to quickly and easily find issues in hard to reach places, like under floors, within walls and cavities, in ceilings, roof voids, in drains, chimney, gutters and much more

- 8.5mm low light camera and image enhancement software
- Super bright and adjustable LED light
- 4 times zoom and video recording
- Professional soft carry case
- 1000 photo internal memory with an SD card option



Item	Description	Length	Price
808357	Record Inspection Camera	1.5Mtr	£99.95

Cordless Inspection Camera



The Bosch professional range of cordless inspection cameras designed as a compact tool for quick and easy inspection

- 2.7" display
- 320 x 240px resolution
- 1.2Mtr cable camera length
- LED light for lighting poorly lit areas
- Compass view offers a clear spatial orientation
- Comes complete with 4x AA batteries



Item	Description	Model	Price
818312	Cordless Inspection Camera	GIC 120	£166.42

Inspection Cameras



Inspection cameras offer a quick and effective solution in fault finding and investigation in most duct and pipework installations

- Features a sprung camera head with integral light source (LED)
- Spooled system allows for inspection across long distances from 30m - 120m
- Outstanding resolution and image clarity
- Record function for better analysis after event
- Innovative coiled inspection system
- V7 includes carry case and monitor, 30m cable wheel and cable, remote control, SD card, glider attachment, car charger and mains adaptor
- V8 includes robust frame and 120m cable, sprung mounted camera head, DVT monitor (with built in battery) SD card, small & large glider attachments, car charger and mains adaptor

For
Continuous
Duct Rod see
page 176



823818



787490

Item	Description	Type	Length	Price
823818	Duct Inspection Camera	Super Cam V7	30Mtr	£776.00
787490	Duct Inspection Camera	Super Cam V8	120Mtr	£5044.00

BHB Hydraulic Breakers & Replacement Steel Tips



Sturdy and reliable breakers designed for working with Altrad Belle hydraulic power packs

- BHB23 Hydraulic breaker is a medium/heavy weight beaker ideal for concrete and asphalt breaking
- BHB27 Hydraulic breaker is a heavy weight beaker with vibration dampened handles for the most demanding applications
- Replacement tips available



810617

810618

Item	Description	Type	Breaker Steel	Collar to Tip	Mfr Ref	Price
816134	Hydraulic Breaker	Medium Duty	-	-	BHB23	POA
810615	Hydraulic Breaker	Heavy Duty	-	-	BHB27	POA
810618	Hex Large Chisel	Fits BHB25, BHB25X & BHB27	32mm x 160mm	380mm (15")	-	POA
810617	Hex Tarmac Cutter	Fits BHB25, BHB25X & BHB27	32mm x 160mm	280mm (11")	-	POA

Site Equipment

Hydraulic Power Pack

Hydraulic power packs are the 'economic on-site' power solution, three times more efficient than typical pneumatic power systems

- Extremely portable, fitting in most estate car boot spaces
- Power on demand, the engine idles until power is required
- Low hydraulic oil cutout system stops expensive damage to tools and pumps
- Hydraulic oil level and filter condition gauges
- Supplied with braided siamese hose and non-drip flat-face couplings



Item	Description	Mfr Ref	Weight	Height	Width	Length	Price
810616	Petrol Hydraulic Power Pack (Honda)	Belle Major 30-140	72Kg	560mm	540mm	720mm	POA

Compaction Plate

Compaction plates, also known as 'Wacker Plates' are designed for compaction of soil, sand, grit and loose ground materials in footways, footings and trenches before the final top layer materials are added. Compaction plates can also be used on tarmac to finish the surface



Item	Description	Type	Mfr Ref	Price
810624	Compaction Plate	350mm/14 Inch	VP 1135A	POA

Trench Rammer

Trench rammers, also known as 'Wackers' are designed for the compaction of soil, sand, grit and loose ground materials in newly dug trenches before the ground is covered and sealed

- Ideal for curbs, gutters, footings, forms, columns, drains, ditches, sewers and trenches
- Shockmount handle system designed to reduce hand-arm vibrations
- Slim design for compaction jobs in narrow trenches



Item	Description	Type	Mfr Ref	Price
810625	Trench Rammer	150mm/6 Inch	BS 50-2	POA

Petrol Cut Off Saw

Compact cut off saw with excellent cutting and guide characteristics

- Reduced-emission engine technology
- Manual fuel pump (Purger)
- Pre-separation air filtration system
- Extremely low vibration levels (3.9m/s)
- Semi automatic drive belt tensioning
- For use with 300mm cutting wheel



Item	Description	Power	Mfr Ref	Price
810626	Petrol Cut Off Saw	3.2kW	Stihl TS410	POA

Dust Suppression Water Bottle

10 Litre capacity pressurised water container providing a mobile water supply for clean, wet cutting without dust build up

- Recessed grip and stable base
- Extended operating time on each full tank
- Large filling tunnel with cover
- Pressure limit 3 bar
- Comes with coupling as standard



Item	Description	Mfr Ref	Capacity	Price
810627	Dust Suppression Water Bottle	6706000	10Ltr	POA

Diamond Blade Cutting Discs

High quality 300mm cutting discs from Stihl



Item	Description	Type	Diameter	Price
813494	Diamond Disc	Asphalt Cutting	300mm	POA
813495	Diamond Disc	Concrete Cutting	300mm	POA

Site Equipment

HA104 Bedding Mortar



Ultibed HA104 is a fast setting and hardening bedding mortar to allow the rapid installation and opening of highway ironwork installations and repairs

- 15 minute working time
- Can be used in wet conditions
- High bond strength
- 5N/mm²; tensile strength after 3 hours
- 30N/mm²; compressive strength after 3 hours



Item	Description	Size	Price
819328	Bedding Mortar	18.5kg + 2.5Ltr Tub	POA

Bedding Mortar HA104 Flowable 18.5Kg + 2.5Ltr Tub



A two component, high performance fluid mortar designed for rapid installation and repairs. Compatible with concrete, brick and stone substrates

- Controlled quick setting
- High early strength
- Easy to use



Item	Description	Size	Price
819329	Bedding Mortar	18.5kg + 2.5Ltr Tub	POA

Ultibed Concrete 25kg Bag



Rapid setting high performance concrete designed for permanent installation and repair to concrete structures, highways and backfill applications

- Contains no chlorides
- Shrinkage compensated in both the plastic and hardened states
- Containing special cements and graded aggregates
- Ideal for backfill of carriageway ironwork



Item	Description	Size	Price
819330	Ultibed Concrete	25Kg Bag	POA

Ultibed Flowing Concrete 25kg Bag



Ultibed flowing concrete is a rapid setting high performance flowable concrete designed for permanent installation and repair to concrete structures, highways and backfill applications

- No special curing requirements
- Can be used at temperatures as low as 10C
- Open to pedestrian traffic in 45 minutes and vehicle traffic after 90 minutes
- Shrinkage compensated



Item	Description	Size	Price
819331	Ultibed Flowing Concrete	25Kg Bag	POA

40N Quick Set Concrete



Quick set 40N concrete is a high performance quick-setting concrete ideal for the fast and efficient installation of posts, signs and other highways furniture

- 40N/mm² final compressive strength
- Easy to use, pre-blended component product - just add water & mix



Item	Description	Pack Size	Price
819332	40N Quick Set Concrete	25Kg Bag	POA

Edgemaster Bitumin Seal & Tack Coat 750ml Aerosol



Ultipatch Edgemaster is an emulsion based bituminous aerosol designed to complement Tarmac's Ultipatch highway repair and reinstatement range

- Adheres to ironwork, concrete and bituminous substrates enabling even the smallest repairs to be completed effectively
- Can be applied in all weathers
- Seals cracks instantly
- Provides a durable, long lasting finish



Item	Description	Size	Price
804131	Edgemaster Bitumin Sealer	750ml	POA

Instant Road Repair

Cold lay asphalt concrete for permanent repairs in footways, footpaths and cycle tracks



- 6mm grade - for permanent repairs in footways, footpaths and cycle tracks
- 10mm grade - for permanent repairs in type 3 & 4 roads
- HAPAS Approved since 2002
- Can be used in all weathers
- No waste - resealable tubs
- Use with SCJ for a permanent repair



Item	Description	Volume	Price
809073	Instant Road Repair 6mm	25Kg Bucket	POA
817891	Instant Road Repair 10mm	25Kg Bucket	POA
817892	SCJ Seal & Tack Coat Spray	750ml	POA

Crayon Marker

Crayon markers for use on most materials including concrete, metals, ceramics and timbers

- Great for marking concrete, timber and metals
- Suitable for use on oily, wet and dry surfaces
- Bright yellow marking



Item	Description	Uom	Price
300039	Crayon Marker	Each	£1.02

Survey Spray Line Marking Paint Aerosol



A high quality, fast drying and hard wearing acrylic marking paint for use on concrete, tarmac, woods and composites

- Lead and xylene free formulation
- Unique spray head imparts a narrow spray pattern allowing letters and numbers to be marked accurately and legibly
- Volume 750ml



Item	Description	Colour	Price
300152	Spray Line Marking Paint	Blue	£4.40
300153	Spray Line Marking Paint	Green	£4.40
300154	Spray Line Marking Paint	Red	£4.40
300155	Spray Line Marking Paint	White	£4.40
300156	Spray Line Marking Paint	Yellow	£4.40

Over-Banding Tape



Tarmac over-banding tape is a quick and efficient way of applying high quality thermoplastic preformed overbanding tape to seal joints in asphalt surfaces, preventing water ingress and associated frost damage

- Use to prolong the life of the asphalt repair
- Has anti-skid grain already premixed meaning no additional drop on material required
- Can be trafficked in 10 minutes to minimise road closure times

Length
5Mtr



Item	Description	Width	Depth	Price
819335	Over-Banding Tape	35mm	3mm	£13.39

Galvanised Wheelbarrow

Lightweight galvanised steel wheelbarrow ideal for a wide range of light construction applications

- Constructed with strong tubular steel frame and rubber gripped handles
- Fitted with a pneumatic tyre



Item	Description	Type	Volume	Price
810647	Wheelbarrow	Galvanised	65Ltr	£50.11

Site Equipment

Galvanised Steel Buckets

A selection of steel buckets ideal for use on site

- Robust galvanised steel
- Available in 7Ltr (1.5 Gallon) & 12Ltr (2.5 Gallon)



Item	Description	Volume	Price
200070	Galvanised Steel Bucket	7Ltr	£4.95
823689	Galvanised Steel Bucket	12Ltr	£5.82

Plastic Bucket

General purpose plastic bucket

- Ergonomic steel carrying handle
- Plastic grip for comfort
- Pouring spout for convenience



Item	Description	Volume	Price
795620	Plastic Bucket	14Ltr (3 Gallon)	£1.55

Heavy Duty Polyethylene Flex Tub

Strong and durable tubs

- Lightweight, heavy-duty polyethylene, flexible tub features super-strong comfortable handles and is ideal



Item	Description	Volume	Price
810645	Plastic Bucket	28Ltr (6 Gallon)	£5.03

Rubber Bucket

Rubber bucket for use on site

- 14Ltr (3 Gallon) capacity



Item	Description	Volume	Price
990086	Rubber Bucket	14Ltr (3 Gallon)	£2.96

Dustbin

Heavy duty standard dustbin with lid

- Complete with carrying handles either side



Item	Description	Capacity	Price
810644	Plastic Dustbin	90Ltr	£16.89

Water Containers

Polythene water container

- Complete with screw cap
- Carrying handle on top



Item	Description	Volume	Price
792649	Water Container	10Ltr	£7.16
790593	Water Container with tap	10Ltr	£9.31
795700	Water Container	25Ltr	£10.45

Fuel Container

Ideal for storing in the boot of a car or in the garage, this sturdy plastic fuel can has a flexible pouring spout, tethered screw cap and carry handle

- Spout stores neatly into the handle area when not in use
- Complies with SI 1982/630



Item	Description	Volume	Colour	Price
719157	Petrol Container	5Ltr	Green	£5.81
719158	Diesel Container	5Ltr	Black	£6.00

Fuel Containers

Containers for the transport and storage of fuel for petrol and diesel powered equipment

- Easy pour spouts
- Complies with SI 1982/630



Item	Description	Volume	Price
834114	Jerry Can	5Ltr	£23.16
828283	Jerry Can	10Ltr	£26.00

Bricklayers Trowel

Bricklayers trowel for general purpose brickwork

- Wooden handle



Item	Description	Size	Price
993266	Bricklayer Trowel	250mm	£3.52

Pointing Trowel

Small bladed trowel designed for use in forming brick joints and repairing or replacing weathered joints

- High quality steel blade, with London pattern
- The soft-grip handles provide excellent comfort
- Size: 150mm (6 inch)



Item	Description	Size	Price
200141	Pointing Trowel	150mm	£3.52

Gauging Trowel

Carbon steel blade trowel

- Soft grip handle
- Perfect for mixing small amounts of plaster and filling in gaps



Item	Description	Length	Price
787148	Gauging Trowel	175mm	£3.96

Gardening Trowel

Garden style hand trowel

- Soft grip handle



Item	Description	Overall Length	Price
440016	Gardening Hand Trowel	120mm	£3.73

Plastering Trowel

Lightweight and sturdy plasterers finishing trowel

- 120mm x 280mm
- Tempered carbon steel blade
- ABS plastic handle for comfort



Item	Description	Width	Length	Price
100314	Plasterers Trowel	120mm	280mm	£15.45

Edging Trowel

Edging trowel for applying a rounded finished edge to concrete and render

- The carbon steel blade with one long curved edge is fitted with a full sized soft-grip handle for user comfort
- Blade size: 280mm x 120mm



Item	Description	Size	Price
810623	Edging Trowel	280mm	£8.73

Brooms With Handles

A selection of brooms with handles for various applications

- Supplied with handle
- Soft and hard brush types available



Item	Description	Style	Width	Price
600008	Broom	Soft Coco	12"	£3.86
810634	Broom	Soft Coco	18"	£12.48
810633	Broom	Stiff Bassine	18"	£5.35

Hand Brush

A stiff bristle hand brush

- Wooden handle and tough bristles



Item	Description	Length	Price
782626	Hand Brush	27.9cm	£2.38

Site Equipment

Dust Pans

Traditional style dust pan with pressed steel head and raised shoulders to eliminate spillages

- Large pressed steel head
- Durable hardwood handle
- Raised shoulders to eliminate spillages
- Multiple uses indoors and out



Item	Description	Length	Price
200003	Metal Dust Pan	230mm	£4.29

Dust Pan & Brush

A standard, plastic hand dust pan and brush

- Available in blue
- Soft bristle brush



Item	Description	Price
782660	Dust Pan & Brush Set	£1.18

Wire Brush

Wooden handled wire brushes

- Ideal for cleaning dirt, mud and debris from work tools after use



Item	Description	Size	Length	Price
993255	Wire Brush	Small	20cm	£4.96
993259	Wire Brush	Large	32cm	£1.80

Cotton Dust Sheet

100% Cotton twill dust sheet

- Cotton dust sheet absorbs spills and protects from dust



Item	Description	Width	Depth	Price
790589	Dust Sheet	12'	9'	£8.52

Protector Cotton Twill Dust Sheet

Absorbent cotton twill sheet with water resistant backing for maximum protection against spills

- Dual protection against dust & liquids
- Polythene backing stops tread through
- Anti-slip



Item	Description	Width	Depth	Price
825570	Protector Dust Sheet	12'	9'	£9.20

Work Area Protection Mat



A work area protection mat ideal for use in customer premises

- Includes a liquid repellent backing offering improved protection in case of a spillage



Item	Description	Mfr Ref	Width	Length	Price
823022	Work Mat	WM150	80cm	150cm	£9.22

Rough Terrain Scissor Lift Table

The LiftMate mobile scissor lift table and trolley has been designed to give long service with minimum maintenance required

- Light, portable, highly manoeuvrable and easy to use
- Folding handle for easy storage & transportation
- Manual hydraulic operation (foot pump)
- Can be used safely at any height
- Fitted with two total stop brakes as standard to prevent the table from moving when loading and unloading
- Capacity 200Kg
- Weight 74kg



Item	Description	Height	Width	Length	Price
810629	Mobile Scissor Lift Table	340-1000mm	500mm	1000mm	£396.00

Stair Climber Trolley

Durable stair climber truck

- Sturdy tubular steel frame
- Quick release tension strap for securing items to the truck
- Max Load 75Kg
- Weight 16.2Kg



Item	Description	Price
821297	Stair Climber Trolley	£67.10

Folding Box Trolley

Lightweight trolley, folds down completely for storage or carrying

- Re-opens in seconds
- Easily stowed
- Smooth rolling rubber tyres
- Adjustable telescopic handle
- Extended dimensions 840x360x300mm



Item	Description	Price
821298	Folding Box Trolley	£27.22

Folding Aluminium Trolley

Robust aluminium frame folding trolley with telescopic handle and large sturdy wheels

- Folds flat for neat storage
- Max load capacity 90Kg
- Folded dimensions 780x485x55mm
- Platform size 280x485mm



Item	Description	Price
821299	Folding Trolley	£35.74

Toughsystem Heavy Duty Trolley

TOUGHSYSTEM

DeWalt's ToughSystem DSCarrier is a heavy duty metal trolley for transporting ToughSystem boxes

- Metal frame
- Foldable footplate can carry up to 150Kg
- Height-adjustable & foldable brackets support up to 60Kg
- Central box locking mechanism
- 8.5" rubber wheels
- Total product weight 15.4Kg
- Dimensions 955x681x235mm



Item	Description	Mfr Ref	Price
808370	Heavy Duty Folding Trolley	1-70-324	£167.11

Site Equipment

Express Folding Workbench



The Stanley FatMax express folding workbench provides a lightweight, portable and robust work surface with substantial features and material holding capacity. The X-shaped groove allows an extensive range of vertical and horizontal clamps to be attached

- Supports up to 450Kg
- Compatible with numerous clamps of all sizes
- Lightweight, portable and robust design
- Folds in seconds for quick and easy, hassle free set-up, carry and storage
- Large work surface 80cm x 60cm
- Ideal for splicing, fibre work, FTTx applications and more
- Anti-slip feet



Item	Description	Mfr Ref	Height	Width	Length	Price
824052	Express Folding Workbench	1-75672	80cm	60cm	85cm	£95.02

Site
Equipment

Workmate Workbench



The Workmate WM301 bench tool stand vice is ideal for cutting, painting, etc. It can also be used as a workbench sawhorse

- Adjustable swivel pegs and jaw retention grooves provide clamping versatility and reliable material hold
- Rubber feet are anti-slip
- Designed for easy set-up and clean-up
- Dual clamping cranks increase clamping force and versatility
- Folds flat for compact storage and easy transport
- Durable steel frame construction



Item	Description	Price
200314	Workmate Workbench 301	£26.32

12V Handheld Vacuum

12V Lithium-ion cordless dustbuster ideal for those unexpected messes. For larger heavier debris, simply select the high speed to have more power for a spotless clean. The smart tech LED panel tells you when the battery is low, with up to 20mins runtime at low speed, allowing you to get the job done.



- Integral crevice providing longer reach
- Easy to use in hard to reach places with out an additional accessory to misplace
- One Touch Empty 700 ml bowl with washable pre-filter and filter
- Easy to clean filters enable you to keep your vac at top performance
- Easy to charge, mount on wall or use on table. Smart Tech LED Panel shows state of the battery charge
- Runtime: 20 Minutes
- Battery: 2Ah
- Dustbowl: 700ml
- Charge time: 5 Hours
- Weight: 1.1kg

Item	Description	Mfr Ref	Price
829815	Vacuum Cleaner	BHHV320B-GB	£62.31

Henry Industrial Vacuum Cleaner

The industrial 110V yellow plugged version of the Henry vacuum cleaner.

- This machine now comes with A Rated energy consumption and improved performance, ideal for trade use, workshops, and on work sites where an 110V power source is used in conjunction with a transformer
- Yellow industrial 110V plug
- Compact whilst offering 9Ltr capacity
- 620W motor
- 9Ltr Capacity
- Easy to change HepaFlo bags
- Energy efficiency rating: A
- Four wheels for stability
- 10Mtr Cable with built-in rewind storage system



Item	Description	Type	Rating	Price
803980	Henry Vacuum Cleaner	Industrial	110V	£124.21

Wet & Dry Vacuum Cleaner 1250W/230V

High powered, lightweight vacuum cleaner with blower facility

- Standard model constructed from high impact plastic fitted with a 4Mtr cable
- Industrial model is constructed from stainless steel fitted with a 4.5Mtr cable
- Tool storage points on head and base
- Both models are supplied with a tool kit, cartridge filter and wet-use foam filter



Item	Description	Power	Price
808358	Vacuum Cleaner	1250W	£101.17
814492	Industrial Vacuum Cleaner	1250W	£125.28

Site Equipment

Van Vaults

High tensile steel storage box with a reinforced lid and advanced protection Vaultlock™ locking system for fixed installation into any commercial vehicle. Independently tested and certified by Sold Secure and Secured by Design, the UK's Police preferred specification.



- Van Vault 2 manufactured from 2mm sheet steel
- Mobi manufactured from 1.5mm sheet steel
- High security concealed piano hinge
- Dual locking on station & lid
- Lid-stay system for easy access
- Fully phosphate anti-corrosion coating
- Fits neatly into any van or can be bolted to any garage, shed or workshop floor
- Van Vault 2 48Kg
- Van Vault Mobi 32Kg



Item	Description	Height	Width	Depth	Price
795622	Van Vault 2	490mm	920mm	560mm	£247.29
813123	Van Vault Mobi	380mm	780mm	450mm	£188.43

Highway Maintenance Stickers

Stickers suitable for vehicle use



Item	Description	Height	Length	Price
810658	Maintenance Sticker	300mm	600mm	£6.31
810659	Maintenance Sticker	350mm	1000mm	£10.67

Driver Vehicle Daily Check & Defect Book

Record your daily vehicle defect checks easily using this standardised check list



Item	Description	Pages	Price
810655	Daily Check & Defect Book	50 Pages	£3.14

Digital Tyre Pressure Gauge

Tyre pressure gauge with easy to read digital display

- Correct tyre pressures prevent premature wear and damage to tyres and give greater fuel economy
- Pressure range: 0-150 PSI or 0.15-10 BAR
- Automatic shut off
- Accuracy: 1 PSI



Item	Description	Price
816478	Digital Tyre Pressure Gauge	£18.69

Tyre Depth Measurement Gauge



Tyre tread depth gauge to quickly check whether tyres are legal and roadworthy

- Fast and easy to read measurements from 1 to 25mm in one millimetre graduations on a sliding barrel
- Helps spot uneven tread wear and tracking errors



Item	Description	Mfr Ref	Price
809587	Tyre Depth Measurement Gauge	TD100	£1.12

Tile Lifters

Suction pad plastic tool for lifting tiles and boards

- Pad diameter: 120mm



Item	Description	Lifting Cap	Pad Dia	Price
800278	Tile Lifter Single Pad	35Kg	120mm	£5.10
994455	Tile Lifter Dual Pad	80Kg	120mm	£10.06

Curved Ice Scraper

Useful ice scraper with natural curve



Item	Description	Price
806618	Curved Ice Scraper	£0.49

Windscreen De-Icer

Windscreen de-icer removes ice and defrosts windscreens effortlessly and safely

- Handy trigger spray
- Concentrated formula
- Clears ice fast
- Pack of 12 x 500ml bottles



Item	Description	Volume	UoM	Price
801590	De-Icer Trigger Spray	500ml	Pk of 12	£10.51

Aerosol Spray De-Icer

Aerosol spray de-icer quickly clears frost, ice and snow

- Powerful aerosol works down to -20°C
- Fast acting, drive away quicker
- Prevents dangerous refreeze
- Paintwork safe



Item	Description	Size	Price
300401	De-Icer Aerosol Spray	600ml	£3.83

Screen Wash

A high quality screen wash which quickly removes dirt, grime and insect deposits from windscreens, leaving a bright streak-free finish.

- Helps prevent windscreen washer freeze down to -40C
- High performance to destroy window haze
- Safe on paintwork



Item	Description	Volume	Price
300402	Screen Wash	1Ltr	£2.20

Lubricant Spray WD40

WD-40 protects metal from rust and corrosion, penetrates stuck parts, displaces moisture and lubricates almost anything. It even removes grease, grime and more from most surfaces.

- Displaces moisture to prevent rust and dry out electrical systems
- Smart Straw allows wide and precise spray, providing flexibility



Item	Description	Volume	Price
774223	WD40 Lubricant Spray	450ml	£5.32

Strap Restraint

A selection of strapping for securing items in transit or on site

- Various lengths available
- Ratchet and buckle types available



Item	Description	Width	Length	Price
821586	Strap Restraint	25mm	1Mtr	£4.85

Ratchet Tie-Down Strap J-Hook

Heavy duty weather-resistant polyester webbing j-strap with stitched reinforcement. Suitable for tying down large, bulky and awkwardly-shaped loads during transit

- Resistant to cutting and abrasions
- Conforms to BSEN 12195-2:2000
- WLL 1000Kg
- Breaking strength 2777Kg



Item	Description	Width	Length	UoM	Price
821315	Ratchet Tie-Down	38mm	6Mtr	Set	£14.65

Site Equipment

Ratchet Tie-Down Strap S-Hook

Durable weather-resistant polyester webbing s-hook strap with stitched reinforcement. Ideal for securing equipment during transit or securing external plant equipment on site

- Automatic locking ratchet action
- Quick-release high tension handle
- Cushioned thumb grip for user comfort
- Resistant to cutting and abrasions
- Conforms to BSEN 12195-2:2000
- Breaking strength 735Kg



Item	Description	Width	Length	Price
820708	Ratchet Tie-Down	25mm	4Mtr	£14.47

Padlocks



The Abus 701B series marine grade padlocks have a solid brass body sealed in a protective vinyl cover with drainage channels to protect the cylinder against water and dirt

- Suitable for medium security requirements in severe weather and environmental conditions
- Ideal for securing to vehicles and boats
- Diameter 8mm



Item	Description	Height	Width	Depth	Price
813088	Padlock	68mm	49mm	28mm	£15.52

Heavy Duty Welded Chains

Welded steel chains with heavy duty finish

- Suitable for external use
- Diameter 8mm



Item	Description	Length	Price
813086	Heavy Duty Welded Chain	2Mtr	£23.47

Fire Brigade Key Set

Key set as used by the fire brigade

- Key numbers 1,2,4,11 & 14



Item	Description	Numbers	Price
804454	Fire Brigade Key Set	1,2,4,11 & 14	£6.85

Fire Brigade Drop Key

Drop key as used by the fire brigade

- Chrome



Item	Description	Price
808350	Fire Brigade Drop Key	£6.25

Caution Signs



Self-supporting safety and caution signs



Item	Description	Price
808380	Caution Cabling In Progress Floor Sign	£12.03

Single Person First Aid Kits

HSE compliant 1 person first aid kit suitable for offsite lone working

Contents include;

- 1 x Contents leaflet
- 1 x Large dressing 18cm x 18cm
- 2 x Triangular bandages
- 2 x Cleansing wipes (sterile)
- 1 x Vinyl gloves (pair)
- 20 x Washproof plasters
- 6 x Safety pins



Item	Description	Price
776220	First Aid Kit	£6.28
821585	First Aid Kit includes 5 x 20ml eye wash pods	£8.10

10 Person First Aid Kit

HSE standard first aid kit complete with its own durable plastic first aid box. The kit will ensure that you are compliant with the standard HSE recommendations for low risk environments

Contents include;

- 1 Pack of 6 safety pins
- 4 Triangular bandages
- 2 Eye pad sterile dressings
- 6 Medium sterile dressings
- 2 Large sterile dressings
- 1 Pair of nitrile disposable gloves
- 6 Saline cleansing wipes
- 1 Pack of 20 washproof plasters
- 1 Guidance leaflet



Item	Description	Price
795701	First Aid Kit 10 Person	£11.38

Home & Workplace First Aid Kits (Medium)

The new home and workplace first aid kits comply with BS8599-1:2019

Contents include;

- 1 x Contents leaflet
- 4 x Medium dressings 12cm x 12cm
- 3 x Large dressings 18cm x 18cm
- 3 x Triangular bandages
- 3 x Eye pad & bandages
- 60 x Wash-proof plasters
- 30 x Cleansing wipes (sterile)
- 2 x Microporous tape 2.5cm x 5m
- 9 x Nitrile gloves (pair)
- 3 x Finger dressings 3.5cm x 3.5cm
- 1 x Revive aid (resuscitation device)



Item	Description	Price
808388	First Aid Kit Medium	£22.30

Critical Injury Pack

The BS 8599-1:2019 Critical Injury Pack includes a tourniquet and haemostatic dressing for use in high-risk environments

Contents include;

- 1 x Contents leaflet
- 2 x Nitrile gloves (pairs)
- 1 x Tuffcut scissors
- 2 x Large trauma dressings 15cm x 18cm
- 2 x Haemostatic dressings 10cm x 10cm
- 1 x Tourniquet
- 1 x Thermal blanket



Item	Description	Price
824143	Critical Injury Pack	£74.95

Site Equipment

Eye Wash Pods

Sterile, single use emergency eye wash solution pods for ocular, topical irrigation and wound cleansing. Ready to use, twist off top for ease of use

- Sterile
- Single use
- Ocular, topical irrigation
- Wound cleansing
- Twist off cap



Item	Description	Style	UoM	Price
789349	Eye Wash Pods	20ml	Pk of 25	£6.26

Accident Book

Accident books, as required by the HSE (Health and Safety Executive) to record any accident in the workplace, noting all incidents as soon as they occur

- HSE required
- Complies with the Data Protection Act 1998
- Includes essential information for employers and



Item	Description	Price
808381	Accident Book	£2.97

Reusable Cold & Hot Pack

Hot-cold pack designed for hot and cold therapy. Either leave in the freezer for cold treatment or immerse in hot water, can also be heated in a microwave. Great for treating all manner of soft tissue injuries and for warm relief from muscular and joint aches and pains

- Stays hot/cold for hours
- For hot therapy the use of a cover is highly recommended
- Volume 120g



Item	Description	Width	Length	Price
822989	Reusable Cold & Hot Pack	13cm	14cm	£1.37

Dry Powder Fire Extinguisher

Versatile dry powder extinguisher suitable for multi-risk areas and for all types of fire with the exception of Classes D & F. Stored pressure extinguisher

- Fire rating: 13A/89B
- Approved to BS EN 3



Item	Description	Weight	Class	Price
790112	Fire Extinguisher	1kg	ABC	£19.77
993507	Fire Extinguisher	2Kg	ABC	£24.62

Fire Blanket

A flexible, non-combustible fire blanket for structural fire protection

- Can be cut with standard insulation knife
- No smoke generation
- Effective for standard, hydrocarbon and jet fire applications
- Ductwork and cable tray fire protection



Item	Description	Width	Length	Price
994164	Fire Blanket	1.1Mtr	1.1Mtr	£10.34



**MORE PRODUCTS AND
SPECIAL OFFERS ONLINE**

www.comtecdirect.co.uk

CORNING



Deploy FTTH up to **50 percent faster** than field-spliced networks.
Corning's OptiTap® pre-connectorised solution: it's about time.

Connect to a solution that gives you more speed, simplicity, and profitability. With our field-proven OptiTap® solution, you can pass twice as many homes as before — which could lead to twice the revenue.

No more timely and costly field splicing. Now you can deploy FTTH networks in half the time.



Are You Corning Connected?
Configure. Place. Connect.
Visit www.corning.com/emea/en/ftth

© 2018 Corning Optical Communications. CSR-018-A2-BEN / July 2018

To order call **01480 415414** • Scotland **0141 564 1234** **155**

Site Equipment

Engineers Hand Wipes



A moist wipe ideal for degreasing and cleansing hands and hard surfaces

- Anti Bac Hand & Surface Wipes
- Effective on grime, oil, mastics and grease
- Ideal for any industrial environment that requires fast cleaning without the need for water



Item	Description	Mfr Ref	UoM	Price
820831	Hand & Surface Wipes	HW150	Pk 150	£6.54

Ultragrime Industrial Wipes



Industrial wipes for hands, tools and surfaces. Ultragrime wipes will remove the toughest grime including silicone, bitumen, ink, grease, paint, adhesives and filler foam



Item	Description	UoM	Price
812322	Ultragrime Industrial Wipes	Pk of 100	£7.95



Site
Equipment

PERSONAL PROTECTIVE EQUIPMENT

STAY SAFE ONSITE WITH OUR RANGE OF PERSONAL PROTECTIVE EQUIPMENT



Safety Helmet EVOLite Skyworker



Sonis 1 Ear Defenders



Sonis Ear Defender Hygiene Kits



EVO Safety Goggles



Stealth 9000 Safety Glasses

See our full range of PPE on pages 164 - 174



3-Step Skin Safety Cradle Dispenser



Cradle dispensing system for 3-step skin care-protect, cleanse and sanitise. Ideal for mobile vans, work cabins and other areas of limited space

- Can hold 3 cradle cartridges (available separately)
- No mechanical parts
- Pre-drilled in four places



Item	Description	Price
810656	Skin Safety Cradle	POA

Hand Cleanser



Fast acting hand cleaner to effectively and rapidly remove oil, grease and general dirt. The added conditioner helps maintain the skins natural moisture level

- Solvent free heavy duty hand cleanser
- Contains non abrasive micro polymer granules for a deep down clean
- Suitable for deep clean to remove ingrained oil and grease as well as most paints and adhesives
- Dermatologically tested
- Supplied with a pump



Item	Description	UoM	Price
796625	Hand Cleaner	4L	POA

3-Step Skin Safety Cradle Dispenser Refill Cartridges



Refill cartridges for safety cradle dispenser

- Hand cleaner 750ml Lime
- Protective foam 700ml
- Hand sanitiser 750ml Lime



Item	Description	Mfr Ref	Price
821018	Hand Cleaner Refill	CRH36V	POA
821017	Protective Cream Refill	CRC340	POA
821020	Skin Sanitiser Refill	CRA360	POA

Paper Towels

2 Ply multi-wipe paper towels

- Hygiene Roll: Sheet size 450mm x 250mm
- Centrefeed Roll: Sheet size 400mm x 175mm



Item	Description	Sheets	Price
994346	Paper Towel 2 Ply Hygiene Roll	88	£1.29
825023	Paper Towel 2 Ply Centre Feed	200	£2.20

Cleaning Rags

Press packed silk free cleaning rags

- 10Kg Nett packs



Item	Description	Type	Weight	Price
796301	Cleaning Rags	Silk Free	10Kg	£15.02

Heavy Duty Rubble Sacks

Heavy duty rubble sacks suitable for disposing of sand, gravel, rubble and general building waste. These builders bags are reusable and recyclable

- Thickness: 440 gauge
- Size: 500 x 760mm



Item	Description	UoM	Price
812757	Heavy Duty Rubble Sacks	Pk of 100	£24.25

Site Equipment

ATEX Torches & Flashlights

Designed to be an intrinsically safe range of LED flashlights and torches featuring high powered CREE LEDs

- High powered CREE LEDs
- ATEX zone O gas compliant
- ATEX-FL4 IP67 rated, 3m submersible
- ATEX-RA2 IP54 rated, water resistant



Item	Description	Lumens	Price
797629	Flashlight	150	£36.95
818480	Right Angle Torch	270	£55.29

COB LED Torch



A dual function COB LED torch with pocket clip

- Direct LED beam on the end with powerful COB light built in to the handle
- Useful fixing magnet on one end
- Length 167mm
- Requires 3x AAA batteries not included. See pg 134



Item	Description	Power	Lumens	Price
809300	Pocket Inspection Light	1W	120	£2.75

Rubber Torch

Heavy duty rubber torch with carry strap

- Bright 3 x LED beam
- Carry strap
- Long life LED technology
- Requires 2x D batteries (not included) See pg 134
- Size: 10" (25cm)



Item	Description	Price
990154	Rubber Torch	£4.24

Rechargeable Hand Light



Rechargeable hand light with tilt function and magnetic base

- 260 lumen power
- 120m light distance
- 3 hour runtime
- 2 in 1 light
- USB rechargeable
- Car charger included
- 90 degree rotation
- Built-in hanging hook



Item	Description	Price
823024	Rechargeable Hand Light	£11.30

Premium Zoe Headlamp



Offers a powerful light beam thanks to its 5 LEDs and its power of 110 lumens. It has a switch to light 1, 3 or 5 LEDs or to be in flash mode. It is resistant to water and shocks

- Battery life: 8 hours
- Beam visible at 30 metres
- 2 AAA (LR03) batteries supplied



Item	Description	Price
833056	Zoe Headlamp - 5 LED	£14.90

1W LED Head Torch



LED 1 watt head torch with 4 modes

- Ultra-bright white (60 Lumens)
- Low power white (30 Lumens)
- Dual red (10 Lumens)
- Flashing dual red (10 Lumens)
- Requires 3x AAA batteries (not included) See pg 134



Item	Description	Price
804029	Helmet/Head Torch	£3.88

3W Head Torch



3W LED head torch with a non-slip rubberised strap

- 4 White light modes; full main beam, 50% main beam, full side lights, S.O.S. flashing
- 120 Lumens
- Upto 120 hour runtime
- Weather resistant IP6
- Requires 3x AAA batteries (not included) See pg 134



Item	Description	Price
821534	Helmet/Head Torch	£6.79

COB LED Worklamp

20W Rechargeable LED worklamp, supplied with both 240V mains charger and 12V vehicle charger

- Built-in LED lamp
- Battery lifespan: 500 times charging and discharging
- Number of switching cycles: 15,000
- Tilts up and down with 360 rotation
- Li-ion rechargeable battery
- Insulated grip handle
- Safety glass cover
- Luminous Flux: 1500lm
- Beam Angle: 120
- IP Rating: IP65
- Mains Supply: 240Vac
- Car Charger: 12V dc



Item	Description	Type	Lumen	Price
814968	Worklamp	Rechargeable	1600	£37.60

Amber Warning Light Beacon

Flashing beacon light

- Uses car 12V power



Item	Description	Type	Lead Length	Price
813616	Amber Warning Light Beacon	Rotating	4.4Mtr	£31.28

SIGN UP

TO RECEIVE PRODUCT NEWS & OFFERS VIA EMAIL

www.comtecdirect.co.uk

Site Equipment

PMR Radio

Twin pack licence-free PMR Radios, communicates with all other PMR 446 radios. Ideal for use whilst hiking or on building sites

- 8 main channels
- 121 privacy codes
- IP54 rating dust & splash proof
- Up to 968 channel combinations
- Communicates with all other PMR446 radios
- VOX Voice-activated transmission Built-in LED flashlight
- Two drop-in chargers included
- Crisp, clear and high quality sound
- 3.7V,1500mAh high quality Li-ion battery
- Squelch levels setting
- Keypad lock
- Belt clip
- No licence or service fee



Item	Description	Type	UoM	Price
827160	PMR446 Mobile Radio	Twinpack	Pair	£47.50
832821	Ear Piece & Microphone for Delta PMR Radio	-	Single	£7.89

AM845 License Free Radio Twinpack

Cobra AM845 radio twinpack with batteries and desktop charger. These radios will communicate with all other PMR446 radios with a range of up to 10 miles They have 968 channel combinations and are waterproof for outdoor use

- Up to 10km range
- Waterproof
- VOX Voice-activated transmission frees hands for other tasks
- VibrAlert® Enhanced vibrating feedback to notify you of incoming transmissions
- Built-in LED flashlight
- UHF/FM
- 8 Channels, 121 privacy codes
- >IPX2 Weather proof
- Rubberised Grips
- Scan
- 10 Call tones
- Roger Beep Tone
- Key lock
- Power saver
- Auto squelch
- LCD display
- 6xAA NiMH rechargeable batteries
- Micro-USB charging cable
- Belt clip
- No license or service fee



Item	Description	Mfr Ref	UoM	Price
832904	Mobile Radio Twinpack	AM845	Pair	£57.50

Adventure AM1035 FLT 12km Floating 2-Way Radios

Walkie talkie set with rubberised grips for enhanced grip and built-in LED flashlight to keep you on the go. VibrAlert notifies you of incoming transmissions by vibrating

- Provides extended signal range up to 12km with 968 channel combinations
- Floating
- Water resistant
- VOX - Voice activated transmission (hands free)
- VibrAlert - Enhanced vibrating feedback to notify you of incoming transmissions
- Built-in LED flashlight
- 2 Pack PMR Radios
- Height: 191mm
- Width: 61mm
- Depth: 38mm
- Rechargeable AA batteries included

INTRINSICALLY SAFE



Item	Description	Mfr Ref	UoM	Price
700111	Mobile Radio	AM1035	Pair	£84.24

RGR1 Manhole Tripod Kit

This manhole tripod rescue kit includes:

- RGR1 Rescue tripod - An aluminium cast tripod with extruded legs
- RGA4 Fall arrest block with recovery winch
- RGA4B Tripod bracket



Item	Description	Mfr Ref	Price
826696	Utility Harness	RGH11	£1309.50

RGHK1 Basic Height Safety Kit

Everything you need to work safely at height. It contains a two point safety harness and a single leg fall arrest safety lanyard

Accredited to: EN 361:2002, EN 355:2002

Kit Contains:

- RGH2 front and rear D harness
- RGL1 1.8m single leg webbing lanyard
- Shock absorber with 2 x attached RGK1 karabiners



Item	Description	Mfr Ref	Price
827460	Basic Height Safety Kit	RGHK1	£69.47

RGH2 Rescue Harness 2-Point

Two point safety harness with rear and chest mounted front attachment points. for vertical fall protection and restraint situations

- Tested and approved for a user weight up to 140kg, when used in conjunction with the BigGuy Lanyards
- Front & rear attachment points
- Rip stitch fall indicators
- Fully adjustable



Item	Description	Mfr Ref	Price
834934	Rescue Harness 2-Point	RGH2	£36.11

Site Equipment

RGHS11 Pro Safety Harness Kit

Safety equipment kit comprising of the RGH11 safety harness, the RGL11 lanyard and the RGP11 multi-purpose utility belt. Also known as BT Belt Safety 11

- Available in sizes small, standard, large and XL
- Can be supplied fitted with harness inspection labels, Scaff Microtag
- See sizing chart below



Item	Description	Fixing	Mfr Ref	Size	Price
820975	Pro Body Harness Kit	-	RGHS11/A	Size A (Small)	£222.33
820976	Pro Body Harness Kit	-	RGHS11/B	Size B (Standard)	£222.33
820977	Pro Body Harness Kit	-	RGHS11/C	Size C (Large)	£222.33
820978	Pro Body Harness Kit	-	RGHS11/D	Size D (XL)	£222.33
821070	Pro Body Harness Kit	with SCAFF Microtag	RGHS11/A*	Size A (Small)	£229.15
821071	Pro Body Harness Kit	with SCAFF Microtag	RGHS11/B*	Size B (Standard)	£228.96
821072	Pro Body Harness Kit	with SCAFF Microtag	RGHS11/C*	Size C (Large)	£229.15
821073	Pro Body Harness Kit	with SCAFF Microtag	RGHS11/D*	Size D (XL)	£229.15

RGH11 Utility Harness

RGH11 utility harness suitable for most applications

- Front and rear D's for fall arrest and rescue
- Comfort pad back support
- Work positioning side D's for hands-free working
- Webbing tails are eliminated from the front of the harness
- Curved steel leg web-ties provide fast and effective non-slip adjustment
- Specially angled 75mm wide sit strap provides added comfort
- Web material: 45mm water resistant polyester
- Fitting: High tensile steel alloy
- Accredited to EN 361:2002 & EN358:1999



Item	Description	Fixing	Mfr Ref	Size	Chest	Waist	Hips	Price
790216	Utility Harness	Front, Rear and Side D	RGH11	Small	36 - 42"	30 - 36"	38 - 44"	£105.84
820970	Utility Harness	Front, Rear and Side D	RGH11	Standard	42 - 50"	36 - 44"	44 - 52"	£105.84
820972	Utility Harness	Front, Rear and Side D	RGH11	Large	50 - 54"	44 - 48"	52 - 56"	£105.84
820973	Utility Harness	Front, Rear and Side D	RGH11	XL	54 - 58"	48 - 52"	56 - 60"	£105.84

RGL11 Kernmantle Rope Lanyard & Shock Absorber

Lanyards fitted with a standard shock absorber pack

- Made with 11 mm kernmantle rope
- Has an arrest force of <6 kN
- Accredited to EN 354:2010, EN 355:2002
- Rope has resistance to some alkalis, oil and organic solvents
- To be used when the operative is working from a static position



Item	Description	Mfr Ref	Price
820967	Kernmantle Rope Lanyard & Shock Absorber	RGL11	£123.96

RGP11 Pole Utility Strap

RGP11 multi-purpose pole strap specifically designed with a controlled release adjuster buckle to ensure safe operation and adjustment. As with the other pole straps, it should be clipped to the side D rings of a harness or work positioning belt. It can also be used individually if required. The twisted snap hook and two part triangle / karabiner ensures flat surface contact with pole whilst working

- Fully approved & extensively used by BT
- Double action safety hook on adjustable end
- Material: 43mm polyester webbing 3000Kg
- 75mm Webbing abrasion pad
- Weight 0.95kg
- Accredited to EN 358:1999



Item	Description	Fixing	Mfr Ref	Price
820966	Utility Pole Strap	Multi Purpose	RG11	£117.21

RGL2+RGK11 Kernmantle Rope Lanyard & Shock Absorber with Scaffold Hook

RGL2 lanyard using 11 mm Kernmantle rope which has machine stitched connection eyes at each end and is fitted with a standard shock absorber

- 11 mm Kernmantle rope
- Fitted with shock absorber pad
- Has an arrest force of <6 kN
- Accredited to EN 354:2010 & EN 355:2002
- Max weight 130Kg



Item	Description	Mfr Ref	Price
803027	Kernmantle Rope Lanyard & Shock Absorber	RGL2 + RGK11	£55.00

Scafftag Microtag

Scafftag Microtag solutions offer equipment tagging to improve safety in the workplace. Each tag ensures all important information is clearly displayed

- Available for scaffolding, mobile towers, ladders, podiums, steps, stools and harnesses
- Multiple colour options available



Item	Description	Type	Colour	Price
820320	Microtag	Next Inspection Date Due	Blue	£3.58
797983	Microtag	Harness Insert	Blue	£2.25
804903	Microtag	Harness Insert	Green	£2.25

EVO2 Safety Helmet



The EVO2 Comfort Plus helmet combines a super strong shell for superior all day protection in the widest range of environments, with the comfort benefits of the 3D adjustment harness system

- Tough HDPE shell. In tests the EVO2 proved far tougher than the EN397 standard required and far tougher than any of its competitors
- Supreme comfort with a 6-point polyethylene cradle harness system
- Chamlon sweatband with an Egyptian cotton core and porous PU coating for maximum sweat absorption. PH neutral and dermatologically tested
- 3D precision fitting using the unique 1-2-3 point harness depth settings
- One hand adjustment via the OneTouch slip ratchet
- Universal slots enables firm fitting of a range of Surefit safety visors and ear defenders
- Extra large area for logos on the front, sides, and rear
- Optional chinstrap available to purchase separately



Item	Description	Type	Other	Price
794824	EVO2 Safety Helmet	c/w Slip Ratchet	Vented	POA
811212	Deluxe Chinstrap with Chincup	Elasticated	-	POA

EVOLite Skyworker Safety Helmet



The EN12492 compliant EVOLite Skyworker helmet has a suspension system and shell structure designed for industrial, mountaineering, rescue and leisure activities

- Strong light shell that conforms to the mandatory shock absorption and penetration requirements of EN397 industrial standard
- E.P.S liner for side, front and rear impact protection
- 6-Point terylene comfort harness with revolution wheel ratchet and 3D adjustment
- 4-Point fully adjustable chinstrap with quick release buckle
- Universal slots enabling firm fitting of a range of Surefit safety visors and ear defenders
- Extra large area for logos on the front, sides, and rear
- CR2 reflectivity option available to provide extra safety when working in low-light conditions



Item	Description	Price
820988	EVOLite Safety Helmet	POA

Surefit Helmet Visor



Offers protection against medium energy high-speed particles at 120 m/s (270 mph), liquid droplets and molten metal

- Material - Polycarbonate
- Visor depth: 20cm
- Conforms with EN166 1.B.3.9



Item	Description	Price
820997	Replacement Visor	POA

VisiLite EVOLite LED Safety Helmet Light



Helmet mounted LED light designed for use with JSP EVOLite safety helmets. It creates an orange LED band around the circumference of the helmet

- Orange light




Item	Description	Price
820998	Safety Helmet Light	POA

Chamlon Safety Helmet Sweatband



Chamlon sweatband for EVO range of safety helmets

- Suitable for EVOLite Skyworker and EVO 2 safety helmets



Item	Description	Price
820999	Helmet Sweatband	POA

Sonis 1 Ear Defenders

Sonis 1 ear defenders are available in 2 styles, headband and helmet mounted

- Rated at SNR 27 (headband version), SNR 26 (helmet mounted version)
- Moderate industrial noise
- Green - low attenuation small cup 80-107 dB
- Can also be printed with a company logo for improved brand recognition and to discourage theft (MOQ's apply)



Item	Description	Type	Price
820991	Ear Defenders	Helmet Mounted	POA
820990	Ear Defenders	Overhead	POA

Sonis 2 Ear Defenders

The Sonis 2 Ear Defenders are headband style. Working with a leading UK acoustic engineering research facility these top specification ear defenders peak at an unbeaten 31 SNR. Suitable for use in areas where substantial industrial noise is present, these products provide the optimum cushion pressure and comfort

- Rated at SNR 31
- Suitable for substantial industrial noise
- Yellow - Medium attenuation medium cup 107-111 dB



Item	Description	Type	Price
820994	Ear Defenders	Overhead	POA

Sonis 3 Ear Defenders

The Sonis 3 Ear Defenders are available in 2 styles, headband and helmet mounted. Suitable for use in areas where extreme industrial noise is present, these products provide the optimum cushion pressure and comfort

- Rated at SNR 36 (helmet mounted), SNR 37 (overhead)
- Suitable for extreme industrial noise
- Red - High attenuation large cup 112-117dB



Item	Description	Type	Price
820996	Ear Defenders	Helmet Mounted	POA
777319	Ear Defenders	Overhead	POA

Sonis Ear Defender Hygiene Kits

Ear defender hygiene kits are a simple click to fit, keeping your ear defenders clean and extending their life. All parts are a direct replacement of the original parts

- Included in the kit:
2x replacement cushion assembly & 2x foam inserts



Item	Description	Style	Price
820992	Ear Defender Hygiene Kit	Sonis 1	POA
820993	Ear Defender Hygiene Kit	Sonis 2	POA
820995	Ear Defender Hygiene Kit	Sonis 3	POA

Economy Ear Defenders

These ear defenders are lightweight with a robust design with an adjustable headband

- Conforms to EN350



Item	Description	Price
790788	Ear Defenders SNR 24	POA

Maxifit Pro Ear Plugs

Re-useable, washable corded ear plugs supplied in a compact carry case

- Comfortable in-ear plugs
- Carry case for hygiene & storage
- Rated at SNR 26
- Conform to EN 352-2



Item	Description	Price
821012	Ear Plugs (Corded)	POA

Site Equipment

Stealth 9000 Safety Glasses



JSP stealth 9000 safety glasses are available with clear or smoked polycarbonate lens

- Extreme anti-scratch (K) & anti-mist (N) PremierShield UV lens
- Ultimate in protection, comfort and style with great sporty look
- Lightweight co-injection moulded temples with soft rubber to increase grip
- Adjustable nose piece and built in brow guard provide excellent comfort and protection levels
- Wraparound 9 base curve polycarbonate optical class 1 lens
- Conforms to EN170 2C-1.2 EN166 1.F.K.N



Item	Description	Style	Lens	Rating	Price
821008	Safety Glasses	Stealth 9000	Clear Lens	K&N Rated	POA
821009	Safety Glasses	Stealth 9000	Smoke Lens	K&N Rated	POA

EVO Safety Goggles



The EVO goggle from JSP has a spherical lens designed to offer a high degree of comfort for long periods where there is a significant risk of high speed particles striking the wearer in the eye. The goggle will resist high impact and will also protect the wearer from molten metal splash, liquid droplets and dust particles.

- ID Vent, Class 1 optics, B grade impact
- N Class lens offer anti-mist and anti-scratch to keep the lenses scratch and fog free for longer
- Tested to resist impact of a 6mm steel ball fired at 270mph (430kph)
- Also offers 99.9% protection against UV radiation
- EVA foam on the goggle housing provides a comfortable fitting to a wide range of facial profiles
- Can be used with an RX insert for prescription eyewear
- Conforms to EN166.1.B.3.4.9 and ANSI Z87.1



Item	Description	Style	Lens	Price
821010	Safety Goggles	EVO	Clear Lens	POA

Rigid Spectacles Case

A stylish zipped case for storing safety goggles

- Protective black case
- Zipped lid
- Side clip attached
- 16cm x 7cm



Item	Description	Style	Price
821011	Safety Glasses Case	Rigid	POA

Goggle Type Eyeshield

Grade 1 impact resistant lens goggles

- Suitable for spectacle wearers
- Conforms to EN 166



Item	Description	Style	Price
991019	Eyeshield Goggles	Direct Ventilation	POA

Safety Goggles

Protective goggles designed for full eye protection

- Blast, pilot or tracker styles
- 809261 and 809263 have an anti-fog and anti-scratch lens
- 809262 has a panoramic, ventilated lens



809262



809261



809263

bolle
SAFETY

Item	Description	Style	Lens	Mfr Ref	Price
809262	Safety Goggle	Blast	Clear	BLAPSI	£8.74
809261	Safety Goggle	Pilot	Clear	PILOPSI	£10.36
809263	Safety Goggle	Tracker	Clear	TRACPSI	£8.43

Safety Glasses

Comfortable, stylish, protective eyewear by Bolle

- Clear and smoke lens options
- A large variety of styles and frames



809264



809265



809268



809266



809267

bolle
SAFETY

Item	Description	Style	Lens	Mfr Ref	UoM	Price
809264	Safety Glasses	Bandido	Clear	BANCI	Each	£3.36
809268	Safety Glasses	Contour	Clear	CONTPSI	Each	£6.07
809265	Safety Glasses	Rush+	Smoke	RUSHPPSF	Each	£6.45
809266	Safety Glasses	Silium (Metal Frame)	Clear	SILPSI	Each	£7.05
809267	Safety Glasses	Silium+	Smoke	SILPPSF	Each	£7.82

B-Clean Cleaning Products

Lens cleaner and wipes by Bolle to help keep your glasses clean and in good condition

- Alcohol and silicone free
- Anti-reflective and anti-static



bolle
SAFETY

Item	Description	Style	Mfr Ref	UoM	Price
809276	Cleaning Wipes	B-Clean	B100	Box of 100	£6.31
809277	Lens Cleaner 50ml	B-Clean	B412	Each	£2.59

Prescription Safety Glasses

Safety glasses with an all-inclusive prescription pack

- Take the pack to your local Boots optician (It includes everything you need)
- Choose your frame (17 styles to pick from)
- Your optician will order them and tell you when they are ready
- All-inclusive price - includes any standard prescription frame, lenses (all powers up to +/-8) and opticians dispensing fee
- Single vision or varifocal lenses (any power up to +/-8)
- Polycarbonate lenses with Bolle Safety's unique Platinum double sided anti-scratch and anti-fog coating
- Tested and approved to EN166/170 1F K&N



bolle
SAFETY

Item	Description	Style	Lens	Mfr Ref	Price
810220	Safety Glasses	All-Inclusive Prescription	Made to Order	RXPACK	POA

Site Equipment

Force 8 Half-Mask Respirator



The Force 8 half-mask respirator from JSP features a twin cartridge TYPHOON valve system which offers superior low breathing resistance and a 4-point suspension harness with quick release buckles. The mask accepts the full range of low profile Force 8 filters, providing protection against particulates, many gases and vapours

- Available in three sizes for a superior fit to most face shapes
- 4-Point suspension harness with quick release buckles
- Low resistance exhalation valve for easy breathing with stable mask configuration.

Made from silicone it performs well at very low temperatures

- Accepts the full range of low profile Force 8 filters



Item	Description	Type	Supplied	Size	Price
821000	Half-Mask Respirator	Force 8	Ready Fitted with PressToCheck P3 Filters	-	POA
821002	Half-Mask Respirator	Force 8	Mask Only	Small	POA
821003	Half-Mask Respirator	Force 8	Mask Only	Medium	POA
821001	Half-Mask Respirator	Force 8	Mask Only	Large	POA
821005	Respirator Dust Filters Pk of 2	Force 8	-	-	POA
821004	Belt Bag (Holds Mask & Filters)	Force 8	-	-	POA

FFP2 Fold Flast Dust Mask



Vertical fold flat respirator with foam padded adjustable nose clip and extended chin coverage

- Packaged individually
- Toggle adjuster on each strap for an effective fit
- Conforms to EN 149
- FFP2 - 94% minimum filtration efficiency



Item	Description	Protection	Type	Price
833953	Disposable face mask	FFP2	Fold Flat	POA

FFP2V Valved Fold Flat Dust Mask



Valved fold flat face masks with foam padded adjustable nose clip, extended chin coverage and exhalation valve

- Conforms to EN149
- FFP2 - 94% minimum filtration efficiency
- Packaged individually



Item	Descrip-	Protection	Type	UoM	Price
788537	Dust Mask	FFP2V	Fold Flat	Pk 30	POA

FFP3V Typhoon Valved Dust Masks



JSP Typhoon dust masks with a unique overflow technology offering superior minimum breathing resistance

- Foam area around the inside of the mask provides a perfect fit
- Welded nose piece prevents irritation
- Adjustable strap fitting comfortably to all head sizes and shapes
- Perfect for low risk hazards where an assigned protection factor up to 4 is required
- Standards EN149:2001 and A1:2009
- Individually packed for hygiene



Item	Description	Protection	Type	Price
821006	Dust Mask	FFP3V	Fold Flat	POA
821007	Dust Mask	FFP3V	Moulded	POA

FFP3 Valved Facemasks

FFPE Valved cupped facemasks offer great levels of respiratory protection

- CE Certified to EN 149:2001+A1:2009
Filter efficiency level greater than 99% (FFP3)
- Category III
- Latex free elasticated head strap
- Adjustable nose bridge and soft nose seal for improved fit
- Valved to avoid heat build-up for greater comfort



Item	Description	Protection	Type	UoM	Price
816925	Dust Mask	FFP3	Fold Flat	Pk 10	£14.33

Single Use Latex Gloves

Single use, disposable latex gloves for resistance to solvents and compounds

- Non sterile
- Use on either hand



Item	Description	Type	Size	UoM	Price
794489	Latex Gloves	Lightly Powdered	Small	Pk of 100	POA
794488	Latex Gloves	Lightly Powdered	Medium	Pk of 100	POA
774228	Latex Gloves	Lightly Powdered	Large	Pk of 100	POA
824051	Latex Gloves	Lightly Powdered	XL	Pk of 100	POA
794492	Latex Gloves	Powder Free	Small	Pk of 100	POA
794491	Latex Gloves	Powder Free	Medium	Pk of 100	POA
794490	Latex Gloves	Powder Free	Large	Pk of 100	POA
795013	Latex Gloves	Powder Free	XL	Pk of 100	POA

Disposable Nitrile Gloves

Powder free disposable nitrile gloves offer protection against contamination, dirt and potential irritants in low risk situations

- Latex free reducing the risk of hypersensitivity and allergic reactions
- Single Use



Item	Description	Type	Size	UoM	Price
794495	Nitrile Gloves	Powder Free	Small	Pk of 100	POA
794494	Nitrile Gloves	Powder Free	Medium	Pk of 100	POA
794493	Nitrile Gloves	Powder Free	Large	Pk of 100	POA
807889	Nitrile Gloves	Powder Free	XL	Pk of 100	POA

Rigger Gloves

Nitrile coated gloves with Kevlar and polycotton mixed liner

- Chrome leather palm
- Cotton back



Item	Description	Size	UoM	Price
823827	Rigger Gloves Leather	Large	Pair	£1.23
823703	Rigger Gloves Fleece Lined	XL	Pair	£3.40

Cut Resistant Gloves



A range of gloves designed to minimise cuts during work tasks or while handling potential sharp materials such as rough metal work

- Red - ANSI level A1
- Amber - ANSI level A2
- Green - ANSI level A4
- CE certified
- Palm dipped to increase dexterity and ventilation
- 100% breathable seamless liner
- 13 gauge liner for a perfect fit



Item	Description	Size	Colour	UoM	Price
823828	Cut Level 1 Gloves	Large	Red	Pair	£1.03
823829	Cut Level 3 Gloves	Large	Amber	Pair	£3.39
823830	Cut Level 5 Gloves	Large	Green	Pair	£4.14

Site Equipment

Topaz Handling Gloves



Topaz gloves feature a polycotton shell teamed with a textured latex palm

- Conforms to EN 388 levels 2-2-4-2
- Polycotton glove
- Latex palm
- Textured grip
- Ribbed knit wrist
- Enhanced tear resistance
- Suitable for baggage handling, construction, disposal operations, gardening, general handling, general maintenance



Item	Description	Size	UoM	Price
300035	Topaz Handling Gloves	Large	Pair	£1.34

Gripper Gloves



Knitted cotton gloves with criss-cross non-slip grip

- Elasticated wrists
- Size large (fits most hands)



Item	Description	UoM	Price
784737	Yellow Gripper Gloves	Pair	£1.00

Cut Resistant Safety Gloves



Safety gloves with high cut resistance, perfect for fibre engineers

- Available in size 9 (Large) & size 10 (XL)
- Rated 4.X.4.4.C (Cut resistant level 5)
- EN388:2016



Item	Description	Size	UoM	Price
829196	Cut Resistant Gloves	9/L	Pair	£3.30
829197	Cut Resistant Gloves	10/XL	Pair	£3.30

Anti-Slip Gloves



Anti-slip gloves designed to European Standard EN388, directive 89/686 / EEC. This glove is recommended during construction and for assembly tasks. CAUTION : Not suitable for hygienic or medical use.

- Category: 2
- Standard: European EN388
- Abrasion resistance: 2
- Cut resistance: 1
- Tear resistance: 3
- Puncture resistance: 1



Item	Description	Size	UoM	Price
829198	Anti Slip Gloves	9/L	Pair	£1.18
829199	Anti Slip Gloves	10/XL	Pair	£1.18

Premium Protective Gloves



General purpose protective gloves are reinforced and give excellent dexterity to the user. Suitable for multiple disciplines, including glass handling operations, sanitation, general maintenance, woodworking, handling of small sharp parts, waste treatment and recycling, transport and storage, construction

- Category : 2
- Standard : European EN388 / EN420
- Abrasion resistance : 4
- Cut resistance : 4
- Tear resistance : 4
- Puncture resistance : 3
- TDM cut resistance : C
- Joint impact protection : Yes
- KCI pH-Textile Solution : Yes



Item	Description	Size	UoM	Price
832902	Protective Gloves	9/L	Pair	£7.94
832903	Protective Gloves	10/XL	Pair	£7.94

FREE
NEXT DAY DELIVERY
ON ORDERS OVER £200

Nitrile Coated Gloves

Nitrile coated gloves with Kevlar and polycotton mixed liner

- Combines excellent grip with high abrasion, chemical and cut resistance
- Ideal for handling small, sharp and pointed objects or parts
- One size fits all



Item	Description	UoM	Price
784894	Nitrile Gloves	Pair	£6.42

Nylon Gloves

Nylon glove coated with nitrile

- Suitable for assembly work and handling small/delicate machine parts
- Very dextrous, ideal for technicians
- One size fits all



Item	Description	UoM	Price
784895	Nylon Gloves	Pair	£1.85

PVC Gloves

Waterproof PVC gloves with cotton reinforcing and elasticised wrist

- One size fits all



Item	Description	Type	UoM	Price
991021	PVC Gloves	Knitted Wrist Band	Pair	£1.98

Insulated Gloves

Insulated gloves offering voltage protection

- IR gloves, Class 1
- Protection up to 10,000V
- Available in various sizes



Item	Description	Size	Length	UoM	Price
823783	Insulated Gloves	8	36cm	Pair	£35.00
823782	Insulated Gloves	9	36cm	Pair	£35.00
823781	Insulated Gloves	10	36cm	Pair	£35.00

Knitted Gloves



Knitted gloves ideal for outside work and keeping fingers and hands warm during cold weather. Can be worn under other gloves for added warmth and comfort

- Acrylic knit outer material
- Hardwearing
- Soft inner Insulatex lining gives warmth and support
- Knit gauge 9 for shape retention
- Knitted cuff for comfort and warmth



Item	Description	Type	UoM	Price
823831	Knitted Insulatex Gloves	Fingerless	Pair	£3.22

Insulated Lined Beanie Hat



High-performance cold-weather hat with an insulated microfibre lining for extra warmth retention

- One size fits all
- Windproof fine-knit acrylic fabric



Item	Description	Price
823832	Insulated Lined Beanie Hat	£3.33

Site Equipment

Bi-Fold Kneeling Mat

A jointers and service engineers kneeling mat

- Can be folded for double cushion protection
- Lightweight and foldable compact design
- Resistant to most oils and chemicals



Item	Description	Price
823702	Bi-Fold Kneeling Mat	£7.36

Kneeling Pad



Handy polyfoam kneeling pad to provide improved comfort whilst kneeling either indoors or outdoors

- Quick fix knee protection
- Hard wearing
- Reduces knee and back strain
- Integral carry handle
- Dimensions 18.5cm W x 2cm D x 40cm L



Item	Description	Mfr Ref	Price
789893	Kneeling Pad	KP05	£5.77

Knee Pad Inserts

Pressed foam knee pad inserts designed for use with work trousers and coveralls

- Help to reduce the pressure/strain on the knees
- Supplied in pairs



Item	Description	UoM	Price
794497	Lightweight Knee Pad Inserts	Pair	£4.00

Lightweight Knee Pads

Lightweight moulded kneepad with ribbed kneeling surface

- Coolmax lining wicks away moisture



Item	Description	UoM	Price
782663	Lightweight Knee Pads	Pair	£4.75

Lightweight Kneepads



Lightweight knee pads designed to wrap around the knee

- CE certified
- Breathable inner fabric allows air to circulate
- Lightweight wrap-around design
- Adjustable straps for secure and comfort fit
- Hard wearing outer shell



Item	Description	UoM	Price
824093	Lightweight Knee Pads	Pair	£5.71

Disposable Overshoes

Basic poly disposable overshoe with an elasticised top

- Available in a standard or non-slip version
- Expandable fit suitable for most shoes sizes



Item	Description	UoM	Price
782665	Disposable Overshoes	Pk of 100	£3.04
794496	Disposable Non-Slip Overshoes	Pk of 50	£8.56

The Original CleanBoot Reusable Overshoe

Fits over your existing dirty boots or shoes, allowing you to keep the outside out and the inside clean

- Convenient heel loop for easy ON/OFF application
- Reinforces the heel seam for additional protection against wear & tear
- Form fitting, durable construction, 100% neoprene
- Patented extra-grippy sole



Item	Description	Size	Price
834577	Reusable Overshoe	UK 5-7	£18.89
834578	Reusable Overshoe	UK 7-9	£18.89
814953	Reusable Overshoe	UK 9-11	£18.89
834579	Reusable Overshoe	UK 11-14	£18.89

Hi-Vis Waistcoats

Simple 2 band and brace high visibility vests with Class 2 hi-viz protection

- Available in orange or yellow
- Conforms to EN471 C2
- 100% polyester fabric
- Black Binding
- Fastening: Velcro



Item	Colour	Size	Measurements	Price
784916	Yellow	Medium	100-104cm	£2.09
784917	Yellow	Large	108-112cm	£2.09
784918	Yellow	XL	116-122cm	£2.09
822151	Orange	Medium	100-104cm	£1.91
822152	Orange	Large	108-112cm	£1.91
822153	Orange	XL	116-122cm	£1.91

Hi-Vis Long Sleeve Waistcoats

Lightweight hi-viz long sleeve waistcoat offering maximum Class 3 hi-visibility protection

- Conforms to EN ISO 20471 Class 3
- 100% polyester fabric
- Black Binding

Other colours available



Item	Colour	Size	Measurements	Price
824125	Yellow	Medium	100-104cm	£3.54
800607	Yellow	Large	108-112cm	£3.54
800608	Yellow	XL	116-122cm	£3.65

Hi-Vis Jackets

Polyester 2-tone PU coated jacket

- Stitched and taped waterproof seams
- Quilted lining
- Fold-away hood and heavy duty 2-way zip
- Conforms to EN471 Class 2



Item	Colour	Size	Measurements	Price
803588	Yellow/Navy	Medium	92-100cm	£17.95
788535	Yellow/Navy	Large	100-108cm	£17.95
788536	Yellow/Navy	XL	108-116cm	£17.95
822160	Orange/Navy	Medium	92-100cm	£19.80
822161	Orange/Navy	Large	100-108cm	£19.80
822162	Orange/Navy	XL	108-116cm	£19.80

Site Equipment

Hi-Vis Trousers

Hi-viz trousers with an elasticated waist

- Available in orange or yellow
- Elasticated waistband
- Trousers protect both you and your clothes from the elements
- Bagless pockets for inner garment access
- Conforms to EN ISO 20471
- Conforms to EN 343 Class 3:1
- Conforms to GO/RT 3279

Item	Colour	Size	Price
822154	Yellow	Medium	£9.43
822155	Yellow	Large	£9.43
822156	Yellow	XL	£9.43
816741	Orange	Medium	£9.24
816742	Orange	Large	£9.24
816743	Orange	XL	£9.24



Polycotton Boilersuits

Polycotton basic coveralls with a generous fit so they can be worn over additional layers of clothing - ideal for top to toe general purpose protection

- Polyester/cotton fabric
- Popper front opening
- 2x chest pockets
- 2x side pockets & 1x back pocket
- Hammer loop & ruler pocket
- Partially elasticated waistband

Item	Colour	Size	Price
822158	Blue	Medium	£14.34
817764	Blue	Large	£14.34
822159	Blue	XL	£14.34



TALK TO US ABOUT CABLE DRUM TRAILERS & WINCHES



CONTACT OUR SALES TEAM TO FIND OUT MORE

External Cabling

- 176 – 178 Continuous Duct Rods & Accessories
 - 179 Coiled Duct Rod
 - 179 PVC Duct Rod
- 180 – 181 Duct Rod Attachments
 - 181 Swivel Connectors & Shear Pins
 - 181 Pulling Eyes
 - 182 Cable Grips
- 183 – 184 Rod Sets
 - 184 Fish Tape
- 185 – 189 Manholes, Chambers & Furniture
- 190 – 191 Hydraulic Lifters & Accessories
- 192 – 194 Lifting Keys
- 195 – 199 PVC Duct & Accessories
 - 199 Duct Motor & Bag Grips
- 200 – 201 Duct Seals
 - 202 CAT & Genny
 - 203 Cable Guides
 - 203 Drawropes & Braids
- 205 – 207 Rupotec Cable Dispenser & Install Accessories
- 208 – 210 Cable Dispensers, Stands & Drum Sets
 - 211 Install Accessories
- 212 – 213 Pole Lifting & Handling
 - 214 Tensioning Straps & Lifting Slings
- 215 – 227 Pole & Overhead Furniture
 - 227 Punch Sets
- 229 – 231 Connectorised Block Terminals (CBT) & Drop Cables
- 232 – 237 Fibre Optic Closures & Accessories
 - 238 Cable Entry Solutions & Covers
- 239 – 242 Sealants, Resins & Adhesives



175

External Cabling

ETC Continuous Duct Rod

Commonly referred to as Cobras, these high quality glass fibre reinforced helically wound epoxy rod giving good adhesion properties for the outer polyethylene coating. This construction gives excellent bending elasticity which makes it ideal for short to long installations into ducts.

- Continuous rod on a free standing frame, featuring guide rings and reel brake
- Zinc plate finish
- Rod comes complete with guide tips
- 4.5mm rod supplied on 40cm x 25cm x 50cm frame with M5 male thread & both bullet and flexible tips

Item	Description	Rod Size	Length	Price
829056	Duct Rod	4.5mm	60Mtr	£118.40
834899	Duct Rod	4.5mm	80Mtr	£131.45
834902	Duct Rod	4.5mm	100Mtr	£149.85



Continuous Duct Rods

High quality glass fibre reinforced helically wound epoxy rod giving good adhesion properties for the outer polyethylene coating. This construction gives excellent bending elasticity which makes it ideal for short to long installations into ducts. It is an ideal and fast way of installing draw ropes and winch ropes into ducts, ready for cable pulling operations

- Continuous rod on a free standing frame, featuring guide rings and reel brake
- Zinc plate finish
- Rod comes complete with guide tips
- 6mm rod supplied on 52cm x 26cm x 57cm frame
- 9mm rod supplied on 92cm x 46cm x 103cm frame
- 11mm rod supplied on 115cm x 52cm x 105cm frame
- 14mm rod supplied on 127cm x 52cm x 130cm frame



Item	Description	Rod Size	Length	Price
993479	Duct Rod	6mm	60Mtr	£152.88
993990	Duct Rod	6mm	80Mtr	£162.12
791024	Duct Rod	6mm	90Mtr	£166.06
700257	Duct Rod	6mm	100Mtr	£170.49
794403	Duct Rod	6mm	120Mtr	£179.67
799035	Duct Rod	9mm	60Mtr	£251.69
794404	Duct Rod	9mm	100Mtr	£288.41
992182	Duct Rod	9mm	120Mtr	£306.10
794405	Duct Rod	9mm	150Mtr	£334.67
794406	Duct Rod	9mm	200Mtr	£380.92

Item	Description	Rod Size	Length	Price
794407	Duct Rod	11mm	100Mtr	£353.71
794408	Duct Rod	11mm	150Mtr	£415.28
992156	Duct Rod	11mm	200Mtr	£465.24
992183	Duct Rod	11mm	250Mtr	£546.06
790544	Duct Rod	11mm	300Mtr	£619.00
794409	Duct Rod	14mm	150Mtr	£595.87
794410	Duct Rod	14mm	200Mtr	£695.18
794411	Duct Rod	14mm	250Mtr	£782.25
794412	Duct Rod	14mm	300Mtr	£891.08
794413	Duct Rod	14mm	350Mtr	£990.39

Duct Rod Pusher & Hydraulic Power Pack

The duct rod pushers are designed to assist in rodding operations

- Spring loaded self-centring fail safe operating lever
- Duct rod pusher used in conjunction with hydraulic power pack (797743)
- Measuring counter with reset lever
- Anti crush control to prevent damage to rod
- For use with duct rods upto 14mm
- Weight 53kg



Item	Description	Price
825579	Duct Rod Pusher	POA
797743	Hydraulic Power Pack	POA

Duct Rod Repair Kits

Duct rod repair kit to repair breakage's to conduit rod. The fitting is used with ADH1 adhesive which is included in the kit



1 Rod & Glue
Included In Kit

Item	Description	Rod Size	Price
817889	Duct Rod Repair Adhesive	-	£5.49
794853	Duct Rod Repair Kit	4.5mm	£10.74
794854	Duct Rod Repair Kit	6mm	£10.33
992795	Duct Rod Repair Kit	9mm	£12.25
992750	Duct Rod Repair Kit	11mm	£13.90
828905	Duct Rod Repair Kit	14mm	£14.15

NEED ASSISTANCE?

01480 415414 (Head Office)

0141 564 1234 (Glasgow)



External
Cabling

External Cabling

Flexible Duct Leaders

Spring type flexible leader for use with 9mm and 11mm continuous rods



Item	Description	Price
803622	Flexible Guide Tip Wire Rope	£43.39
992471	Flexible Guide Tip with Spring	£14.78
803621	Flexible Leader Rod	£30.05

Duct Rod Guided Tips

Duct rod guided tips to guide the rod through the duct. The eye allows pulling rope to be attached to the rod

- Suitable for 6mm, 9mm, 11mm & 14mm duct rod



Item	Description	For Rod Dia.	Price
993156	Bullet Style Tip	6mm Rods	£8.95
795476	Bullet Style Tip	9/11/14mm Rods	£9.95
993157	Bullet Style Tip	9/11/14mm Rods	£10.16
794855	Ball Style Tip	9/11/14mm Rods	£5.03

Duct Rod U-Shackle

U-shackle for use with duct rod guided tips when a larger pulling eye is required

- Suitable for 9mm, 11mm & 14mm duct rod



Item	Description	Price
794856	Duct Rod U-Shackle	£14.57

Brass End Fittings

DUCT ROD REPAIR ADHESIVE 817889

Replacement end fittings for use with continuous duct rod. Threaded end allows the connection of other rod accessories



Item	Description	Rod Size	Male Thd	Price
794851	Duct Rod Brass End Fitting	4.5mm	M6	£4.81
794852	Duct Rod Brass End Fitting	6mm	M6	£4.85
990088	Duct Rod Brass End Fitting	9mm	M12	£4.90
990094	Duct Rod Brass End Fitting	11mm	M12	£7.47
800903	Duct Rod Brass End Fitting	14mm	M12	£13.16

Duct Rod Swivel Connector

Used to extend single rod when the rod is not long enough for the duct length that is being rodded

- Enables two rods to be screwed together
- Suitable for use with 9mm, 11mm & 14mm rod
- An ideal accessory to have in the van



Item	Description	Mfr Ref	Price
824193	Swivel Connector	M342/4	£14.55

Rod Sweep Plier

Pliers for assembling and disassembling sweeping rods used in cleaning cable ducting



Item	Description	Price
821822	Rod Sweep Plier	£30.04

BT Coiled Duct Rod

- Also known as BT Duct Rod 3
- Please note, these can be supplied in black or yellow



Item	Description	Diameter	Length	Price
794789	Duct Rod No.3	15/16"	250Mtr	£433.19

BT PVC Duct Rods

BEST SELLER

Rigid PVC duct rods available in 2m and 3m with ferret latch mechanism

- The joint is commonly known as the ferret type which operates on the principles of a spring loaded pin engaging into a mating hole



Item	Description	Diameter	Length	Price
991963	Duct Rod 1	15/16"	3Mtr	£18.92
200154	Duct Rod 2	15/16"	2Mtr	£17.16
991964	Duct Rod 5	1/2"	2Mtr	£11.77

External Cabling

Duct Rod Coupling Up Pieces

Commonly known as 2 part Marring Set, used for joining duct rods within the duct



Item	Description	Size	Diameter	Price
200127	BT Coupling 1	Small	13/8"	£48.49
991965	BT Coupling 2	Medium	17/8"	£50.00

BT Rod Attachment 1A

A rod leader and follower with a male thread for use on the female end of Rod Duct 5

- Also known as BT Attachment Rod 1A
- Used in cable and draw rope pulling



Item	Description	Diameter	Price
992274	Attachment Rod 1A	1/2"	£8.95

BT Rod Attachment 2A

A leader and follower with a female thread for joining to the male end of Rod Duct 5

- Also known as BT Attachment Rod 2A



Item	Description	Diameter	Price
992275	Attachment Rod 2A	1/2"	£10.74

BT Rod Attachment 3A

Leader or follower for duct rod no. 3. Can be used with rod duct 5 as a rod leader. It incorporates a spring for rodding through tee couplings

- Also known as BT Attachment Rod 3A



Item	Description	Style	Diameter	Price
794794	Attachment Rod	Spring Type	1/2"	£10.24

BT Rod Attachment 4A

Leader or follower to 15/16" ferret rod. Used with rod duct 3 as a leader or when used with adaptor rod 2A or 3A as a leader or follower with rod duct 1 or 2

- Also known as BT Attachment Rod 4A



Item	Description	Style	Diameter	Price
991968	Attachment Rod 4A	Female	15/16"	£3.86

Duct Grip Couplings

Grip couplings are designed to assist the threading of sub ducts by stiffening the leading end. They comprise of BT couplings with 3 metre long glass fibre rods which screw into the sub duct

- Grip Coupling 1A designed to thread 25mm diameter sub duct



Item	Description	BT Ref	Length	Price
822057	Grip Coupling	1A	3Mtr	£51.50

BT Duct Rod Adaptors

A selection of rod adaptors for use with BT duct rods

- Also known as BT Adaptor Rod 1A, 2A, 3A, 5 and 7 respectively



Item	Description	Type	Fitting	Diameter	Price
794498	Duct Rod Adaptor	No.1A	Ferret Female to Rod Duct No.3 Male	15/16"	£12.47
200008	Duct Rod Adaptor	No.2A	Ferret Male to Duct Rod No. 3 Female	15/16"	£19.44
792602	Duct Rod Adaptor	No.3A	Ferret Female to Duct Rod No. 3 Female	15/16"	£12.59
992315	Duct Rod Adaptor	No.5	Ferret Female to Lockfast Female	1/2"	£18.89
200009	Duct Rod Adaptor	No.7	Ferret Male to Ferret Female	15/16"	£12.21

BT Rod Duct No.3 Couplings

A selection of coupling pieces for use with BT Duct Rod No.3

Item	Description	Style	Price
794792	Duct Rod No.3 Coupling	Female	£11.01
794790	Duct Rod No.3 Coupling	Male	£6.31
794791	Duct Rod No.3 Coupling	Male Swivel	£11.81
794793	Duct Rod No.3 Coupling	Reel	£11.25



Fused Swivel Connectors

16mm or 22mm swivel connectors (shear pins are purchased separately)

- 16mm Shear pin breaking loads available 0.9kN to 3kN
- 22mm Shear pin breaking loads available 2kN to 8kN

Item	Style	Diameter	Price
991768	Fused	16mm	£118.11
992001	Fused	22mm	£56.58



Swivel Connectors

Available in 22mm and 32mm diameter

Item	Style	Diameter	Price
993150	Non-Fused	22mm	£138.38
991033	Non-Fused	23mm	£88.65



Shear Pins (Fuses)

Shear pins are designed for use with fused swivel connectors to break under the loads indicated



Item	Load	For Use with	Colour	UoM	Price
992188	0.9kN	16mm Swivel Fuse	White	Pk of 10	£42.92
991775	1.5kN	16mm Swivel Fuse	Red	Pk of 10	£42.92
797013	2kN	16mm Swivel Fuse	Blue	Pk of 10	£42.92
797014	2.6kN	16mm Swivel Fuse	Orange	Pk of 10	£42.92
797015	3kN	16mm Swivel Fuse	Black	Pk of 10	£42.92
996341	2kN	22mm Swivel Fuse	-	Pk of 10	£29.10
996342	3kN	22mm Swivel Fuse	-	Pk of 10	£28.80
996343	4kN	22mm Swivel Fuse	-	Pk of 10	£29.10
996344	6kN	22mm Swivel Fuse	-	Pk of 10	£29.10
996345	8kN	22mm Swivel Fuse	-	Pk of 10	£29.10

Duct Pulling Eyes

- Pulling eye lug - sub duct with lug end fitting for direct use with connector swivel
- Pulling eye clevis - tapered, threaded sub duct pulling eyes (carrots) with clevis end (requires cabling link for use with connector swivel)



Item	Description	Type	Style	For Duct	Price
830289	Duct Pulling Eye	Lug	Duct	14mm-24mm	£55.00
993986	Duct Pulling Eye	Lug	Duct	24mm-29mm	£41.95
992434	Duct Pulling Eye	Clevis	Duct	24mm-29mm	£51.90
833183	Duct Pulling Eye	Clevis	Duct	29mm - 37mm	£69.84
992491	Duct Pulling Eye	Clevis	Duct	32mm-36.5mm	£62.66

External Cabling

Cable Grips (Single Eye)

Standard steel cable sock with single eye for cable pulling

- Open down one side for wrapping around cable
- Supplied with closing strand



Item	Description	Style	Type	Cable Dia	Price
990249	Cable Pulling Grip	Single Weave	Single Eye	6mm-13mm	POA
992009	Cable Pulling Grip	Single Weave	Single Eye	13mm-19mm	POA
992007	Cable Pulling Grip	Single Weave	Single Eye	19mm-25mm	POA
992006	Cable Pulling Grip	Single Weave	Single Eye	25mm-38mm	POA
992005	Cable Pulling Grip	Double Weave	Single Eye	38mm-51mm	POA
992004	Cable Pulling Grip	Double Weave	Single Eye	51mm-63mm	POA
992008	Cable Pulling Grip	Double Weave	Single Eye	63mm-76mm	POA

Cable Grips (Double Eye)

Steel cable sock with double eye

- Neck is open for fleeting applications



Item	Description	Style	Type	Cable Dia	Price
992003	Cable Pulling Grip	Single Weave	Double Eye	19mm-25mm	POA
991994	Cable Pulling Grip	Double Weave	Double Eye	51mm-63mm	POA
990041	Cable Pulling Grip	Double Weave	Double Eye	63mm-76mm	POA

Cable Grips Double Eye (Soft Loop)

Cable grips used to aid the recovery of underground cables

- Available in a variety of sizes
- Double weave and double eye
- Also known as BT Grip Cable Recovery 1-4



Item	Description	Style	Type	Cable Dia	Price
200031	Cable Pulling Grip	Double Weave	Double Eye	31-44mm	POA
200087	Cable Pulling Grip	Double Weave	Double Eye	44-57mm	POA
200088	Cable Pulling Grip	Double Weave	Double Eye	57-70mm	POA
200089	Cable Pulling Grip	Double Weave	Double Eye	70-82mm	POA

Split Cable Pulling Grips

Split steel cable sock with single eye

- Open down one side for wrapping around cable
- Supplied with closing strand



Item	Description	Style	Type	Cable Dia	Price
991997	Cable Pulling Grip	Split Grip	Single Eye	38mm-51mm	POA

Universal Drain Rod Set

Drain rod set includes 30 feet of the finest blue rods with varying tool options. An essential product for the builder, plumber, chimney sweep or handyman

- 1x Blue carry bag
- 10x 3ft x 3/4" Blue Rods
- 1x 4" Plunger
- 1x 4" Drop scraper
- 1x Double worm screw



Item	Description	Price
808379	Universal Drain Rod Set	£32.89

Deluxe Cable Scout & Rod Set

A professional cable routing tool that allows the installer to easily route cables and save time

- High quality glass reinforced plastic
- Save time even on challenging jobs
- Load capacity: 200Kg




Item	Man. Code	Description	Length	Price
808366	CS-SD 897-90001	Cable Scout Rod Set	10Mtr	£79.82

Cable Scout Rods & Accessories

Rods and accessories for the HellermannTyton Cable Scout

- Cable Scout+ is supplied with a range of useful standard accessories. Additional accessories can be purchased separately. Cable grips are designed to grip objects and provide reliable and time saving method of securing cables & pipes to the rods. Just open the grip by compressing the braid, push the grip over the cable or pipe and release the grip, which will contract and establish a tight grip on the cable or pipe to the rod set



Item	Man. Code	Description	Type	Colour	Length	Price
819025	897-90003	Cable Scout Rod Set	Handy	-	1.6Mtr	£19.34
808362	897-90018	Cable Scout Attachment	Whisk	Black	195mm	£14.05
819023	897-90019	Cable Scout Attachment	Whisk	White	340mm	£14.15

Super Rod Standard Rod Set

Entry level set of rods for awkward areas

- Kit contains;
- 10 x 4mm x 1 Mtr rods
- 1 x mini eye
- 1 x mini hook
- 1 x 130mm flexi lead



Item	Description	Length	Price
782009	Cable Rod	10Mtr	£29.61

External Cabling

Super Six Set

Cable rod set for restricted areas, contains 6Mtrs of rod in 3 flexibilities

- Kit contains;
- 3 x 5mm x 1 Mtr rods
- 2 x 4mm x 1 Mtr rods
- 1 x 6mm x 1 Mtr rod
- 1 x flexi lead
- 6 assorted end fittings



Item	Description	Length	Price
782010	Cable Rod	6Mtr	£63.29

Polymer Rod Set

Small polymer set of non-conductive cable rods for ultra restricted areas

- Kit contains;
- 4 x 330mm Rods
- 3 x End fittings




Item	Description	Length	Price
782012	Cable Rod	1.32Mtr	£15.28

PVC Duct Rod Kit

Set of glass-reinforced polyester rods for gaining access to wire and cables under floorboards, in ceiling ducts, trunking and wall cavities

- Kit contains;
- 10 x 1 Mtr rods
- 1 x Hook end
- 1 x Ring end
- 1 x Flexi extender

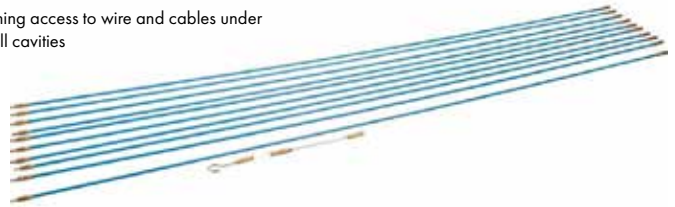

Item	Description	Type	Length	Price
783976	Cable Rod	Cable Access Kit	10Mtr	£15.48

Electricians Draw Tape (Fish Tape Reel)

Smooth reeling, sprung-steel electricians fish tape for easy cable and wire threading through conduit, walls or under floors

- Flexible spring steel with eyed end
- Side handle with brake



Item	Description	Type	Length	Price
784796	Electricians Draw Tape	Fish Tape Reel	15Mtr	£13.16

STAKKAbox External Chamber Sections & Covers

STAKKAbox is the only modular access chamber approved for use on Openreach networks. Complete chambers can be constructed from excavation to reinstatement in little more than one hour




Image shows multiple units stacked together
1 unit = 1 stackable layer



Video Online



Item	Description	Cover Size	Material	Mfr Ref	Width	Depth	Length	Price
809960	Chamber System	EN4	HDPE	JMF 104	445mm	150mm	915mm	£89.93
809962	Chamber System	EN6	HDPE	JMF 106	610mm	150mm	1310mm	£138.49
809290	Cover & Frame (Unbranded)	EN4	Concrete/Steel	-	445mm	-	915mm	£145.50
809578	Cover & Frame (Unbranded)	EN6	Concrete/Steel	-	610mm	-	1310mm	£232.80

Joint Boxes & Covers

Underground jointing enclosures offering significant advantages over the more traditional methods of forming a jointing enclosure. Light in weight yet immensely strong and rigid having no seams or welds, they are rot proof and will not support microbiological growth.

Typical uses include:- Telephone connection systems, connection of lighting standards to mains, traffic light connections, underground water metre housing, cable television connections, loop connections and cable communications

- Joint box chambers moulded from glass fibre reinforced polyester moulding compounds
- Manufactured under a system of rigidly applied quality control to ensure optimum, fully cured mouldings
- Made to ensure trouble free installations
- Available for installation in driveways, paths etc
- Joint boxes and covers sold separately
- Joint Box Cover 23 made from ductile iron
- Joint Box Cover 26 made from steel with infilled concrete
- Cover supplied with BT logo
- Class B125
- For footway areas only



992102



Ductile Iron



Steel/Concrete



990682

Item	Description	BT Ref	Width	Depth	Length	Price
992102	Joint Box	No.23	277mm	482mm	512mm	£43.68
992103	Joint Box Cover (No Badge) Ductile Iron	No.23	-	-	-	£52.38
990682	Joint Box	No.26	720mm	200mm	570mm	£78.71
992455	Joint Box Cover (BT Logo) Steel/Concrete	No.26	-	-	-	£102.20

External Cabling

MOBRA Chamber Mounting Brackets & Accessories

MOBRA chamber mounting brackets and accessories for use with joints and termination boxes within cable chambers.

- No-drill MOBRA in three sizes to suit standard joint boxes and cables types
- Pivot arms available in two sizes
- Corner brackets for use in modular boxes



Item	Description	Type	Height	Width	Length	UoM	Price
822383	MOBRA Chamber Bracket	No-Drill JUF/2	-	220-300mm	-	Each	POA
822382	MOBRA Chamber Bracket	No-Drill JUF/4-6	-	410-620mm	-	Each	POA
822381	MOBRA Chamber Bracket	No-Drill JUF/10	-	660-850mm	-	Each	POA
822385	MOBRA Chamber Bracket Pivot Arm	For JUF/2 (Medium)	450mm	-	630mm	Each	POA
822384	MOBRA Chamber Bracket Pivot Arm	For JUF/4-6 & JUF/10	650mm	-	820mm	Each	POA
822386	MOBRA Modular Box Conversion Bracket	No-Drill	-	-	-	Each	POA

MOBRA Chamber Mounting Brackets

Prysmian's MOBRA mounting brackets provide the ideal fixings for many of Prysmian's range of fibre optic joint enclosures and termination boxes within chambers.

Prysmian

A Brand of Prysmian Group

- Suitable for most Prysmian joint enclosures and nodes
- Universal kits also available



Item	Description	Type	Mfr Ref	Width	Length	UoM	Price
820600	TM MOBRA Mounting Kit	Small & Medium Node	XJTSC02405	60mm	810mm	Each	£40.67
828146	MOBRA Mounting Bracket	For LMJ	XJTSC03203	60mm	810mm	Each	£79.77
828147	Universal MOBRA Arm Mounting Kit	For LMJ	XJTSC02953	-	-	Each	£48.30
828148	Universal MOBRA Arm Mounting Kit	For UMJ/CMJ/MMJ	XJTSC03286	-	-	Each	£20.98
828145	Half Size Mounting Bracket	For UMJ/CMJ/MMJ	XJTSC03265	60mm	-	Each	£38.58

Joint Support Kit 1A

For use in underground chambers to suspend closures and other equipment within the chamber. It comprises of 2x 2.42m lengths of rigid duct

- Product diameter: 33.55mm
- Product weight: 1.4g/m
- Metal free: Yes
- Minimum bend radius: 11D
- Maximum tensile load: 2250N
- Product specification: LN166
- Product reference: 017807

Additional freight charges may be necessary for this product due to length



Item	Description	UoM	Price
827118	Joint Support Kit 1A	Pair	£22.09

Cable Management Bars

Designed to manage and support cable runs throughout manhole pits and chambers

- Manufactured from galvanised steel
- Protected against corrosion



Item	Description	Width	Length	Depth	Price
832041	Cable Support Bar	50mm	838mm	5m	£15.88
832042	Cable Support Bar	50mm	1100mm	5m	£22.30
832043	Cable Support Bar	50mm	1980mm	5m	£34.91

CommScope TENIO Brackets

Brackets for use with TENIO fibre enclosures.

- For mounting enclosures and managing cables



COMMSCOPE®

Item	Description	Mfr Ref	Price
803903	TENIO-MOBRA Mounting Bracket	CW6452-000	£20.15

External Cabling

Cable Bearers (Wall Type)

Galvanised steel wall brackets for mounting cable bearers

- For supporting cables in manholes and joint boxes. The type numbers indicate the number of brackets which the bearers will carry
- Also known as BT Cable Bearer Wall Type 2, 3, and 5 respectively



Item	Description	BT Ref	Length	Positions	Price
828375	Cable Bearer Wall	Type 1	178mm	1 Position	£2.73
992083	Cable Bearer Wall	Type 2	279mm	2 Positions	£4.83
992084	Cable Bearer Wall	Type 3	508mm	5 Positions	£8.25
992085	Cable Bearer Wall	Type 5	813mm	9 Positions	£9.34
828376	Cable Bearer Wall	Type 8	1270mm	15 Positions	£10.84
828377	Cable Bearer Wall	Type 12	1879mm	23 Positions	£37.96

Cable Bearer Brackets

Cable bearer brackets used with wall type cable bearers and locking pins. The type number indicates the effective length

- Also known as BT Bracket Cable Bearer 5, 8, and 12 respectively



Item	Description	BT Ref	Length	Price
828378	Bracket Cable Bearer	No.3	150mm	£2.67
992090	Bracket Cable Bearer	No.5	165mm	£2.67
992091	Bracket Cable Bearer	No.8	241mm	£4.90
992092	Bracket Cable Bearer	No.12	343mm	£5.77
828379	Bracket Cable Bearer	No.18	500mm	£12.14
828380	Bracket Cable Bearer	No.24	650mm	£15.04

Iron Anchors

Galvanised steel device for mounting in concrete to provide an anchoring point

- Also known as BT Iron Anchor 4



Item	Description	BT Ref	Price
992099	Iron Anchor	No.4	£9.83

Manhole Steps

Galvanised non-slip step for brick or concrete manholes

- Also known as BT Step Manhole 1




Item	Description	BT Ref	Price
992100	Manhole Step	No.1	£5.70

Sump Grills

Tough PVC grill for manhole sumps

- Also known as BT Grating Sump 2A
- Dimensions 250mm height x 250mm width



Item	Description	BT Ref	Price
992101	PVC Sump Grill	2A	£4.85

CAN'T FIND WHAT YOU'RE LOOKING FOR?

Comtec carry over
12,000 lines in stock
 Call our sales team today!

Cable Bearer Locking Pins

Galvanised steel concrete foundation mounting bolts

- Also known as BT Pins Locking Cable Bearer



Item	Description	Price
992095	Cable Bearer Locking Pins	£0.71

Foundation Bolts

Galvanised steel pin for securing bracket cable bearers to channel brackets

- No. 1 for cross connection cabinets Diameter: 15.2mm
- No. 2 for fixing cable bearers in new concrete and brickwork Diameter: 12.7



Item	Description	BT Ref	Length	Price
992097	Foundation Bolt	No.2	125mm	£0.75
992096	Foundation Bolt	No.1	150mm	£2.58

Cable Pulling Winch Across Manholes

A lightweight capstan winch designed for use over manholes

- For simple cable pulling and cable recovery
- 1000Kg Cable pulling capacity
- Suitable for up to 12mm rope
- Weight: 26Kg



Item	Description	Type	Price
827300	Cable Pulling Winch	Across Manholes	£1430.00

External Cabling

Hydraulic Manhole Lifter

A hydraulic manhole lifter supplied with 4 pairs of keys used for lifting different types of carriageway covers

- Safe Working Load: 800Kg
- Quick and easy to assemble



Item	Description	Type	Price
823336	Hydraulic Manhole Lifter	Complete with Sets of Keys	£642.47
823807	Hydraulic Manhole Lifter	No Keys	£550.00

Hydraulic Lifter Keys

Range of lifting keys used in conjunction with hydraulic manhole lifters

- Keys used in pairs
- 1A used to lift Elkington type manhole covers
- 2A used to lift unit type covers
- 3B used to lift triangular covers and carriageway covers C and D
- 4A used to lift old types of manhole covers
- 5C used in pairs for lifting unit type light covers and covers driveway




Item	Description	Type	Price
992242	Hydraulic Manhole Lifting Key	1A	£25.72
992243	Hydraulic Manhole Lifting Key	2A	£26.46
992244	Hydraulic Manhole Lifting Key	3B	£37.42
992245	Hydraulic Manhole Lifting Key	4A	£13.91
992246	Hydraulic Manhole Lifting Key	5C	£46.49

Hydraulic Lifters

Proteus hydraulic lifters are light and easy to use, and with a safe working load of 1.5 tonnes it will enable anyone to lift even stuck covers with minimal effort. With the right selection of keys and accessories, it is capable of lifting virtually any cover with keyholes, including single piece sewer covers, split 'double-triangle' covers, block-paved covers with four keyholes, and Elkington gatic covers

- Keys and spreader bar purchased separately
- Handylifter model tackles covers up to 900mm x 900mm
- Texas model tackles covers up to 1100mm x 1100mm

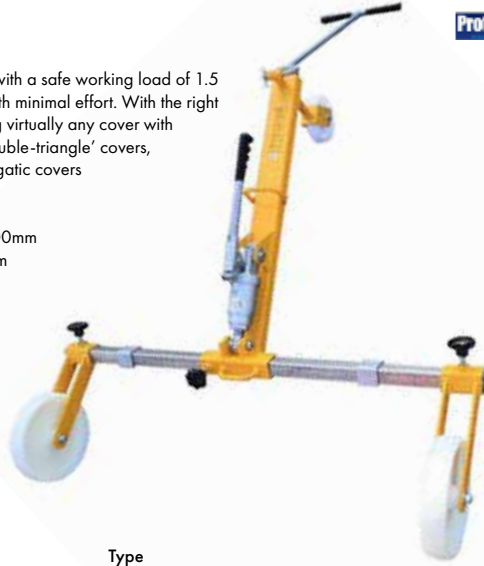

Proteus Equipment

Item	Description	Type	Price
992109	Hydraulic Manhole Lifter	Handylifter	£652.65
798333	Hydraulic Manhole Lifter	Texas	£683.85
830422	Hydraulic Manhole Lifter Replacement Spreader Bar	Square Section	£76.44

Spreader Bar with Keys

Spreader bars for use with the Proteus Handylifter or

- 1100mm Texas spreader bar



Proteus Equipment

Item	Description	UoM	Price
803019	Texas Spreader Bar (Pair) with Gatic Keys	Pair	£240.16

Hydraulic Lifter Keys

High quality keys for use with hydraulic lifters such as the Handylifter & Texas

- BT Welded Ringtop Keys



Proteus Equipment

Item	Description	UoM	Price
803021	Hydraulic Lifting Keys	Pair	£52.50

External Cabling

External Cabling

ManUp Key Lifting Tool

The ManUp Key is a revolutionary lifting tool designed to make the removal of manhole covers easy and effortless. A 'one man' solution it ensures safe lifting and manual handling. V3 has 2 additional and improved grips for even more comfort and versatility

- Manholes can be lifted without the use of hammers and chisels, preventing damage to covers and surrounding area
- Provides a momentary upward force of 1.5 tonnes from its 8Kg weight and slide hammer action
- One man solution still ensuring all health and safety aspects of safe lifting and manual handling
- Simply add the specific tip required for the industry required
- Other tips available to order
- 'Telecoms Kit' includes Lifting tool, 4 Tips & Locking rings in a padded case
- Includes: 32mm & 22mm Flat Tips, 10mm J Tip & 20mm Oval Tip



YouTube VIDEO ONLINE

Item	Description	Height	Width	Price
824128	Lifting Tool (V3) & Telecoms Set c/w Locking Clips & Case	800mm	200mm	£264.04
824130	Lifting Tool (V3) (Bare Unit - No Tips)	800mm	200mm	£139.39

Replacement Tips

A comprehensive range of additional tips for the ManUp Key Tool Bar

- Tips marked with a *(D) are commonly used with drainage manholes
- Tips marked with a *(G) are commonly used with gas manholes
- Tips marked with a *(E) are commonly used with electricity covers
- Tips marked with a *(T) are commonly used with telecoms covers
- Tips marked with a *(PC) are commonly used within pest control environment
- Tips marked with a *(FS) are commonly used by the fire service
- Tips marked with a *(DWT) are commonly used within drinking water applications




Item	Description	For Use With	Length	Price
820868	8mm C Shape Hook	*(D)	182mm	£25.15
820867	8mm J Tip Hook	*(D)(G)(E)(T)(PC)(DWT)	174mm	£25.15
820865	10mm J Tip Hook	*(D)(G)(E)(T)(PC)(DWT)	174mm	£25.15
820863	10mm Threaded Tip	*(D)(PC)	160mm	£25.15
820862	12mm Threaded Tip	*(D)(PC)	160mm	£25.15
820864	16mm J Tip Hook	*(D)(PC)	174mm	£25.15
820872	20mm Oval Key	*(E)(T)	160mm	£25.15
820860	22mm Flat Tip	*(D)(PC)(FS)(DWT)	160mm	£25.15
820871	31mm Oval Key	*(D)	160mm	£25.15
820771	32mm Flat Tip (Common)	*(D)(PC)(FS)(DWT)	160mm	£25.15
820870	Fire Hydrant Valve Key	*(D)(FS)(DWT)	200mm	£57.48
826959	Retaining Pin	All Tips	-	£5.00

Joint Box Key No.2

Lever action key for joint box and light concrete footway/driveway covers

- Also known as BT Key Joint Box 2



Item	Description	Type	Price
992107	Joint Box Key No.2	Short Handle	£16.01

Joint Box Key No.4

Lever action key for joint box and light concrete footway/driveway covers

- Also known as BT Key Joint Box 4



Item	Description	Type	Price
992108	Joint Box Key No.4	Long Handle	£21.47

Joint Box Key No.5

Lever action key for joint box and light concrete footway/driveway covers

- Key No.5 has a supporting counter balanced leg to add safety to the lifting operation
- Also known as BT Key Joint Box 5
- Optional magnetic counter balance arms (828397)



Item	Description	Type	Price
994232	Joint Box Key No.5	Balanced Leg	£24.80
829050	Joint Box Key No.5	Magnetic Balanced Leg	£24.95
828397	Magnetic Counterbalance Arms	For Key Joint Box No. 5	£9.49

Joint Box Key Replacement Hook Set

Replacement hook and pin set (nut & bolt) for joint box key No.2, No.3 & No.5

- Nut and bolt also orderable separately



Item	Description	Price
799513	Replacement Hook Kit	£4.85
834326	Replacement Hook Set Quick Change	£6.40
801982	Replacement Nut & Bolt	£0.97

Pit Roller Bar

Metal bar used to roll opened pit lids safely into a secure position

- Joint box keys are sold separately



Item	Description	Price
790888	Pit Roller Bar	£7.72

Keyhole Insertion Safety Shim Tool

The keyhole insertion safety shim, also known as a KISS tool, is used to assist the lifting of pit covers which have damaged insertion / key holes. These tools are often used in conjunction with Joint Box Key No.5

- Helps with pit covers that are damaged
- Limits the risk of injury
- Used with Joint Box No.5



Item	Description	Price
822980	Keyhole Insertion Safety Shim (KISS) Tool	£7.77

Pit Lifting Key

A 20" pit lifting key



**SOLD IN
SINGLES, USED
IN PAIRS**

Item	Description	Price
808361	Pit Lifter Key	£6.75

External Cabling

Manhole Lifting Key 9752

Standard lifting key for use on heavy/medium non-locking covers, can also be used for the lifting of locking heavy duty Broadstel

- Also known as BT Key Lifting 9752
- Length 160mm



Item	Description	Blade	Price
990057	Manhole Lifting Key	16mm x 36mm	£5.20

Joint Box Lifting Key 9753

Standard lifting key for use on light duty non-locking covers and also the lifting of pedestrian duty Broadstel

- Also known as BT Key Lifting 9753
- Length 103mm



Item	Description	Blade	Price
990058	Joint Box Lifting Key	7mm x 22mm	£5.33

Manhole Lifting Key Type D

D-shaped lifting key for use on E type and unit type covers of square and rectangle shape. The key incorporates an adjustable locking nut which bears against the frame to lift the cover. To be used in pairs

- Also known as BT Carriageway Key 2A



Item	Description	Price
992105	Manhole Lifting Key Type D	£16.53

Manhole Lifting Key Type T

T-shaped steel lifting key for use on circular, oval woods type and triangular carriageway manhole covers. It also incorporates an eye so that a crowbar may be used to assist lifting



Item	Description	Length	Price
830023	Manhole Lifting Key Type T Extended	655mm	£19.25
992106	Manhole Lifting Key Type T	432mm	£14.97

External Cabling

Pillar Key

A multi purpose triangular shaped key for use on hollow poles, cross connection cabinets, distribution pillars and jointing posts

- Also known as BT Key Pillar



Item	Description	Price
100143	Pillar Key	£4.50

Star Pillar Key

A star shaped key for use on cabinets

- Also known as Huawei pillar key




Item	Description	Price
816137	Pillar Key	£7.95

PVC Duct

Standard PVC duct, socketed at one end & plain at the other end

- Solid wall construction, capable of being back-filled with As Dug materials where appropriate and not affected by sharp stone impingement
- Smooth bore ensuring easier and safer installation of sub-ducts and cables owing to lower internal friction
- Standard interference fit / push fit socket systems & ring seal socket systems
- 53.9mm duct also known as BT Duct 56
- 96.5mm duct also known as BT Duct 54D

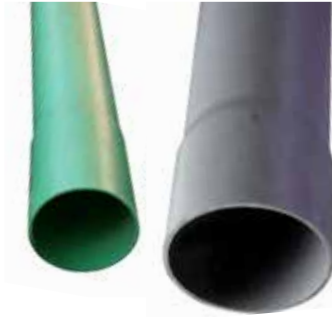

Non-standard shipping costs apply due to length

Item	Description	Diameter	Colour	Length	Price
991639	PVC Duct	53.9mm	Grey	3Mtr	£14.15
833092	PVC Duct	53.9mm	Green	6Mtr	£19.80
992887	PVC Duct	96.5mm	Grey	6Mtr	£39.13
992885	PVC Duct	96.5mm	Green	6Mtr	£39.13

PVC Duct Bends

Bends for standard duct with a variety of different angles

- 53.9mm duct system also known as BT Duct 56, 96.5mm duct system also known as BT Duct 54D



Item	Description	Angle	Diameter	Colour	Price
803595	PVC Duct Bend	22.5 Degrees	53.9mm	Grey	£4.79
801677	PVC Duct Bend	45 Degrees	53.9mm	Grey	£4.79
991678	PVC Duct Bend	90 Degrees	53.9mm	Grey	£4.54
803597	PVC Duct Bend	9 Degrees	96.5mm	Grey	£7.18
803594	PVC Duct Bend	22.5 Degrees	96.5mm	Grey	£7.17
803591	PVC Duct Bend	45 Degrees	96.5mm	Grey	£9.27
991646	PVC Duct Bend	90 Degrees	96.5mm	Grey	£8.96
803596	PVC Duct Bend	11.25 Degrees	96.5mm	Green	£8.01
803593	PVC Duct Bend	22.5 Degrees	96.5mm	Green	£8.01
803592	PVC Duct Bend	45 Degrees	96.5mm	Green	£8.69
991647	PVC Duct Bend	90 Degrees	96.5mm	Green	£8.96

PVC Duct Sleeve Connectors

PVC straight duct connector for joining lengths where the sockets have been removed

- 53.9mm duct system also known as BT Duct 56, 96.5mm duct system also known as BT Duct 54D




Item	Man. Code	Description	Diameter	Colour	Price
803598	804	PVC Duct Connector Sleeve	53.9mm	Grey	£3.77
992674	519	PVC Duct Connector Sleeve	96.5mm	Grey	£5.28
991691	1250S	PVC Duct Connector Sleeve	96.5mm	Green	£2.41

External Cabling

PVC Split Ducts

Tongued and grooved duct for repairing damaged section

- Use with repair kits for 96.5mm diameter duct
- 96.5mm duct system also known as BT duct 54D

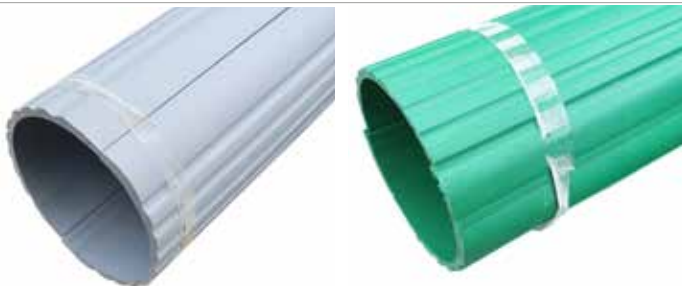

Item	Description	Diameter	Colour	Length	Price
991643	Split Duct 54	96.5mm	Grey	3Mtr	£49.82
993181	Split Duct 54	96.5mm	Green	3Mtr	£43.98

Duct Repair Kits

- Kit of inserts and liners to provide a spigot for 96.5mm duct
- 96.5mm duct system also known as BT duct 54
- Duct repair kit also known as BT Duct Repair Kit 3A
- Requires split duct (sold separately - 991643 Green / 993181 Grey)



Item	Description	Diameter	Colour	Price
991698	Duct Repair Kit 3A	96.5mm	Grey	£30.93
993534	Duct Repair Kit 3A	96.5mm	Green	£31.02
991699	Split Duct Repair Kit	102mm	Grey	£25.62

Duct Plug 1A Sponge

A sponge duct plug for use with PVC duct

- Made of high density sponge
- For use with 53.9mm duct systems such as BT Duct 56



Item	Description	UoM	Price
790033	Duct Plug Sponge 1A	Pack of 10	£42.80

PVC Duct End Caps

End caps for PVC duct system

- 53.9mm duct system also known as BT Duct 56, 96.5mm duct system also known as BT Duct 54D



Item	Description	Diameter	Price
803599	Duct End Cap	53.9mm	£0.74
803600	Duct End Cap	96.5mm	£1.34

PVC Duct Tee (Swept)

Swept tee for use with PVC duct system, tees off from a 96.5mm duct to a 53.9mm swept exit

- 53.9mm duct system also known as BT Duct 56, 96.5mm duct system also known as BT Duct 54D
- Angle 90°



Item	Description	Diameter	Price
991679	Duct Tee	96.5mm-53.9mm	£15.01
803601	Duct Tee	96.5mm-53.9mm	£14.10

PVC Duct Tee Split (Swept)

Split duct tee suitable for existing duct where cables are present

- Main duct 96.5mm, tee duct 53.9mm
- 53.9mm duct system also known as BT Duct 56, 96.5mm duct system also known as BT Duct 54D
- Angle 45°



Item	Description	Price
803603	Duct Tee Split	£12.83

PVC Duct Y-Branches

PVC duct Y-Branch, also called an equal swept tee, for branching off from 96.5mm duct with a new 96.5mm duct exit

- Manufactured from solid wall PVC duct
- Used for breaking and branching where multiple cables are present
- Supplied with non-returnable woven polypropylene sacks
- Usually double socketed
- Angle 45°



Item	Description	Price
803605	Duct Y-Branch	£38.31

PVC Duct Reducer

PVC duct reducer, reducing duct from 96.5mm to 53.9mm

- 53.9mm duct system also known as BT Duct 56, 96.5mm duct system also known as BT Duct 54D



Item	Description	Price
803606	Duct Reducer	£24.05

Underground LDPE Marker Tapes

A selection of LDPE tapes designed to be buried into the ground to mark buried cable routes. Can prevent damage when future contractors dig into the ground and find this tape first

- 810628 includes a tracer wire so that it can be detected underground
- Width 150mm



Item	Description	Length	Price
810628	'Fibre Optic Cable Below' Tracer Wire	100m	£29.57
813050	'Fibre Optic Cable Below'	365m	£14.11
813051	'Telephone Cable Below'	365m	£14.11
813048	'Electric Cables Below'	365m	£14.11

External Cabling

Duct Brushes

Cylindrical bristle brush for cleaning duct bores



Item	Description	Size	Duct Bore	Length	Price
992290	Duct Brush	80mm	76mm	350mm	£84.11
992293	Duct Brush	86mm	83mm	350mm	£95.33
991987	Duct Brush	95mm	90mm	350mm	£99.07
992294	Duct Brush	108mm	102mm	350mm	£105.14

Duct Mandrels

Duct mandrels with swivelling eyes for proving duct runs



Item	Description	Size	Duct Bore	Length	Price
992295	Duct Mandrel	43mm	51mm	200mm	£57.95
992296	Duct Mandrel	70mm	76mm	240mm	£60.75
992297	Duct Mandrel	76mm	83mm	240mm	£78.00
991988	Duct Mandrel	83mm	90mm	240mm	£82.24
992299	Duct Mandrel	95mm	102mm	240mm	£84.11

Lubricating Pump

Pump used for applying cable lubricants.

- Also known as Pump Lubricant 2A



Item	Description	BT Ref	UoM	Price
200319	Pump Lubricant	2A	Each	£255.00

Duct Motor 2B, Compressor & Reel Hose 6

Duct motor for placing drawrope and light cabling into ducts

- Supplied complete with bag grips
- Replacement bags available separately



828409



824142



828410

Item	Description	BT Ref	Diameter	Length	UoM	Price
824142	Duct Motor	2B	-	-	Each	POA
828409	Reel Hose 6	-	3/8"	300Mtr	Each	POA
828410	Air Compressor for Duct Motor 2B	-	-	-	Each	POA

Duct Motor Bag Grips

Bag grips for use with duct motor 2B which is used when placing drawrope and light cabling ropes into duct

- Available in small, medium and large



Grip 4



Grip 5



Grip 6

Item	Description	Size	Price
200056	Duct Motor Bag Grip 4	Medium	£9.70
200058	Duct Motor Bag Grip 5	Small	£9.70
200057	Duct Motor Bag Grip 6	Large	£9.70

External Cabling

TDUX Inflatable Duct Seals

TDUX is a very flexible & reliable inflatable wraparound duct sealing system for permanently sealing telephone cable ducts in order to prevent the leakage of water from the duct into exchange vaults or manholes

- Suitable for use with plastic, concrete or steel ducting wall-feed through systems
- Can be used with polyethylene or lead-jacketed cables
- Various sizes available for sealing a wide range of ducts and cables
- Fast and easy to install, even in congested enclosures, requiring over 3 parts for completion
- Water and airtight up to 50kPa
- Environmentally friendly & non-toxic
- Resistant to chemicals & bacteria
- Easy and fast removal



Item	Man. Code	Description	Mfr Ref	Duct Size	UoM	Price
994383	TDUX-60-INT	TDUX Inflatable Duct Seal	T-DUX-60	Fits Duct 45mm-60mm Dia	Pk of 10	POA
804380	TDUX-90-INT	TDUX Inflatable Duct Seal	T-DUX-90	Fits Duct 60mm-100mm Dia	Pk of 10	POA
994386	TDUX-100-INT	TDUX Inflatable Duct Seal	T-DUX-100	Fits Duct 45mm-110mm Dia	Pk of 10	POA

TDUX Inflation Tool

Inflation tool for use with TDUX kits. Uses CO2 gas cylinders which contain 16g of CO2 and can inflate a minimum of 3 TDUX-100 duct seals in vacant ducts. Features an automatic pressure monitoring system to guarantee the required inflation pressure of 3.0 +/- 0.2 Bar

- Supplied with carry case
- TDUX Gas cylinders purchased separately (994388)



Item	Man. Code	Description	Mfr Ref	Price
788489	070668-000	TDUX Inflation Tool	TDUX-IT-16	POA

TDUX Gas Cylinder Refills

CO2 gas cylinders for use with duct inflation tool

- Gas cylinders contain 16g of CO2 (can inflate a minimum of 3x TDUX-100 duct seals per cylinder)



Item	Man. Code	Description	Mfr Ref	UoM	Price
994388	985444-000	TDUX Gas Cylinder Refill	TDUX-CO2	Pk of 10	POA

Duct Sealing Kits

FiloSeal+ is a universal solution for sealing cables and pipes in ducts or bore holes. Suitable for sealing several cables or pipes contained in one duct and also allows re-entry of the seal to add or remove cables or pipes as required

- High levels of gas and water tightness
- Resistant against water, alkaline, chemical agents
- Non corrosive
- Solvent free
- Quick and easy installation
- A complete kit for one duct
- Virgin Media approved



You Tube VIDEO ONLINE

Item	Description	Diameter	Price
815162	FiloSeal+ Duct Seal	75-125mm	£62.65
815163	FiloSeal+ Duct Seal	150-200mm	£96.78

HD Duct Sealing Kits

FiloSeal+HD is a universal solution for sealing larger heavy cables and pipes in ducts, bore holes or transit frames

- Up to 2 bar pressure resistance
- 100Kg pulling force on the cables when sealed
- 10xd at 45° with 1 bar pressure bending test



You Tube VIDEO ONLINE

Item	Description	Diameter	Price
815164	FiloSeal+ HD Duct Seal	Up to 110mm	£79.53

HD Fire Duct Sealing Kits

FiloSeal+HD FIRE is a highly certified fire, gas and water sealing system for both ducts and transit frames

- Up to 4 hours fire resistance in transit frames (single side)
- Up to 4 hours fire resistance in ducts
- Tested to BS EN 1366-3 2009
- Up to 2 bar pressure resistance
- 100Kg pulling force on the cables when sealed
- 10xd at 45°, with 1 bar pressure bending test
- Virgin Media approved



You Tube VIDEO ONLINE

Item	Description	Diameter	Price
815165	FiloSeal+ Fire Duct Seal	Up to 110mm	£123.45

External Cabling

Radiodetection CAT4 & Genny Cable Locator

Cable Avoidance Tools (CAT) and Signal Generators (Genny) by Radiodetection

- Locate power, radio and Genny4 signals
- Dynamic overload protection automatically filters out high levels of interference
- eCert technology provides a comprehensive assessment of the unit's hardware and software
- Depth button
- Sensitivity control
- Detachable speaker
- IP54 rated

VIEW MORE
POWER CABLE
DETECTION ONLINE



Item	Description	Model	Price
810639	Cable Avoidance Tool	CAT4	£744.60
810642	Signal Generator	Genny4	£752.00

vScan CAT & Genny Cable Locators

Designed to make buried utility detection a simple and cost-effective process. The main features and operational controls are in keeping with industry standards so minimal training is required

- Shipped with a spacious canvas carry bag
- Large, high resolution, high contrast dot matrix display: makes signal interpretation simple and intuitive.
- Auto backlight: for use after dusk
- Compass line direction indicator: ensures correct alignment over utility
- Visual, audible and vibration alerts: alerts can be set for: shallow cable, overload, excessive swinging and overhead cables
- Passive signals: power, radio and also as a free option, cathodic protection (CP) 100Hz
- Current measurement: helps positively identify the targeted line
- Simple two button operation: on/off and information (such as depth and current)
- Movable speaker: allows the user to place the speaker against the ear while holding the receiver at arm's length
- Robust ABS casing with rubber protection bumpers
- 2GB auto data logging: helps identify usage and training needs

Detectable Tapes
Page 197



Item	Description	Model	Price
826478	Cable Avoidance Tool	vScan CAT & Genny	£1102.26

Cable Roller Guide 4 Roller

The handy 4 roller cable guide acts as a helping hand when trying to feed ropes or cables on a specific route

- Quick to deploy
- 4x metal rollers
- Can be opened to allow entry from the side



Item	Description	Price
830001	Cable Roller Guide	£70.50

Heavy Duty Cable Roller Guide

Heavy duty straight, corner and edge mount cable roller guides to assist the installation of cable, duct, microduct and fibre cables in to open trenches, pits and pipework without causing damage to the cable sheath or duct surface and incurring overbending stress on the cables

- Cable rollers move easily on their free running spindles
- Increased cable support aiding labour productivity and site safety for cable pulling teams
- Prevents damage to cable sheath from trench debris or loose aggregate



Item	Description	Price
200240	Straight Cable Roller	£32.50
823676	Corner Cable Roller	£80.82

Rope Guiding Roller

Lightweight metal roller for small ropes and cables

- Used to prevent damage to cabling ropes at joint boxes
- Also known as BT Roller Rope Guiding Surface



Item	Description	Price
991978	Cable Duct	£28.42

Duct Mouth Roller

Roller for mounting into the end of 90mm ID duct (96.5mm)

- Can be used with BT Duct 54
- Also known as BT Guide Cabling 17A



Item	Description	Int Duct	Price
992261	Duct Guide	90mm-97mm	£65.00

Split Cable Guides

Split cable guides for cabling through ducts with 89-92mm ID (96.5mm Duct)

- Straight version for ducts in-line in chambers
- Angled version for offset ducts
- Also known as BT Guide Cabling 1 & 2 respectively



Item	Description	Internal Duct Dia	Price
992309	Guide Cabling 1	89mm-92mm	£102.00
991977	Guide Cabling 2	89mm-92mm	£114.00

Split Bellmouths

Used to protect cables when drawing into ducts. Consists of a two part tubular sleeve which is assembled over the cable and then joined together

- BT Bellmouth 1 - For use on 83mm ducting
- BT Bellmouth 2 - For use on 90-92mm ducting



Item	Description	Diameter	Price
992234	Cable Duct Bellmouth 1	83mm	£25.29
991991	Cable Duct Bellmouth 2	90mm	£26.74

External Cabling

Solid Bellmouth

Solid bellmouth used to protect cables when drawing into ducts. Designed for use with cable guide 6A and 6B

- Also known as BT Bellmouth 1A




Item	Description	Price
991980	Cable Duct Bellmouth 1A	£47.84

Duct Grip Coupling

Grip couplings are designed to assist the threading of sub ducts by stiffening the leading end. They comprise of BT couplings with 3 metre long glass fibre rods which screw into the sub duct.

- Grip Coupling 1A designed to thread 25mm diameter sub duct



Item	Description	BT Ref	Length	UoM	Price
822057	Grip Coupling	1A	3Mtr	Each	£51.50

Guide Rod Flexible 3

For use with mounted rodding systems as a guide and rope guard when winching with Rod Duct 3

- 3Mtr flexible rod
- One plain end and the other fitment for connection to either a rodding machine or Guide Rod Flexible 4



Item	Description	Length	Price
200103	Guide Rod Flexible 3	3Mtr	£208.55

Guide Rod Flexible 4

For use with Clamp 13A to extend the length of the Guide Rod Flexible 3

- 2.9Mtr flexible rod
- 3.8mm diameter



Item	Description	Length	Price
200104	Guide Rod Flexible 4	2.9Mtr	£232.80

Clamp Guide 2A

An extendable compression strut for clamping Guides Rod Flexible 3 and 4 and Guide Cabling 5 into joint boxes

- Extendable clamp



Item	Description	Price
126481	Clamp Guide 2A	£42.18

Drawropes

3 Strand polypropylene rope for light cabling work

- Supplied on a wooded drum for ease of deployment and retrieval
- Durable and re-useable



Item	Description	Diameter	Length	Price
991970	Drawrope	6mm	500Mtr	26.68

Slick Line

A low friction draw cord, used for pulling cable in or out of subduct

- 8kN breaking strength
- * Sold per Drum - Check with sales for availability*



**GREAT
NEW PRICE**

Item	Description	UoM	Price
824611	Slick Line 8kn Rope	4250Mtr	£970.00



X Board 300 Cable Dispenser

The compact X BOARD XB 300 is a universal professional cable winder/unwinder for small to medium cable reels. It enables trouble-free working without tangled cables

SEE VIDEO ONLINE



- Universal cable drum rewinder and unwinder
- Suitable for all types of cables and cable drums even with very small inner diameters
- Compact at just 300mm diameter
- Lightweight at just 1.26Kg net weight
- Loadable up to 300Kg
- Excellent for damaged cable drums
- Non-slip and stable base

Item	Description	Mfr Ref	Diameter	Price
835250	X-Board Cable Dispenser	XB300	30mm	£99.50

EXTENDED SELECTION AVAILABLE ONLINE

X Board 500 Cable Dispenser

The X-BOARD XB500 is a universal device for winding in/out cable drums. Suitable for all types of cables and pipes (single core lines, cable rings, cable drums, empty conduits, ropes and rope drums), it enables trouble-free and efficient working without the tangled cables. Especially ideal for damaged cable drums

SEE VIDEO ONLINE



X-Board shown for illustration purposes

- Load bearing capacity 800Kg
- Rubberised feet ensure a non-slip and secure standing position whilst protecting completed flooring surfaces
- Weight 6.94Kg
- Height 133mm
- Diameter 500mm
- Optional 750mm pole extender (822855)

Item	Description	Mfr Ref	Diameter	Length	Price
816872	X-Board Cable Dispenser	XB500	-	-	£213.53
822855	X-Board Pole Extender	XBPE	40mm	750mm	£65.77

EXTENDED SELECTION AVAILABLE ONLINE

Runpolifter 4500 Cable Drum Lifter

Foldable cable drum lifter/dispenser with 4500kg lift capacity. The lifting supports are equipped with a 2-stage gearbox with a self-locking spindle



- Maximum drum diameter of 1600mm
- Maximum drum width of 1250mm
- Maximum drum weight of 4500kg
- Easy to dismantle, transport and store
- Automatic brake secures lifted drum



Item	Description	Price
830847	Runpolifter Cable Drum Lifter	£2340.00

External Cabling

External Cabling

Runpocam RC2 Multifunction Inspection Camera

The RUNPOCAM RC2 is a multifunction inspection camera designed for duct inspection

- Protection class IP67
- Pipe inspection from 0.14 mm (inside diameter)
- Suitable for ventilation pipes, drainage pipes, sewage pipes and much more
- Also for cavity inspection and suspended ceilings
- Available in lengths 10m, 30m or 50m
- Memory function/document evidence
- Photo (JPG), Video HD (AVI) and Audio

Spool with camera cable can be easily unwound or rewound via the X BOARD series

SEE VIDEO ONLINE



Item	Description	Length	Price
835230	Runpocam RC2 Multifunction Duct Inspection Camera	10Mtr	£455.60
835232	Runpocam RC2 Multifunction Duct Inspection Camera	30Mtr	£492.10
835233	Runpocam RC2 Multifunction Duct Inspection Camera	50Mtr	£528.60

EXTENDED SELECTION AVAILABLE ONLINE

Runpo 5 Cable Pulling System

With a diameter of just 5.3mm and a triple twist design the Runpo 5 has a frictional resistance that is 50% less than other fish tapes. The patented viewfinder tip, the RUNPOGLIDER, with swivel allows even the tightest radii to be overcome

- 270kg total breaking load
- Virtually break-free, even with the tightest radii
- No buckling or sticking = time savings
- Optimised for 16-40mm ducts



Item	Description	Length	Price
835276	Runpo 5 Cable Pulling System	30Mtr	£136.50

EXTENDED SELECTION AVAILABLE ONLINE

Power Rex Fibreglass Rod Kit

A 3mm diameter fibreglass rod cable pulling system in a convenient dispenser. The patented RUNPOGLIDER with swivel ensures easy insertion and extraction without twisting

- Optimised for 16-50mm ducts
- 120kg total breaking load
- Bending radius with ending joint - 5.5mm
- Bending radius rod only - 30mm



Item	Description	Diameter	Length	Price
835277	Power Rex Fibreglass Rod Kit	3mm	30Mtr	£95.65
835278	Power Rex Fibreglass Rod Kit	3mm	50Mtr	£117.40



Runposticks Flexible Rod Lead In Set

Runposticks create a flexible guide tip for continuous duct rods. The 13 part kit includes 1 metre rods with a range of flexibility together with accessories and a storage bag

- Plastic coated rods
- High flexibility for tight bends
- Includes a 25mm roller and 20mm guide head



Item	Description	Price
835279	Runposticks Flexible Rod Lead In Kit	£83.55

EXTENDED SELECTION AVAILABLE ONLINE



Runpometer RM35 Digital Cable Distance Measuring Device

A digital cable length measuring device which is used to precisely measure cables, single conductors, ropes, pipes or hoses with a diameters up to 32mm

- Splash water & dust protected
- Impact and breakage protected
- Compatible with all unwinding systems
- Calibratable
- For measuring lengths with cable pulling systems
- Easy to use
- Totalling function
- Countdown function with signal



Item	Description	Price
834669	Runpometer Digital Cable Length Measuring Device	£330.58

EXTENDED SELECTION AVAILABLE ONLINE



Laser Distance Meter RM80

A powerful laser measuring device with a range up to 80 metres

- Extensive calculation functions
- Angle and inclination display (Pythagoras)
- Storage of 99 measurement results
- Stop bracket for 90° corners



Item	Description	Price
835281	RM80 Laser Distance Meter	£99.50

External Cabling

Drawrope & Dropwire Dispensers

Dispensers ideal for dispensing drawrope and dropwire



808754



992045

992044



Item	Description	Price
808754	Drawrope Dispenser	£30.95
992045	Dropwire Dispenser 1	£55.16
992044	Dropwire Dispenser 2B	£78.63

Universal Frame Cable Dispensers

Universal steel folding reel dispenser for cable and rope

- Frame supplied with removable bar
- Max reel: 500 x 400mm
- 24 inches high



Item	Description	Capacity	Price
993471	Frame Cable Dispenser	91Kg	£27.75

Rack-A-Tiers Cable Dispenser HellermannTyton

Durable cable dispenser

- Interlocking pairs
- Versatile
- Waterproof
- Rustproof
- Reliable
- Rugged
- Easy to set up
- Spindle not included
- Capacity 150Kg
- Can be used with cable drum spindle (825239) and collars (825238)




Item	Description	UoM	Price
802817	Frame Cable Dispenser	Pair	£73.08

Universal Jumper Wire Dispensers

Lightweight cable reel for dispensing voice cable and jumper wire

- Lightweight tubular steel frame
- For drums up to 375mm

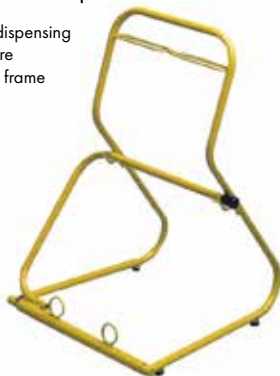

Item	Description	Width	Price
991045	Jumper Wire Dispenser 1A	300mm	£31.04

Universal Cable Reel Stand

One piece metal stand for small cable reels

- Designed for de-reeling CT100 and CT65 coax cables
- 566mm maximum drum diameter
- 230mm maximum drum width
- 34mm minimum drum hole



Item	Description	Price
779933	Cable Reel Stand	£19.40



Cable Drum Rollers

These cable dispensers are available in 2 sizes and can take weights up to 200kg

- Roller positions can be altered using a simple spring loaded mechanism, allowing the engineer to quickly set the dispenser up for the cable drum size
- Made from a durable zinc plated steel
- Adjustable height rubber feet help to hold the dispenser firm
- Strong durable build quality and light in weight



Item	Description	Capacity	Ramp	Price
829023	Cable Drum Roller	180Kg	Single Ramp	£97.00
829024	Cable Drum Roller	200Kg	Double Ramp	£121.25

Cable Drum Jacks

Pair of screw jacks with wide base plate

- 3 Tonne capacity SWL per pair
- Minimum drum diameter 1060mm, maximum 1600mm
- Base area 300 x 300mm
- Weight per pair 37Kg
- Spindles and collars not included (see below)

Non-standard shipping costs apply if over 200kg



Item	Description	Capacity	Height	Price
782014	Cable Drum Jacks	3 Tonne	530mm-840mm	£375.57

Cable Drum Jacks Spindle/Collars

Spindle and collars for use with cable drum jacks (sold separately)

- 782015, 791771 & 825239 Spindle capacity up to 6 tonnes
- 600061 Spindle capacity up to 12 tonnes

Non-standard shipping costs apply if over 200kg



Item	Description	Weight	Diameter	Length	UoM	Price
825239	Cable Drum Spindle	2.5Kg	32mm	1000mm	Each	£7.72
782015	Cable Drum Spindle	12Kg	50mm	1219mm	Each	£48.50
791771	Cable Drum Spindle	18Kg	50mm	1800mm	Each	£59.00
600061	Cable Drum Spindle	53Kg	76mm	2100mm	Each	£130.95
825238	Cable Drum Collars	-	32mm	-	Pair	£13.10
803618	Cable Drum Collars	-	50mm	-	Pair	£37.40
803619	Cable Drum Collars	-	76mm	-	Pair	£36.86



**ORDER
BEFORE 6PM
FOR NEXT DAY
DELIVERY***

*MONDAY - FRIDAY

Corning BT Drop Reusable Drum Set

CORNING

Reusable cable drums for use with Corning CBT drop cables

- Ideal for 'coil in a box' drop cables from Corning
- Saves material waste and disposal of wooden reels
- Can be used with Corning ROC drop & dual drop fibre cables




Item	Description	UoM	Price
827920	Corning BT Drop Reusable Drum Complete Set	Each	£184.12

Drop Reusable Drum Set

COMMSCOPE

Re-usable reel for easy access drop cable

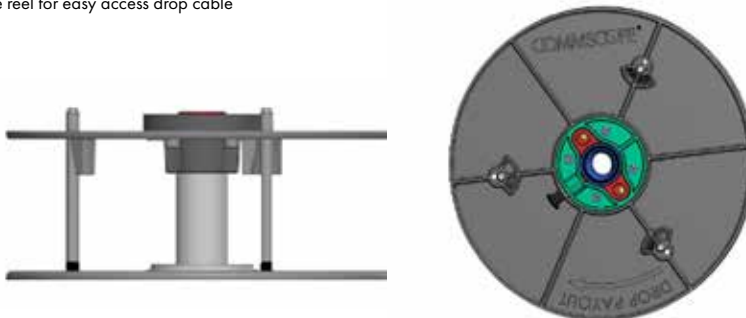

Item	Description	UoM	Price
833975	Drop Reusable Drum Set		POA

Sash Line

Poly rope for lightweight cabling work

- 1x reel of 132Mtrs (formerly 4 hanks x 33Mtrs)
- Also known as BT Sash Line 2



Item	Description	Diameter	Length	Price
782615	Sash Line 2	4mm	132Mtr	£31.13

Sash Line Dispenser

Sash line dispenser incorporates a revolving drum on a spindle

- Also known as BT Dispenser Sash line



Item	Description	Price
200054	Sash Line Dispenser	£14.50

Pole Belt 1B

Pole belt to tie off sash lines at the base of a pole

- Also known as BT Belt Pole 1B
- Used with BT Dropwire Dispensers (992044/992045)



Item	Description	BT Ref	Price
789403	Pole Belt	1B	£30.55

Rigging Head 1A

Rigging head for installing rigging lines in hollow poles. This tool is used by screwing the head on to Rod Duct No.2 and pushing the rod up the inside of a hollow telegraph pole. Weighted draw rope can then be installed to allow cable to be pulled through

- For use with Duct Rod No.2



Item	Description	Price
804384	Rigging Head 1A	£21.68

Cabling Links (Maillon)

Standard screw-type rope links also known as a maillon



- 200293 - Also known as BT Link Cabling 1
- 992691 - Also known as BT Link Cabling 2
- Can be used to joint 2 lengths of cabling rope together

Item	Description	Rope Size	Load Limit	Price
200293	Cabling Link	19mm	980Kg	£5.90
992691	Cabling Link	21mm	1000Kg	£9.70

Wax String

Waxed polyester lacing cord for securing wire and cable. Puts less bends and stress on fibre than unwaxed lacing cord

- Ideal for tidy cable installs



Item	Description	Diameter	Length	Price
801206	Wax String	1.9x0.26mm	200Mtr	£7.05

Securing Rope Tape 12A

Rope to secure polyethylene cables in jointing chambers

- Also known as BT Tape 12A



Item	Description	Length	UoM	Price
792093	Securing Rope	2.5Mtr	Pk of 10	£1.75

ONLINE SPECIAL OFFERS



www.comtecdirect.co.uk

External Cabling

Horse Pole

Tripod used to support poles during dressing

- Safety locking pin
- Folds flat



Item	Description	UoM	Price
600046	Pole Horse	Each	£64.02

Twister Pole

Used to turn poles after installation

- Plate type



Item	Description	UoM	Price
600080	Twister Pole	Each	£64.02

Long Handled Pole Turners

Hand operated long handled pole turner for the alignment of poles after installation

- Forged handle with teeth at the front edge giving better grip to the pole



Item	Description	Other	UoM	Price
825629	Lever Pole Turner	Long Handled	Each	£92.50
830427	Lever Pole Turner	Standard Handle	Each	£60.41

External
Cabling



**BESPOKE VAN KITS
AVAILABLE**

Tailored to your exact requirements
Contact us for details



Rigging Weight 1A

Sash weight for use with Rigging Head 1A

- 0.8Kg
- Supplied with a metal clip



Item	Description	BT Ref	UoM	Price
200152	Rigging Weight	1A	Each	£7.90

Sling Wire Rope 1A

Used for handling wooden poles in conjunction with pole erection units

- Galvanised steel wire rope lifting sling
- Reeving thimbles on each end
- Length: 1.4m



Item	Description	Other	UoM	Price
817887	Sling Wire Rope	1A	Each	£27.26

Pole Jack

Hand operated jack for shifting, straightening or recovering poles

- Rack & panel mechanism
- 5000kg capacity
- To be used in conjunction with Pole Jack Chain



Item	Description	UoM	Price
700262	Pole Jack	Each	£2400.75

Working at Height Equipment Available Online



Pole Jack Chain

High tensile link chain for use with Pole Jack



Item	Description	UoM	Price
700093	Pole Jack Chain	Each	£240.08

Chain Puller

Pump action ratchet chain winch for moving heavy loads and tensioning cables

- Safety brake incorporated
- Load can be maintained in any position



Item	Description	Capacity	Lift Height	Price
828424	Chain Puller	3 Tonne	1.5Mtr	£218.35

External Cabling

Strap Temporary Hold No.1

Used with Hook Temporary Hold No 2

- Supplied with a ratchet buckle



Item	Description	UoM	Price
200320	Strap Temporary Hold No.1	Each	£10.67

Hook Temporary Hold No.2

A temporary cable support when erecting and tensioning aerial cables

- Supplied complete with strap



Item	Description	Price
200107	Hook Temporary Hold No.2	£43.65

Tensioning Strap 1A

45mm Webbing strap, terminated with a 90 degree twist snap hook, used with Tensioner 3A for securing poles



Item	Description	Width	Length	Price
821829	Tensioning Strap 1A	45mm	3Mtr	£12.99

Tensioning Strap 2A

45mm webbing strap with a D buckle used for securing poles on pole erection units



Item	Description	Width	Length	Price
809582	Tensioning Strap 2A	45mm	6Mtr	£13.69

Tensioning Strap 3A

A ratchet tensioner fitted with a snap hook and anchor strap. Used with Tensioning Straps 1A & 2A.



Item	Description	UoM	Price
788469	Tensioning Strap 3A	Each	£29.54

Lifting Slings

Lifting slings for working at height

- 4A, 5A & 6A are flat webbing slings
- 10A is used for lifting & handling hollow pipes



821758 - 5A



821760 - 6A



200199 - 4A



200197 - 10A

Item	Description	BT Ref	Safe Working Load	Length	UoM	Price
200199	Lifting Sling	4A	1000Kg	1Mtr	Each	£7.40
821758	Lifting Sling	5A	1000Kg	2Mtr	Each	£11.36
821760	Lifting Sling	6A	1000Kg	3Mtr	Each	£12.44
200197	Lifting Sling	10A	1000Kg	3Mtr	Each	£9.90

FTTx Wedge Anchor Clamps

FTTx wedge anchor clamps offer dead-ending of FTTx cables on poles or facades for spans of up to 70m. Particularly recommended for round drop cables from 5mm to 8mm with rigid insulation.

- Simple and fast installation requiring no tools
- Especially designed for round distribution cables
- Suits all field configurations
- Install with zero bend radius constraints
- Mounting on all pole line hardware with closed eye and min. diameter of 15mm



Item	Description	Cable Type	Cable Dia.	Span Distance	Colour	UoM	Price
828422	FTTx Wedge Anchoring Clamp	Round Cable	5-6mm	Up To 70m Span	Black	Each	£4.07
828423	FTTx Wedge Anchoring Clamp	Round Cable	6-8mm	Up To 70m Span	Black	Each	£4.07

Fibre Locking Mechanism for Ultra-Lightweight Overhead Cables

The Fibre Locking Mechanism (FLM) is a locking mechanism essential for 'loose' jacketed element(s) in an overhead cable. The FLM provides an effective solution that isolates the termination of the fibres, either spliced or connectorised, in the fibre enclosure from the 'in span' environmental loading (ice and winding)

- Can be attached to a wooden pole with 4x No.8 x 1" countersunk pozi wood screws (820139)
- Designed to form a 'bridge' over other cables fitted to a pole



Item	Description	Style	Price
820214	Fibre Locking Mechanism	36F ULW OH Cable	£6.96

Over Head Cable Installation Tool

The Over Head Cable Installation Tool, also known as a Hybrid Cable Come Along, is used to hold and aid tension within a cable during installation

- Securely wraps around the pole with heavy duty chain
- Sturdy carabina to secure and hold tension during installation
- Hard wearing construction of cable grip housing
- Suitable for Hybrid Drop Tube



Item	Description	Mfr Ref	For Use With	Price
820206	Overhead Cable Grip (Come Along)	T0132	Hybrid Cable	£37.83

External Cabling

Grip Pulling Tool

Scissor action tool for pulling and holding aerial cables and wires during erection and tensioning

ALSO KNOWN AS
COME ALONG



Item	Description	Type	Size	Price
993092	Grip Pulling Tool	0.7T	3mm-8mm	£53.30
700124	Grip Pulling Tool	0.7T	4-12mm	£64.00

Dropwire Pulleys

A dropwire pulley is used in the erection or installation of dropwire cables. Available in two types, both are a one way snatch block type but pulley No.6 incorporates a clam cleat



Item	Description	BT Ref	SWL	Price
200149	Dropwire Pulley	No.4	70Kg	£36.42
790111	Dropwire Pulley	No.6	70Kg	£48.34

Copper Dropwire 10B

Used for wiring between distribution poles and building entry points

- 0.5mm solid copper conductors
- Integral steel support strands
- PE sheath



Item	Description	Type	Length	Price
770444	Dropwire 10B	CW1411	350Mtr	£75.79

Dropwire Protection Sleeve

PVC sleeve for securing dropwire strength members and preventing them from causing damage to the conductors

- Also known as BT Sleeve Dropwire Protection 2A



Item	Description	BT Ref	UoM	Price
991942	Protection Sleeve	2A	Pk of 100	£6.95

External
Cabling

NEW TOOL KITS AVAILABLE
SEE PAGE 66

Telescopic Clearance Rods

7 section telescopic glass fibre tubes for measuring height of overhead lines




Item	Description	Length	Price
992199	Telescopic Rod	6.5Mtr	POA

Dropwire Clamps

Coated stainless steel dead end for fixing drop wire at pole or premises' termination points. Clamps are designed to be wrapped around the dropwire not the wire around the clamp

- 992043 also known as BT Clamp Dropwire 10A

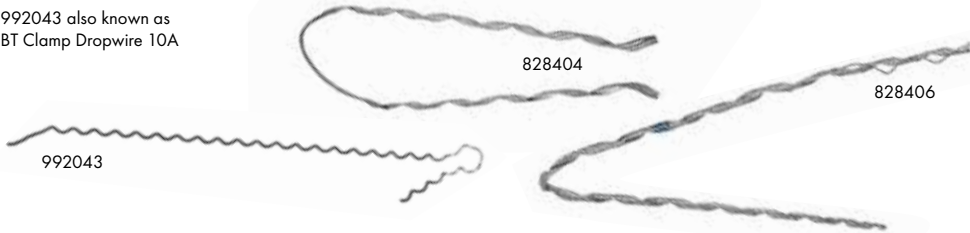

Item	Description	Cable Dia	Length	UoM	Price
992043	Aerial Cable Clamp	5.5mm	430mm	Each	£0.82
828404	Aerial Cable Clamp	-	914mm	Each	£24.25
828406	Aerial Cable Clamp	-	1200mm	Each	£26.19

PLP Drop Fibre Anchoring Clamps



These anchoring clamps have been designed for the new generation of ADSS cables with a micromodule structure. The radial force is distributed over a length with even pressure in order to minimise the strain on the cable and ensure long term performance life of optical fibres

- Available in a variety of sizes (3-3.9mm, 4.3-5mm and 5.4-6.2mm)




Item	Description	Type	Cable Dia	Band Colour	UoM	Price
828966	Anchoring Clamp	Fibre Dropwire	3-3.9mm	Orange	Pk of 10	£21.63
829087	Anchoring Clamp	Fibre Dropwire	4.3mm-5mm	Blue	Pk of 10	£21.63
829088	Anchoring Clamp	Fibre Dropwire	5.4mm-6.2mm	White	Pk of 10	£21.63

PLP Drop Fibre Dead Ends



Coated stainless steel dead end for fixing aerial fibre drop cables at pole or premises connection points. Clamps are designed to be wrapped around the dropwire not the wire around the clamp

- 830464 suited to 4F, 12F & 24F for ULW cables from 5.8-6.2mm
- 818157 suited to 36F & 48F ULW cables from 6.8-7.2mm

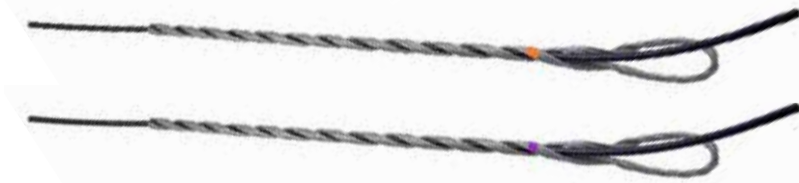

For
ULW Fibre
See Page 12

Item	Description	Cable Dia	Band Colour	UoM	Price
830464	Fibre Optic Dead End	5.8mm-6.2mm	Orange	Pk of 10	£22.00
818157	Fibre Optic Dead End	6.8mm-7.2mm	Purple	Pk of 10	£19.90

External Cabling

PLP Universal Pole Hardware Bracket



The universal pole hardware (UPH) allows the connection of a double anchoring with helical dead-ends and a suspension with a tangent support

- Suitable for a wide range of applications
- Fixed on pole with 1x M14 bolt or 2x 20mm stainless steel bands
- Weight 0.21 kg



Item	Description	UoM	Price
828982	Universal Pole Bracket	Each	£3.59

Universal Pole Bracket

A universal pole bracket suitable for all cable installation configurations on wooden, concrete or metal poles

- Suitable for a wide range of applications
- Secure using pole bands or bolt directly to pole
- Cast aluminium alloy for strength and corrosion resistance



Item	Description	UoM	Price
828391	Universal Pole Bracket	Each	£3.59

Hypocut Aerial Drop Cable Clamp

Enables the anchoring of flat aerial drop/ subscriber cables where spans do not exceed 70m

- Designed for Corning ROC drop and CommScope EX AXS drop cables
- Easy, quick and tool-less installation
- Opening bail for installation onto closed or opened hardware
- Installation without cables bending into the clamp
- Cutting load 1200N-1800N



Item	Description	Cable Type	Dia	Span Distance	UoM	Price
831602	Aerial Drop Cable Clamp	Flat ROC & EZ AXS Drop Cable	3x6mm	Up to 70m	Pack of 10	£31.05

Hypoclamp Aerial Drop Cable Clamp

The Hypoclamp also known as a slippery fish aerial cable clamp, is suitable for use with most flat cables

- Designed for installation of slippery fish cable, SST COF250 drop fibre cable
- For use on cables deployed on distribution networks with spans up to 70m
- Simple and fast installation that requires no tools
- Installation with zero bend radius constraints
- Mounting on all pole line hardware with closed eye and a min. diameter of 15mm



Item	Description	Cable Type	Cable Dia	Span Distance	UoM	Price
828418	Aerial Drop Cable Clamp, Hypoclamp F	Flat SST, COF250 Cable	4x8mm	Up To 70m Span	Each	£2.22

Drop Cable Wedge Anchoring Clamps

These drop cable wedge anchoring clamps enable single or double anchoring of round or flat drop cables. Single-piece thermoplastic drop clamp designed with a closed conical body shape and a tailored wedge connected to the body through a flexible link ensuring its captivity and an opening bail for easy installation to pole ring or mounts

- Cost effective, single-piece plastic design
- Simple and fast installation requires no tools
- Efficient cable grip by conical wedge
- Manual adjustment of the sag by blocking the wedge backwards
- Mounting on all pole line hardware with closed eye and min. diameter of 10mm
- Ideal for use on cross-arms, anchoring hooks, pole brackets and pigtail hook bolts



Item	Description	Cable Type	Cable Dia	Span Distance	Colour	UoM	Price
828452	Drop Cable Wedge Anchoring Clamp	Round Cable	2.5-5mm	Up To 70m Span	Black	Each	£1.93

Drop Cable Mandrel Clamps

These drop cable mandrel clamps are used for the dead-ending of round and flexible drop cables on poles and facades. The one-piece plastic construction is designed with a mandrel body shape in which cables can be coiled and self-tighten and has an opening bail that enables installation on pole line hardware with a min. diameter of 10mm

- Cost effective, single-piece plastic with compact design
- Simple fast installation requires no tools
- Unique securing solution for outdoor drop cables with insulated and flexible sheath
- Mounting on all pole line hardware with closed eye and min. diameter of 10mm



Item	Description	Cable Type	Cable Dia.	Span Distance	Colour	UoM	Price
828453	Drop Cable Mandrel Clamp	Round Cable	3-4mm	Up To 70m Span	Black	Each	£1.52
828454	Drop Cable Mandrel Clamp	Round Cable	4-6mm	Up To 70m Span	Black	Each	£1.51

External Cabling

AR600E Cable Height Meter

A handy portable ultrasonic meter for fast and accurate cable height measuring

- Standard set includes:
- Height meter
- Batteries
- Accessory bracket (horizontal distance measurement only)
- User manual
- Carry case



Item	Description	Mfr Ref	Price
810595	Digital Ultrasonic Cable Height Meter	AR600E	£286.35

Telescopic Cable Raising Prop

An insulated telescopic rod which can extend up to 6.2 metres. A temporary support for aerial drop cables needing maintenance

- Manufactured from non-conductive GRP
- Can collapse to a closed storage length of 1.95m
- A fabricated wire cage is mounted on the top of the rod to assist in gathering the cable prior to lifting and repositioning



Item	Description	Length	Price
832099	Cable Raising Prop	6.2Mtr	£399.50

Catenary Steel Wires

High tensile galvanised stranded steel wire

- Used for aerial cable suspension



Item	Description	Style	Type	Approx Break Load	Diameter	Length	Price
778482	Catenary Steel Wire	Galvanised	Seven Strand	650Kg	4.75mm	50Mtr	£32.21
992798	Catenary Steel Wire	Galvanised	Seven Strand	650Kg	4.75mm	100Mtr	£63.74

Catenary Wire Kit 3mm

A catenary wire cable support kit for installing overhead cables from poles or buildings

- Kit includes 50m x 4.75mm steel wire galvanised 7 strand rope
- 4 x Bulldog style wire grip
- 2 x Steel wire thimble
- 1 x Hook & eye tensioner
- 2 x 50mm wall plate



Item	Description	Length	Price
830600	Catenary Wire Kit - 3mm	50Mtr	£21.15

Catenary Wire Kit 5mm

A catenary wire cable support kit for installing overhead cables from poles or buildings

- Kit includes 50m x 4.75mm steel wire galvanised 7 strand rope
- 4 x Bulldog style wire grip
- 2 x Steel wire thimble
- 1 x Hook & eye tensioner
- 2 x 50mm wall plate



Item	Description	Length	Price
778485	Catenary Wire Kit - 5mm	50Mtr	£44.88

Tensioner 2B

A tensioning tool used during the erection and recovery of aerial cables

- Ratchet type tensioning tool
- Sprint latch hooks for secure attachment to cable and pulling equipment



Item	Description	BT Ref	Price
700119	Tensioner	2B	£93.06

Steel Wire Tensioner

Galvanised steel device for tensioning aerial suspension wires



Item	Description	Thread Size	Price
830571	Steel Wire Tensioner	8mm	£2.98
993800	Steel Wire Tensioner	12mm	£6.43

Steel Wire Thimble

Galvanised mild steel, standard pattern thimble for use with steel wire strand



Item	Description	Size	Price
830573	Steel Wire Thimble	4mm	£0.30
993407	Steel Wire Thimble	5mm	£0.31

Steel Wire Grips

Clamping device for use with steel wire strand, also known as bulldog grips



Item	Description	Style	Size	Price
830572	Steel Wire Grip	Bulldog Style	3mm	£0.36
992925	Steel Wire Grip	Bulldog Style	5mm	£0.41
993032	Steel Wire Grip	Bulldog Style	6.5mm	£0.46
990342	Steel Wire Grip	Bulldog Style	8mm	£0.66

Pole Step No 1

Steps for use on wooden poles only

- Also known as BT Step Pole 1



Item	Description	BT Ref	Price
992808	Pole Step	No.1	£2.90

Ring Pole Head Standoff 1A

Steps Pole No 1 with ring attached to accept various dropwire clamps and helical cable clamps

- Up to 5 dropwires maximum on joint user poles
- Allows safe passage past Openreach equipment for other providers
- 100mm ring diameter
- Used on wooden poles



Item	Description	BT Ref	UoM	Price
827593	Ring Pole Head Standoff	1A	Each	£6.70

Coach Screws

Coach bolt for use with pole steps 10mm dia



Item	Description	Length	Price
828992	Square Head Hex	85mm	£0.30
993001	Hex Head	75mm	£0.28

Coach Screw Brace

This handheld brace is used to attach and remove pole steps from poles

- For square head coach screws
- Easily remove pole steps
- Black and yellow handle



Item	Description	Price
100046	Brace Coach Screw	£26.50

External Cabling

Dropwire Polehead

Galvanised steel ring for distributing cables from pole tops

- Bolt diameter 16mm



Item	Description	Ring Dia	Price
992813	Polehead Dropwire Ring	240mm	£8.10

Probe Pole Test

Hardened steel 10 inch tool used to detect external decay on wooden poles

- Includes protective sheath



Item	Description	Price
789405	Probe Pole Test	£7.27

Dropwire Brackets

Galvanised steel brackets used in the fixing of drop cables, dropwires to poles or walls. All brackets have a loop to allow the attachment of various drop cable clamps or helical cable clamps

- All brackets must not exceed cable span distances of 68 metres



992041



992042



827594



827143

Item	Description	BT Ref	Height	Depth	UoM	Price
992041	Triangular Dropwire	Bracket 22	-	-	Each	£0.84
992042	Extended Dropwire	Bracket 32	-	-	Each	£4.29
827594	Extension Dropwire	Bracket 44	420mm	210mm	Each	£9.03
827143	Extension Dropwire	Bracket 51	600mm	350mm	Each	£19.89

External
Cabling

Wall Plate with Thimble

Galvanised steel wall plate for lightweight cables and wires



Item	Description	Width	Length	Price
993027	Wall Plate 5 with Thimble	150mm	100mm	£6.78

Expanding Eyebolts

Single point fixing ring bolt for terminating dropwire



Item	Description	Price
993797	Expanding Eyebolt 1A	POA
994088	Expanding Eyebolt 2A	POA
832766	Expanding Eyebolt 2B	POA
835080	Expanding Eyebolt 2C	POA

Pole Marking Discs

The plastic discs are used to designate telegraph pole identification

- Supplied in packs of 50 discs
- Known as BT 'Pole Marking'
- To be fixed using Nails Bonding (826833)
- Discs are 40mm in diameter



Pole Marking Letters - Pk of 50

A	B	C	D	E	J	L	M	N	P	S	T	W	Price
826653	826654	826655	826656	826657	826658	826659	826660	826661	826687	823048	826663	826664	£11.10

Pole Marking Numbers - Pk of 50

0	1	2	3	4	5	6	7	8	9	Price
823050	823055	823052	823051	823056	823053	823057	823058	823054	823057	£11.10

Aluminium Strips For Cable Cleating

Aluminium strips used on telegraph poles to secure dropwire cable every 450mm (18")

- Use in conjunction with nails bonding and galvanised washer 19 (available separately)



FOR PUNCH SETS
SEE PG 227



Item	Description	Length	UoM	Price
821725	Aluminium Strips	80mm	Pk of 25	£3.29
823039	Aluminium Strips	120mm	Pk of 25	£4.02
821428	Aluminium Strips	160mm	Pk of 25	£4.50

Galvanised Bonding Nails

Galvanised steel round headed nails to be used in conjunction with Galvanised Washer 19 for securing aluminium strip and cappings to poles

- Supplied in a 5kg box 45mm (L) x 5mm (Dia)



Item	Description	UoM	Price
826833	Galvanised Bonding Nails	5Kg Box	£21.34

Galvanised Flat Washers

Used with aerial cable fittings

- 20mm in diameter, with a 7mm hole, 1.6mm in thickness
- Used with Bonding Nail and Aluminium Strip to secure cables to wooden poles



Item	Description	Dia	UoM	Price
789104	Galvanised Washers 4	50mm	Pack 100	POA
788554	Galvanised Washers 19	20mm	Box 770	POA

Galvanised Tubular Washers

Used with hex-head bolts to secure Universal Pole Brackets (UPBs) to poles where the bolt is too long

- Tubular washers are 27mm in diameter
- For use with Bolts Hex Head



Item	Description	Length	UoM	Price
828387	Galvanised Washer 16	65mm	Box 50	POA
828388	Galvanised Washer 17	20mm	Box 100	POA
828389	Galvanised Washer 18	40mm	Box 100	POA

Pole Mount Bolts

Hex-head pole mount bolts

- For attaching Universal Pole Bracket (UPB), Hook Aerial Cable 1 and 1A to wooden poles




Item	Description	Dia	Length	Price
828394	Pole Mount Bolt Hex Head	M16	300mm	£3.06
828395	Pole Mount Bolt Hex Head	M16	350mm	£4.14

External Cabling

Galvanised Steel Capping

Formed galvanised steel channel for protecting cables

- Sized by max cable diameter
- Pre-drilled
- Delivery surcharge

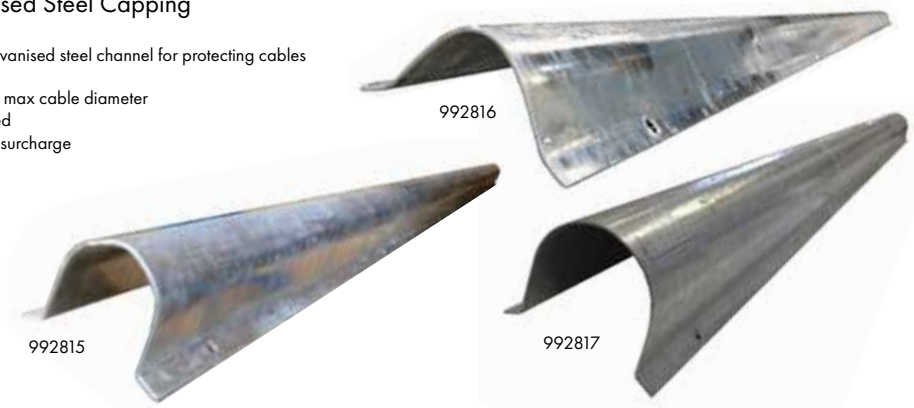

Item	Description	Cable Dia	Length	Price
992815	Steel Capping	19mm	2440mm	£16.61
992816	Steel Capping	50mm	2440mm	£20.40
992817	Steel Capping	75mm	2440mm	£28.37

Connector Bend No 1 – Metal Capping Adaptor

Galvanised steel boot for protecting cable between capping and duct (90mm)

- Also known as Elephants Foot
- Suitable for use with 19mm capping



Item	Description	Type	Price
992812	Capping Adaptor	19mm Capping Only	£4.52

Plastic Capping

Durable plastic channel for protecting smaller cables installed on poles and walls

- Pre-drilled
- Delivery surcharge
- 992818 Also known as BT Capping 22



Item	Description	Cable Dia	Length	Price
992818	Plastic Capping	19mm	2440mm	£3.91
992820	Plastic Capping	42mm	2440mm	£8.77
782629	Plastic Capping	50mm	2440mm	£14.31

Nail Capping Masonry Pins

Masonry nails suitable for concrete, block, brick or timber

- Zinc plated carbon steel with inbuilt washer
- Also known as BT Nails Capping Masonry Steel Pin 2



Item	Description	Style	Length	Price
793881	Nail Capping Masonry	Pin Steel 2	7/8"	£4.90
793882	Nail Capping Masonry	Pin Steel 2	1 1/8"	£5.00

FTTx Engineering Catalogue




THE PERFECT COMPLEMENT TO OUR
CONTRACTORS CATALOGUE

External Cabling

PIANOI Cabling Labels

For the identification of newly provided cables

- Made from a UV stable weather resistant materials
- 4x 6mm pre cut holes for affixing into position using cable ties
- Fields to be completed using fine permanent marker - BT Pen Marker 1 (994344)



Marker Pen
994344

Item	Description	UoM	Price
829650	PIANOI Label	Pk of 250	£67.09

NEW

PIANOI LABELS



WHEN PERFORMANCE MATTERS MOST™




now printable via the
**BRADY BMP61 HANDHELD
PRINTER**

See pg 262 for details

External
Cabling

Pre-Climb Pole Labels

Tear-proof label affixed to telegraph poles to mark pre-climb inspection check

- Available in 2 versions, one with 2 fixing holes for attaching to wooden poles (825949) and a self-adhesive version for use on GRP or Fiberglass poles (831310)
- For fixing 2 hole version, secure using Pin Steel 2 (793882)
- 90mm (L) x 40mm (H)



Item	Description	UoM	Price
825949	Non-Adhesive (2-hole)	Pk of 50	£10.97
831310	Self-Adhesive (no holes)	Pk of 50	£4.96

Pole Test Labels

Pole test labels used when inspecting telegraph poles

- Used as part of the pre-climb test
- Typically applied 4" from the base of the pole



Item	Description	UoM	Price
826085	Pole Test Label	Pk of 10	£7.65

Defective Pole Labels 1024

These A1024 labels are used to identify and record defective poles

- Four holes allow the label to be easily affixed to the pole using Pin Steel No 2 (793882)



Item	Description	UoM	Price
828386	Defective Pole Label A1024	Pk of 10	£6.10

Caution Overhead Fibre Labels

To be affixed to wooden telegraph poles where overhead fibre cable is present



Item	Description	UoM	Price
831135	Caution Label - Self Adhesive	Pk of 10	£4.07
826084	Caution Label - Non Adhesive	Pk of 10	£9.52

Letters & Numbers Punch Set

Upper case letter and number punch
26 piece stamp set

- Hardened and tempered
- Wooden storage box
- 0-9, A-Z



Item	Description	Price
829985	Letters & Number Punch Set	£16.92

Letters & Numbers Punch Set

Includes punch holder (up to 9 positions)


- 52 Letters A-Z (2 of each)
- 37 Numbers 0-8 (4 each 0-8, 5x 6(9))
- 1x &, 2x /, 2x - & 6 blanks
- Holder material: SCM40
- Steel punch material: CRV(6150)



Item	Description	Price
831702	Letters & Number Punch Set	£199.90



BUILD FOR TODAY WITH TOMORROW IN MIND

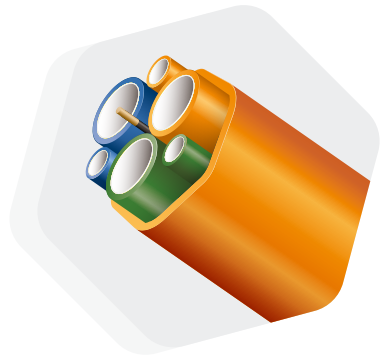

Choose flexible, scalable MicoTechnology for:

More capacity, same footprint as traditional ducts



Quick & simple future upgrades



PIA compatible solutions




Easy capacity leasing for faster return on investment



Cost-effective 5G-ready networks



Collaborative deployment models, such as "Dig Once"

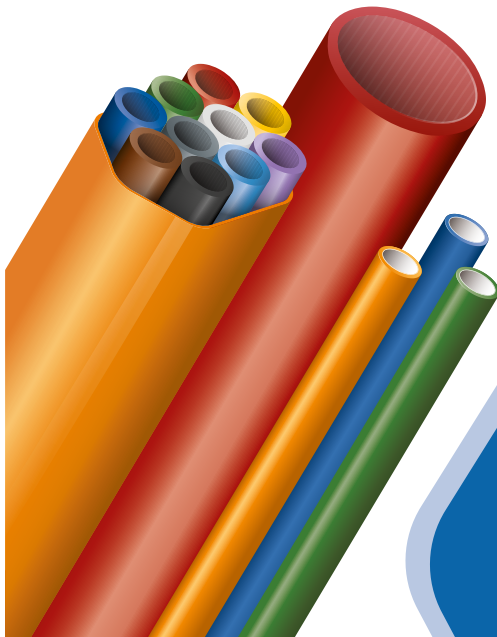

Dura-Line is the leading global manufacturer of communication infrastructure products including conduit, MicroDucts and accessories. With over 50 years of experience, strong production capabilities, and high-quality standards, Dura-Line is perfectly poised to support MicroDuct deployments across the UK.

www.duraline-europe.com / Europe.Sales@duraline.com

Prysmain CasaLink Block Terminal (CBT) Closures

Prysmain's CasaLink Block Terminal (CBT) is a pre-connectorised closure for use in the external environment and the ideal solution for pole mount or wall mount fibre distribution

- Available in 4, 8 and 12 drops/ports
- Compact IP68 rated design
- Quick and easy access, very easy to install
- Supplied pre-terminated with 100Mtrs of ULW fibre cable
- Always comply to PIA rules and procedures when installing cables



827834



827835



827836

Prysmian

A Brand of Prysmian Group

Item	Description	Type	Ports	Connector	Mfr ref	Colour	UoM	Price
827834	CasaLink Block Terminal	Pre-Cabled	4 Port	SC/APC	XCPSC03741	Black	Each	£121.99
827835	CasaLink Block Terminal	Pre-Cabled	8 Port	SC/APC	XCPSC03740	Black	Each	£132.27
827836	CasaLink Block Terminal	Pre-Cabled	12 Port	SC/APC	XCPSC03926	Black	Each	£163.41

Prysmian CasaLink Block Terminal (CBT) Drop Cables

Prysmain's CasaLink Block Terminal (CBT) drop cables have been designed as a single fibre drop cable, pre-terminated at one end with an SC/APC connector. The terminated end is secured in to Prysmain's CBT closures and the bare end spliced in the customer premise or in an external termination box

- Single fibre ULW PIA approved cable
- Pre-terminated SC/APC connector with shroud and pulling eye
- Supplied on wooden reel for ease of installation
- Available in 20m, 35m, 65m, 105m, 160m and 350m lengths
- Always comply to PIA rules and procedures when installing cables



Item	Description	Type	Connector	Fibre	Standard	Mfr ref	Length	Price
827838	CasaLink Block Terminal	Drop Cable	SC/APC	1 Fibre	G657A1	XPCSC01138	20Mtr	£36.93
827839	CasaLink Block Terminal	Drop Cable	SC/APC	1 Fibre	G657A1	XPCSC01141	35Mtr	£42.63
827840	CasaLink Block Terminal	Drop Cable	SC/APC	1 Fibre	G657A1	XPCSC01214	65Mtr	£53.72
827841	CasaLink Block Terminal	Drop Cable	SC/APC	1 Fibre	G657A1	XPCSC01215	105Mtr	£69.38
827842	CasaLink Block Terminal	Drop Cable	SC/APC	1 Fibre	G657A1	XPCSC01159	160Mtr	£89.54
827843	CasaLink Block Terminal	Drop Cable	SC/APC	1 Fibre	G657A1	-	350Mtr	£148.29

Prysmian

A Brand of Prysmian Group

Prysmian CasaLink Block Terminal (CBT) Accessories

Accessories designed to aid and ease the installation of the casaLink block terminal (CBT) product range

- Drop cable termination kits for 3mm & 6mm cables so non-proprietary product can be used
- Drop cable connector tool used to loosen and tighten the connector shroud
- Pole strap kits made from stainless steel for extra strength fixing



827846/7



827844



827845

Prysmian

A Brand of Prysmian Group

Item	Description	Type	Mfr ref	UoM	Price
827846	CasaLink Block Terminal	Drop Cable Termination Kit 6mm	XKTSC01442	Each	£30.92
827847	CasaLink Block Terminal	Drop Cable Termination Kit 3mm	XKTSC01443	Each	£21.83
827844	CasaLink Block Terminal	Connector Tool	XKTSC01437	Plk of 5	£32.02
827845	CasaLink Block Terminal	Pole Strap Kit	XCPSC03749	Plk of 2	£4.62

External Cabling

Corning OptiSheath Multipurpose Enclosures (MPE)

CORNING

A multi-functional in-line closure designed for use in outside plant fibre access networks. This pre-connectorised closure provides sealed environmental protection and fast, easy incremental connection of subscriber drop cables while increasing deployment speed in just the same way as can be achieved using a Corning multiport terminal. However, the MPE sealed terminal has the added advantage of serving as a splice point where higher fibre count distribution cables can be branched to lower fibre count cables or to the stubbed cables of multiport terminals

- OptiTap cable assembly connector ports for customer drop terminations
- IP68 rated faster deployment either pole or underground application
- Available in 8, 12, or 16 drop port styles
- Suitable for pole mount, wall mount, chamber mount or direct bury installation
- Can be fitted with mini PLC splitter for PON applications
- Supplied with 6x 7-10mm sealed grommet inputs, splice trays and accessories



Item	Description	OptiTap Ports	Splitter	UoM	Price
821620	OptiSheath Multipurpose Enclosure	8x OptiTap Ports	1x 1:8 Splitter	Each	£148.94

Corning OptiSheath MultiPort Terminal

CORNING

Designed for external fibre access networks. Its reliability and flexibility, with incremental subscriber drop ports, make it the ideal choice for FTTx deployments. Supplied in various lengths and pre-terminated with Corning's SST drop cable which is dedicated for installation in conduits, ducts, racks and aerial applications

- Utilises the OptiTap cable assembly connector port terminals (SC/APC)
- Pre-terminated with Corning SST flat dielectric drop cable
- Available in 4, 8 & 12 drop variations
- Supplied on reel with MOBRA fixing
- Alternate drop lengths available from 1Mtr to 350Mtr



	15Mtr	50Mtr	100Mtr	150Mtr	350Mtr
4 Port	826599	828047	833816	833817	833821
	£105.73	£119.50	£129.89	£148.23	£221.64
8 Port	826600	826548	833822	833823	833827
	£151.90	£169.91	£182.58	£206.59	£302.59
12 Port	826601	828066	833828	833829	833833
	£198.73	£220.82	£235.53	£264.97	£382.75

Back to Back Hinged CBT Pole Bracket

A bracket to create additional space on the pole for 3x CBT's

- 2 way bracket is hinged to aid installation
- 3 way bracket can be used on poles or in chamber installations
- Suitable for 4, 8, & 12 Way Corning or CommScope CBT's
- Increase pole footprint allowing up to 36 drop cables from the same space
- Includes 4x 3mm, 8x 4mm and 4x 6mm captive nuts for various CBT fixing points



Item	Description	Other	UoM	Price
828972	2 Way CBT Pole Bracket	Hinged	Each	£36.35
829187	3 Way CBT Pole Bracket	Fixed	Each	£49.95

Standoff Bracket Multiport/MOBRA

CORNING

Multiport CBT standoff bracket allows additional space between surface and CBT.

- Pole and wall mount application
- Also allows mounting of Multiport CBT on a mobra arm (extra materials required)



Item	Description	Type	Colour	UoM	Price
822196	Standoff Bracket	Multiport / MOBRA	Black	Each	£1.11

Corning ROC OptiTap Drop Cables

CORNING

Corning's ROC Aerial Drop fibre cables with factory terminated OptiTap connection at one end have been designed as an aerial, pole drop cable. FastAccess technology allows the easy removal of the outer jacket reducing preparation time for splicing and terminating

- SC/APC OptiTap connector
- ClearCurve singlemode fibre
- Designed for aerial and pole application
- Supplied in card boxes
- FastAccess technology for reduced preparation time



Item	Description	Type	Connector	Fibre	Mode	Standard	Length	Price
826551	ROC Drop	OptiTap Cable	SC/APC	1F	SM	G657A2	35Mtr	£31.16
826562	ROC Drop	OptiTap Cable	SC/APC	1F	SM	G657A2	65Mtr	£45.28
826553	ROC Drop	OptiTap Cable	SC/APC	1F	SM	G657A2	105Mtr	£64.12
826563	ROC Drop	OptiTap Cable	SC/APC	1F	SM	G657A2	160Mtr	£90.01


Evolv™ Solutions

Designed to Go Anywhere


CORNING




Go Faster
"Stick & Click"

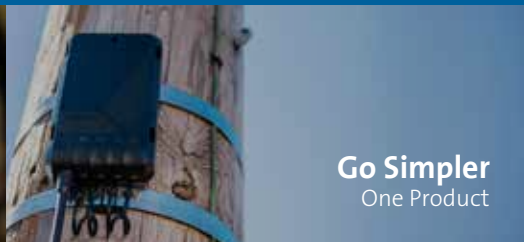

Go Simpler
One Product

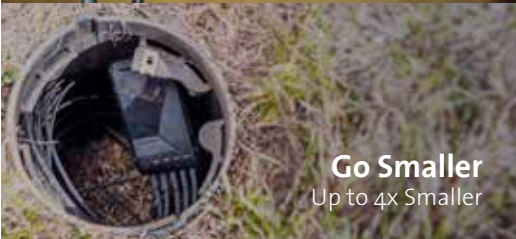

Go Smaller
Up to 4x Smaller



Go Anywhere
Save Time, Space,
Infrastructure &
Inventory

External
Cabling

External Cabling

EM-Wrap Closure

EM-Wrap closure can be used universally over a multi tube bundle diameters from 20mm upto 40mm (Including Connectors). Can be used as a protective barrier for straight joints and branch joints when branching microducts

Single kit contains single layer EM-Wrap :

- 4 x large cable ties

Double kit contains double layer EM-Wrap :

- 2 x rolls of amalgamating tape
- 3 x releasable cable ties (in 829417)
- 2 x large cable ties (6 x ties in 833229)
- Operating temp -25 deg to +60 degrees C
- Ideal for 20mm - 40mm microduct bundles



Item	Description	Length	Price
831134	EM-Wrap Single Layer	40cm	£19.99
829417	EM-Wrap Double Layer	30cm	£32.90

Prysmian Small Joint Closure (SJC)

A 4 port closure designed for track and branch applications

- IP68 rated for water & dust tightness
- Supplied with four knock-out ports and two entry glands
- Suitable for up to 24 fibre splices using 2.2mm protectors
- Single 24 fibre tray and additional management plate
- Each port accommodates a cable gland for cables 5-9mm or 6-12mm diameter
- Additional glands available separately



Prysmian

A Brand of Prysmian Group

Item	Description	Fibres	Port Style	Mfr Ref	UoM	Price
821517	Small Joint Closure	24F	5-9mm Cable	XJTSC02335	Each	£26.38

Prysmian Ultra Compact Multi-Function Joint Closure (UMJ)

Designed to be used as cable chamber joint, track joint, spur joint or distribution joint and can accommodate up to 72 Fibre splices. A very robust and compact joint suitable for wall or pole mount applications

- Ultra compact closure offering up to 72 fibre splices
- Fitted with 6 single element splice trays, each accommodating 12 splices per tray
- An integral input manifold manages the tubes to a common routing channel and has the provision for mounting two optical splitters
- 4 circular ports and an oval port for cables up to 23mm diameter
- 2 additional smaller emergency ports suitable for cables up to 12mm diameter
- Can be supplied with pole or wall mount bracket for vertical and horizontal application



Prysmian

A Brand of Prysmian Group

Item	Description	Mfr Ref	Use	UoM	Price
824973	Ultra Compact Multi-Function Joint Closure	UMJ-F-X-XXXX-X-X-X	2.2mm Protectors	Each	£47.69

Prysmian Compact Multi-Function Joint Closure (CMJ)

Designed to be used as a cable chamber joint, track joint, spur joint or a distribution joint and can accommodate up to 144 fibre splices. A very robust high capacity fibre joint in a compact size

- Compact closure offering up to 144 fibre splices
- Fitted with 12 single circuit splice trays, each accommodating 12 splices per tray
- 4 circular ports and an oval port for cables up to 23mm diameter
- Can be supplied with pole or wall mount bracket and optional pressure test valve
- Other port entry kits available



Prysmian

A Brand of Prysmian Group

Item	Description	Mfr Ref	Use	UoM	Price
814189	Compact Multi-Function Joint Closure	CMJ-F-X-XXXX-X-X-X	2.2mm Protectors	Each	£57.98

OTHER CONFIGURATIONS AVAILABLE

Prysmian Medium Multi-Function Joint Closure (MMJ)

The Prysmian Medium Multi-Function Joint Closure (MMJ) has a capacity of up to 288 fibres and is ideally suited for use as a cable chamber joint, track joint, spur joint or distribution joint

- Compact closure offering up to 288 fibre splices
- Fitted with 24 single element splice trays, each accommodating 12 splices per tray
- 4 circular ports and an oval port for cables up to 23mm in diameter
- Can be supplied with pole or wall mount bracket and optional pressure test valve
- Other port entry kits available



Prysmian

A Brand of Prysmian Group

Item	Description	Mfr Ref	Use	UoM	Price
814212	Medium Multi-Function Joint Closure	MMJ-F-X-XXXX-X-X-X	2.2mm Protectors	Each	£74.34

OTHER CONFIGURATIONS AVAILABLE

Prysmian Large Multi-Function Joint Closure (LMJ)

Ideally suited for use within the external optical network and can be used for track joint, spur joint and loop applications

- Large optical network closure with a standard splice capacity of 960 splices and above
- Mechanical oval port and central loop storage for up to 276 fibres using loose tube
- Two vertical splice tray stacks
- 10 circular ports and 1 mechanical oval port for cables up to 23mm in diameter
- Various mechanical cable entry glands available for multiple cable entry options
- Can accommodate a range of splitter modules from 1:2 to 2:64
- Closure is rated to IP68 sealed



Prysmian

A Brand of Prysmian Group

Item	Description	Cap Version	Trays	Mfr Ref	Colour	UoM	Price
814256	Large Multi-Function Joint Closure	Medium Cap	80 Tray (40+40)	XTSC02366	Black	Each	£216.20

External Cabling

Prysmian CMJ Oval Port Heat Shrink Entry Kits

Prysmian

A Brand of Prysmian Group

Used to install a loop of cable into the oval port of the smaller family of xMJ joints (except the LMJ)

- Contains all of the components required to prepare and install cable and route to the splice tray



Item	Description	Cable Range	Joint Type	Mfr Ref	UoM	Price
820483	Oval Port Heat Shrink Entry Kit	5-14.8mm	UMJ/CMJ/MMJ	XJTSC01756	Each	£23.64

Prysmian Oval Port Mechanical Entry Kits

Prysmian

A Brand of Prysmian Group

Used to install a loop of cable into the oval port of joint closures

- Available for the LMJ or UMJ/CMJ/MMJ joint closures
- Each kit contains all components required to prepare and install cables and route fibres to the splice trays
- Cable sealed into the oval port using a mechanical gland system comprising of two plates and rubber block
- Each kit is specific to cable size indicated



Item	Description	Entry Type	Cable Range	CMJ	LMJ	MMJ	UMJ	Mfr Ref	Price
814268	Oval Port Mechanical Entry Kit	Loop Cable	6-8mm		✓			XJTSC02382	£16.01
814269	Oval Port Mechanical Entry Kit	Loop Cable	8-10mm		✓			XJTSC02269	£16.83
814261	Oval Port Mechanical Entry Kit	Loop Cable	10.1-12mm		✓			XJTSC02270	£17.70
814263	Oval Port Mechanical Entry Kit	Loop Cable	11.5-17.5mm		✓			XJTSC02185	£18.51
814271	Oval Port Mechanical Entry Kit	Loop Cable	5-7mm	✓		✓	✓	XJTSC02028	£18.67
814272	Oval Port Mechanical Entry Kit	Loop Cable	7-9mm	✓		✓	✓	XJTSC02029	£19.50
814270	Oval Port Mechanical Entry Kit	Loop Cable	11-13mm	✓		✓	✓	XJTSC02031	£19.50

Prysmian Circular Port Cable Entry Glands & Tools

Used to install cables into one of the 10 ports of a joint closure base. The glands are mechanical in nature and can be installed onto the cable and then simply pushed into the base of the joint

- Each kit contains all parts necessary to seal the cable and secure the strength member of cables
- Multi-way glands are useful when installing a number of smaller cables into one circular port
- For larger cables use a Oval Port Kit

Prysmian

A Brand of Prysmian Group



Item	Description	Entries	Cable Range	For Use With	CMJ	LMJ	MMJ	UMJ	Mfr Ref	Price
814278	Circular Port Entry Gland	1 Way	7-20mm	CSM/Aramid Cables	✓	✓	✓	✓	XJTSC01754	£12.88
814279	Circular Port Entry Gland	1 Way	20-23mm	CSM/Aramid Cables	✓	✓	✓	✓	XJTSC02193	£13.56
816064	Circular Port Entry Gland	2 Way	5-9mm	Cables or Conduit	✓	✓	✓	✓	XJTSC02186	£10.34
814190	Circular Port Entry Gland	4 Way	4-6mm	CSM Mini Cables	✓	✓	✓	✓	XJTSC02767	£12.09
814281	Circular Port Entry Gland	4 Way	5-7mm	Aramid Cables	✓	✓	✓	✓	XJTSC01755	£10.32
814274	Circular Port Entry Gland	4 Way	5-7mm	CSM Mini Cables	✓	✓	✓	✓	XJTSC02768	£13.16
814275	Circular Port Entry Gland	4 Way	7-8.5mm	CSM Mini Cables	✓	✓	✓	✓	XJTSC02769	£13.75
814276	Circular Port Entry Gland	8 Way	3mm	Cables or Conduit	✓	✓	✓	✓	XJTSC02260	£14.70

Prysmian Joint Closure Accessories

A selection of Prysmian joint closure accessories to aid installation

- Silicone grease for use with joints, enclosures and port entry kits
- Gland spanners and port removal tools to aid installation and removal of port kits
- Workstation support brackets designed to hold joint enclosures and make installation quicker and easier
- Anti-creep device used to anchor central loose tube fibre installed between helical tension clamp and joints or buildings

Prysmian

A Brand of Prysmian Group



Item	Description	For Use With	Mfr Ref	UoM	Price
821519	Cable Entry Kit (6-12mm)	SJC Enclosures	XJTSC02471	Each	£3.53
814284	Wall/Pole Mounting Bracket	LMJ Joints	XJTSC02597	Each	£27.70
814286	Handle Kit	LMJ Joints	XJTSC02548	Each	£10.29
814285	Workstation Support Tool	LMJ Joints	XJTSC02274	Each	£81.24
814283	Workstation Support Tool	UMJ/CMJ/MMJ Joints	XJTSC00075	Each	£58.31
821141	Anti-Creep Device	-	XTSC00004	Each	£6.21

External Cabling

Corning Fibre Sheath & Buffer Stripper

CORNING

Precision tool for easy and precise stripping of primary and secondary coating

- Insert wire in front hole, squeeze handle and strip with no nicking
- Blue is for primary 250µm coating removal



Item	Description	Mfr ref	Price
828509	SST-Drop Cable Access Tool	FDST-000	£51.14

Commercial or Residential MDU, we have you covered

Call 01480 415414



Corning OptiTap Test Jumper

CORNING

Enables direct connection to optical power meters for in-field testing

- Environmentally sealed connector housing permits rapid connection to external flush-mounted bulkhead adapters on terminals or closures



Item	Description	Type	Mode	Connectors	Standard	Core Size	Sheath	Dia	Colour	Length	Price
813460	OptiTap Test Jumper	Simplex	SM	SC-SC/APC	OS2	9/125	LSZH	2.9mm	Yellow	3Mtr	£39.99
820701	OptiTap Test Jumper	Simplex	SM	SC-SC/APC	OS2	9/125	LSZH	2.9mm	Yellow	10Mtr	£41.27

Prysmian Hybrid Drop Box (HDB4)

Prysmian

A Brand of Prysmian Group

The wall mounted Prysmian Hybrid Drop Box (HDB4) is used for the splicing of up to 4 fibres and up to four customer drop cables

- Added feature of a copper storage area to accommodate hybrid cables
- Capacity for up to 4 splices and can accommodate cables from 3mm to 7mm in diameter
- Box supplied with an extra knock-out port on the back to allow for 'through' wall applications
- Can be installed on a wall (fixtures included) or onto standard 'Connector Bend 4' system to hide primary cable routings
- Supplied with two 3-7mm single input cable seals and two double cable drop port kits
- Can accommodate two SC Simplex adaptors or two LC Duplex adaptors
- Supplied with everything to install one input cable and four drop cables, except splice protectors
- IP55 rated - suitable for internal or external use



Shown with SC for reference

Item	Description	Type	Other	Mfr Ref	Price
828149	Hybrid Drop Box (HDB4)	2x LC/APC Dx	C/w Adaptors & Pigtails	XCPSC03044	£30.91
820510	Hybrid Drop Box (HDB4)	2x SC/APC Sx	C/w Adaptors & Pigtails	XCPSC03043	£16.92
820509	Hybrid Drop Box (HDB4)	Splice Only	-	XCPSC03029	£9.81

HellermannTyton Fibre Wall Outlets



HellermannTyton fibre wall outlets are manufactured from ABS plastic and have been design with tamperproof latches securing the cover to the base. The FWO range is supplied with a 2 fibre G657A1 10Mtr cable with 1 core pre-terminated with an LC/APC connector

- Fitted with 1x LC/APC duplex fibre adaptor
- Includes 10Mtr 2 fibre pre-terminated G657A1 cable with 1x LC/APC connector
- Direct installation on wall or onto a flush-mount back box
- Tamperproof latches
- Fibre management to ensure 30mm min bend radius



Item	Description	Ports	Cable Type	Termination	Mfr ref	Price
828150	Pre-Terminated Fibre Wall Outlet	Duplex LC/APC Adaptor	2F G657A1	1F LC/APC	FWOA-AXW21-010/WH	£24.83

HellermannTyton External Fibre Optic Enclosures



HellermannTytons external enclosures are suited to fibre optic termination, distribution and consolidation installations. These include Customer Connection Points (CCP), customer enclosures and Multi Dwelling Units (MDU/MBU) enclosures. These ranges are suited to FTTx installations and deployed within the last mile of the FTTx networks


- Customer connection enclosures are rated to IP68 and designed as a building entry point
- MDU/MBE enclosures are rated to IP55 and designed for last mile network deployment
- Contain suitable cable management to maintain correct bend radius of fibres



828157




828158

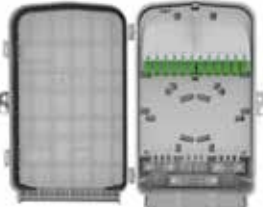

828166



828167



828168

Item	Description	Type	Other	Mfr Ref	Price
828157	Customer Connection Point (CCP)	1x LC/UPC Dx	C/w 2x LC OS2 Pigtails	CCPA-M111 LP/BK-0	£15.75
828158	Customer Connection Enclosure	LC/APC	C/w 1x LC/APC Dx Adaptor & Pigtail	CCE-A11121A11/BK	£19.23
828166	S1 Series MDU/MBU Enclosure	LC/APC	C/w 12x LC/APC Sx Adaptor & Pigtail	MDU-S1-03LC12RA1	£119.18
828167	S3 Series MDU/MBU Enclosure	Splice Only	96F Capacity	MDU-S3-BXN	£96.26
828168	S5 Series MDU/MBU Enclosure	Splice Only	432F Capacity	MDU-S5-LXN	£296.16

External Cabling

BT Cable Entry Covers

Cable entry cover and capping for running telephone cabling into a premises.

- BT Cover 101A covers cable entry on house wall (Cover dimensions 105mm x 78mm x 28mm)
- BT Capping 25 runs between connector bend 4 & cover 101A to enclose service cable
- BT Connector Bend 4 for use on housing estates to connect duct 102 or duct 56 to cover 101A. Also known as an 'Elephants Foot'



802285



802283



802284



Item	Description	Length	UoM	Price
802285	BT Cover 101A		Each	£4.38
802283	BT Capping 25	500mm	Each	£3.30
802284	BT Connector Bend 4		Each	£3.24

Universal Cable Entry Covers

Cable entry fascia for protecting/covering cable entry into an external wall

- Suitable for coaxial, satellite and electrical cables
- Hides broken and chipped bricks as well as helping to prevent water ingress



803680



786451



803681



786450

Item	Description	Colour	Price
803680	Cable Entry Cover	Black	£0.45
786451	Cable Entry Cover	Red	£0.45
803681	Cable Entry Cover	Stone	£0.45
786450	Cable Entry Cover	White	£0.45

Resin 2B

2 Part component polyurethane compound specifically formulated for use in the construction of vertical air blocks in pressurised telecommunication cables

- Curing time: 4 hours



Item	Description	Weight	Price
993977	Resin 2B	450g	£11.23

Resin 6C

Resin for sealing cabinet bases

- 2 Part component polyurethane compound specifically formulated for use as a sealant against the ingress of moisture into the concrete bases of cabinets cross-connection
- Gel/set time: 2hrs/24hrs



Item	Description	Volume	Price
789132	Resin 6C	3.3Ltr	£26.83

Resin 9B

2 Part component polyurethane compound specifically formulated for the sealing of polyethylene sheathed telecommunication cables into the bases of sleeves 30A, 31A and 32A. It is also used in fibre optic closures



Item	Description	Volume	Price
996773	Resin 9B	110ml	£6.54

Resin 10B

2 Part polyurethane resin for closure sealing and repairs

- Gel/set time: 6min/20min
- Very Hard / permanent sealant for sealing sleeves 30A, 31A and 32B



Item	Description	Price
789133	Resin 10B	£11.48

Duct Sealant 16A

Compound 16A is a single component non-curing mastic specifically designed for sealing against gas and water in underground conduits carrying telephone cables



Item	Description	UoM	Price
991803	Duct Sealant 16A	1Kg	£6.79

Putty Sealant DX5

Duct sealing putty highly resistant to cracking, drying and shrinking

- For sealing around junction boxes, service cable entries and other similar applications



Item	Description	Weight	Price
994012	Putty DX5	5x454g	£15.34

Desiccant Pack 2A

Used to dry out unventilated cabinets

- Also known as BT Desiccant Pack 2A



Item	Description	BT Ref	Weight	Price
801805	Desiccant Pack	2A	110grams	£1.59

Cabinet Base Sealant

2 component sealant used to seal the base & ducts in Virgin Media's street cabinets

- Quick and easy to apply
- Seals the cable ducts against water & gas pressures



Item	Description	Volume	Price
810662	Cabinet Base Sealant	2500ml	£34.80

External Cabling

Contractors Tube Sealants

All purpose flexible sealant with excellent waterproofing quality

- Contains mould inhibiting fungicide
- High movement accommodation



Item	Description	Volume	Colour	Price
440041	Silicone Sealant	280ml	Brown	£3.49
440043	Silicone Sealant	280ml	White	£3.69

Silicone Sealant

All purpose flexible sealant with excellent waterproofing quality

- Fitted with a nozzle and cap
- Contains mould inhibiting fungicide



Item	Description	Volume	Colour	Price
823749	Silicone Sealant	300ml	Clear	£3.65

Caulking Gun

Caulking gun for easy application of sealant or adhesives

- Handle combines plunger and release clip
- Max capacity 400ml



Item	Description	Type	Mfr Ref	Price
100185	Caulking Gun	Heavy Duty	CG200	£4.95

22 Acrylic Sealant

A fire resistant, intumescent acrylic sealant that forms a durable, flexible and resilient acoustic seal

- 4 Hours fire resistance
- Independently fire tested and assessed
- Non-toxic, low smoke, halogen free
- Good adhesion to most common building materials



Item	Description	Compound	Volume	Colour	Price
788073	Firebreak 22	Fire Resistant & Accoustic Acrylic Sealant	310ml	White	£4.12

Firebreak Fire Resistant Sealant

One part, fire resistant, neutral curing silicone sealant to be used where a flexible fire resistant joint is required

- 4 Hours fire resistance
- Independently fire tested
- Excellent adhesion to most building substrates
- Low smoke
- Class 1 flame spread characteristics



Item	Description	Compound	Volume	Colour	Price
786981	Firebreak 33	Fire Resistant Silicone Sealant	310ml	Grey	£7.50

55 Fire Resistant Putty

One part, non-setting fire resistant intumescent compound designed for sealing gaps around services penetrating fire resistant construction

- Sealing cables within trunking when passing through fire separating walls and floors
- Gaps around metal pipes penetrating fire separating walls and floor gaps around electrical cables penetrating fire separating walls and floors
- Seals around penetrating services where accommodation of thermal or mechanical movement is required
- Seals around penetrating services where frequent modification is required



Item	Description	Compound	Weight	Price
786980	Firebreak 55	Intumescent Putty (non-setting)	1 Kg	£17.10

FIREBREAK SERVICE TRANSITS ALSO AVAILABLE



Fire Bags

Heavy duty re-useable glasscloth bags containing blended mineral wools and heat expandable fillers

- Can be used to provide up to 2 hours fire resistance to services penetrating fire resistant wall and floor constructions
- Temporary seals around penetrating services through openings in fire separating walls and floors; for example, during the construction phase of large building projects
- Permanent reusable seals around penetrating services through openings in fire separating walls and floors where frequent service modification is required
- Sealing cables within cable trunking where future service modification is expected



Item	Description	Size	Width	Depth	Length	Price
786982	Fire Resistant 'Pillow' Bag	Small	50mm	20mm	330mm	£6.49
786983	Fire Resistant 'Pillow' Bag	Medium	200mm	25mm	330mm	£8.95
786984	Fire Resistant 'Pillow' Bag	Large	200mm	45mm	330mm	£9.01



External Cabling

Expanding Foam Sealant

A high expansion yield, polyurethane filling and insulation foam

- CFC free
- Fire rated Class B2



Item	Description	Style	Volume	Price
774220	Expanding Foam	Fire Resistant	750ml	£7.73

All Purpose Filler



Ready mixed filler for internal/external repairs

- Water resistant when set
- Drillable when set



Item	Description	Weight	Price
774221	All Purpose Filler	600g	£3.69

Epoxy Resin

A two part epoxy resin glue by Araldite which will bond ceramics, wood, chipboard, glass, metal and most hard plastics

- Repositionable for up to two hours
- Supplied with one tube of adhesive and one tube of hardener
- Syringe enables equal amounts of resin and hardener to be dispensed
- Syringe features re-usable cap
- Glue will not dry out in tubes



Item	Description	Type	Size	Price
821504	Epoxy Resin	Standard	2x 15ml	£6.49

All Purpose Contact Adhesive



Premium grade rubber based contact adhesive

- Suitable for internal and external use
- 1 minute instant bond



Item	Description	Size	Price
799921	All Purpose Contact Adhesive	30ml	£3.62

Impact Adhesive



Bonds most materials

- High strength
- Instant grab, 10 minute drying time



Item	Description	Size	Price
719210	Impact Adhesive	65g Tube	£6.49

Leak Detection Solution

This aqueous leak detection solution forms a stable foam when subjected to low pressure air from pressurised cables

- Solution should be applied with a clean brush ensuring that an even bubble free film is achieved
- Leave solution for 3 minutes before examining for evidence of foaming
- Remove all traces of the solution from the cable surfaces with clean water
- Also known as BT Solution Leak Detecting No.3



Item	Description	Volume	Price
300130	Leak Detection Solution	500ml	£1.79

Fixings, Fastenings & Labelling

- 244 D-Line Conduit & Cable Clips
- 245- 246 Fixings & Accessories
- 247 - 248 Tapes
- 249 - 250 Staple Guns & Staples
- 251 - 255 Cable Ties & Accessories
- 256 - 257 Cable Clips & Cleats
- 258 - 262 Brady Label Printers, Tapes and Accessories
- 263 Dymo Label Printers and Labels
- 264 Marker Pens



Fixings,
Fastenings &
Labelling

243

Fixings, Fastenings & Labelling

Fire-Rated Conduit Clips

Fire rated clips for round conduit systems

- Single piece design requires only 1 fixing
- Available in steel, white or black finish
- Available for 20mm and 25mm conduit
- Use with Safe-D fire rated screws (818257)



Item	Man. Code	Description	Material	Diameter	Colour	UoM	Price
818251	SAFE-DCOND20/20	Safe-D Conduit Clip	Steel	20mm	-	Pk of 20	£4.72
818252	SAFE-DCOND25/20	Safe-D Conduit Clip	Steel	25mm	-	Pk of 20	£6.44
818249	SAFE-DCOND20B/20	Safe-D Conduit Clip	Coated Steel	20mm	Black	Pk of 20	£8.95
818250	SAFE-DCOND25B/20	Safe-D Conduit Clip	Coated Steel	25mm	Black	Pk of 20	£9.66
818247	SAFE-DCOND20W/20	Safe-D Conduit Clip	Coated Steel	20mm	White	Pk of 20	£8.99
818248	SAFE-DCOND25W/20	Safe-D Conduit Clip	Coated Steel	25mm	White	Pk of 20	£9.98

CHECK OUT OUR **TRUNKING & CABLE MANAGEMENT** SECTION ONLINE



Safe-D Flame Retardant Trunking Cable Clips

Safe-D trunking cable clips are fire rated clips designed to retain surface cable installations even during fire conditions

- Available as flat (F-Clips) and pre-formed (U-Clips)
- Certified for 2 hours at 970°C
- Fully safety tested and certified to BS5839 part 1 compliant
- Thumb friendly, easy fold side-tabs
- Non-corrosive coating (coated versions)
- Ideal for ceiling voids, or popular PVC trunking
- Rounded edges for easy handling
- D30 - Base dimension 23mm (suitable for 30mm x 15mm Semi-Circle trunking)
- D40 - Base dimension 31mm (suitable for 50mm x 25mm Semi-Circle trunking)
- D50 - Base dimension 46mm (suitable for 50mm x 25mm Semi-Circle trunking)
- Also suitable for direct to surface installation
- We recommend Safe-D fire rated screws (818257) for use with these clips



Item	Man. Code	Description	Size	Material	UoM	Price
818254	SAFEDFLIP30/100	Safe-D F-Clip (Flat Form)	D30	Steel	Pk of 100	£10.73
818255	SAFEDFLIP40/50	Safe-D F-Clip (Flat Form)	D40	Steel	Pk of 50	£8.85
818256	SAFEDFLIP50/50	Safe-D F-Clip (Flat Form)	D50	Steel	Pk of 50	£11.21
801591	Safe-D30	Safe-D U-Clip	D30	Steel	Pk of 100	£15.75
801592	Safe-D40	Safe-D U-Clip	D40	Steel	Pk of 50	£12.95
801593	Safe-D50	Safe-D U-Clip	D50	Steel	Pk of 50	£14.96

Safe-D Conduit Spring Clips

A metal spring clip ideal for clamping cables within PVC micro trunking for an extra level of fire protection

- Suitable for use with mini, midi, quadrant or semi circular trunking
- Can be used independently
- Use with Safe-D fire rated screws (818257)



Item	Man. Code	Description	Material	UoM	Price
818253	SAFEDSPRING/50	Safe-D Conduit Spring Clip	Steel	Pk of 50	£8.49

Fixings, Fastenings & Labelling

Safe-D Fire Rated Screws



Fire rated screws for use with Safe-D cable clips

- Suitable for use with spring clips, conduit clips or standard trunking clips



Item	Man. Code	Description	UoM	Price
818257	DFIX/100	Safe-D Screws	Pk of 100	£8.49

Wall Dog Fire Rated Screws



An all steel, tension-free, one piece, threaded fastener. Use to fasten various fixtures directly to drywall, wood, concrete, sand-lime stone or brickwork

- No plug needed



Item	Description	UoM	Price
804431	Wall Dog Screws	Pk of 100	£7.72

Countersunk Wood Screws

Ultima countersunk twin thread wood screws

- Countersunk recessed head
- Suitable for wood, plastic and nylon wall plugs

Item	Size	Finish	Length	UoM	Price
820133	No.6	BZP	1/2" (12.7mm)	Pk of 200	£1.16
820134	No.6	BZP	3/4" (19.05mm)	Pk of 200	£1.52
820135	No.6	BZP	1" (25.4mm)	Pk of 200	£1.72
820136	No.6	BZP	1 1/2" (38.1mm)	Pk of 200	£2.48
820137	No.8	BZP	1/2" (12.7mm)	Pk of 200	£1.40
820138	No.8	BZP	3/4" (19.05mm)	Pk of 200	£1.84
820139	No.8	BZP	1" (25.4mm)	Pk of 200	£2.04
820140	No.8	BZP	1 1/4" (31.75mm)	Pk of 200	£2.52
820141	No.8	BZP	1 1/2" (38.1mm)	Pk of 200	£2.76
820143	No.8	BZP	2" (50.8mm)	Pk of 200	£3.82
820144	No.10	BZP	1" (25.4mm)	Pk of 200	£3.08
820145	No.10	BZP	1 1/2" (38.1mm)	Pk of 200	£4.22
820146	No.10	BZP	2" (50.8mm)	Pk of 200	£5.30
820148	No.10	BZP	2 1/2" (63.5mm)	Pk of 100	£3.76
820149	No.10	BZP	3" (76.2mm)	Pk of 100	£4.46
820150	No.12	BZP	1" (25.4mm)	Pk of 200	£4.46
820151	No.12	BZP	1 1/2" (38.1mm)	Pk of 200	£5.62



Roundhead Wood Screws

Combination roundhead wood screws

- Fully threaded with single thread

Item	Size	Finish	Length	UoM	Price
820152	No.6	BZP	1/2" (12.7mm)	Pk of 200	£0.96
820153	No.6	BZP	3/4" (19.05mm)	Pk of 200	£1.20
820154	No.6	BZP	1" (25.04mm)	Pk of 200	£1.38
820155	No.8	BZP	1" (25.04mm)	Pk of 200	£1.62
820156	No.8	BZP	1 1/2" (38.1mm)	Pk of 200	£1.96



Fixings, Fastenings & Labelling

Wall Plugs

Wall plug for use in any wall

- Expands at the top to give instant grip
- Packed loose for easy use



Item	Description	Drill Size	Colour	UoM	Price
778675	Wall Plug	5mm	Yellow	Box 100	£0.76
778676	Wall Plug	5.5-6mm	Red	Box 100	£0.79
778677	Wall Plug	7mm	Brown	Box 100	£1.05

Driva Wall Plugs

Metal one-piece, self-drilling anchor designed for fastening light/medium loads to plasterboard

- For use in plasterboard
- Simply screw in place using a screwdriver
- Length 32mm



Item	Description	Drill Size	UoM	Price
778678	Wall Plug Driva	8mm	Box 100	£8.33

Masonry Anchor - Loose Bolt



A high performance bolt suitable for heavy duty concrete

- Heavy duty anchor bolts for floor fixing



Item	Description	Size	Diameter	Length	Price
778663	Loose Bolt	M6	12mm	70mm	£0.69
778664	Loose Bolt	M8	14mm	75mm	£0.85
778665	Loose Bolt	M10	16mm	110mm	£1.17
804247	Loose Bolt	M12	20mm	115mm	£1.89

Masonry Anchor - Projecting Bolts



A high performance bolt suitable for heavy duty concrete, brickwork and stone

- Projecting bolt for wall fixings



Item	Description	Size	Diam	Length	Price
803569	Projecting Bolt	M6	12mm	75mm	£0.59
803570	Projecting Bolt	M8	14mm	100mm	£0.79
803571	Projecting Bolt	M10	16mm	120mm	£1.39

Spin In Resin Anchors

A measured resin hardener and aggregate sealed in a glass capsule. The capsule is placed in the fixing hole and the fastening stud is rotated into the capsule, mixing and initiating the curing process

- Faster installation than pumping resins
- Exact measure of resin required for each application
- Either end can be inserted into the hole
- Suitable for reduced anchor spacing and edge distances
- Ideal for installation in wet or damp conditions
- Vibration resistant



Item	Description	Size	Hole Depth	Diameter	Length	UoM	Price
782519	Spin In Resin Anchors	M8	80mm	10mm	80mm	Pk of 10	£11.50

Fixings, Fastenings & Labelling

PVC Tape

High quality, adhesive PVC insulation tape to BS3924

- Flame retardant
- Extremely flexible, good adhesion



Item	Description	Width	Colour	Length	Price
992073	PVC Tape	19mm	Black	20Mtr	£0.60
993966	PVC Tape	19mm	Blue	20Mtr	£0.60
993967	PVC Tape	19mm	Green	20Mtr	£0.60
783807	PVC Tape	19mm	Green/Yell	20Mtr	£0.60
994008	PVC Tape	19mm	Grey	20Mtr	£0.60
993965	PVC Tape	19mm	Red	20Mtr	£0.60

Item	Description	Width	Colour	Length	Price
993964	PVC Tape	19mm	White	20Mtr	£0.60
993968	PVC Tape	19mm	Yellow	20Mtr	£0.60
992067	PVC Tape	25mm	Black	20Mtr	£0.85
994260	PVC Tape	25mm	Red	20Mtr	£0.85
993140	PVC Tape	25mm	White	20Mtr	£0.85
990481	PVC Tape	25mm	Yellow	20Mtr	£0.85

Waterproof Tapes

High quality gaffer tape

- Flexible, abrasion resistant and easy to unwind



Item	Description	Width	Length	Colour	Price
783808	'Gaffa' Tape	50mm	50Mtr	Black	£4.40
783809	'Gaffa' Tape	50mm	50Mtr	Silver	£4.40

Aluminium Tapes

Aluminium foil tape

- Protects against effects of fire, dust and moisture
- Also helps to insulate pipes



Item	Description	Width	Length	Price
789146	Aluminium Tape	50mm	45Mtr	£3.55

Masking Tape

Tape for masking off areas not to be painted

- Can be used on glass, plasterboard and walls



Item	Description	Width	Price
791266	Masking Tape	50mm	£1.64

Double Sided Foam Tape

Double sided adhesive foam tape ideal for back boxes




Item	Description	Width	Length	Price
993969	Double Sided Tape	16mm	25Mtr	£7.96

Self Amalgamating Tape

Formable tape which bonds to itself to form a solid mass for a watertight seals

- Ideal for use with braided sleeving
- Can be used to seal leaks in water pipes and hoses
- Length 10Mtr

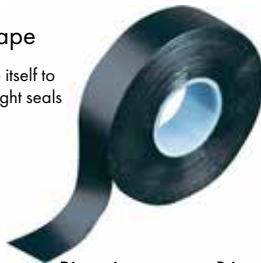

Item	Description	Dimensions	Price
799183	Self Amalgamating Tape	0.5mmx19mm	£3.24
992070	Self Amalgamating Tape	0.5mmx25mm	£4.16

Cabling Adhesive Tape

A cloth adhesive tape for securing cable grips to cable sheath

- Protects cable sheath from damage
- Strong adhesion qualities



Item	Description	Width	Length	Price
992062	Cabling Adhesive Tape	50mm	20Mtr	£6.26

Fixings, Fastenings & Labelling

Joint Sealing Tape

A 'Denso' type tape for joint wrapping

- Water and weather proof
- Strong adhesion properties
- Easy moulded around awkward shapes



Item	Description	Width	Colour	Length	Price
992063	Sealing Tape	50mm	Black	10Mtr	£5.73

Reinforcing Tape For Rubber Sheets

Reinforcing tape for use with self adhesive rubber sheets



Item	Description	Width	Length	Price
992072	Reinforcing Tape	50mm	10Mtr	£4.32

Poly Tape

Poly tape for tying cable wrappings and bundles

- Also known as BT Tape 11A



Item	Description	Width	Length	Price
801147	Poly Tape	5mm	500Mtr	£4.72

Hazard Tapes

- Vivid colours and easy to apply
- Abrasion, moisture and wear-resistant
- Adheres to a wide variety of substrates



Item	Description	Width	Length	Colour	Price
807686	Hazard Tape	50mm	33Mtr	B/Y	POA
807687	Hazard Tape	50mm	33Mtr	R/W	POA

Barrier Tape

Barrier safety tape that can be used to mark out hazards

- Non-adhesive



Item	Description	Width	Colour	Length	Price
801215	Barrier Tape	70mm	R/W	500Mtr	£4.91

FREE
NEXT DAY DELIVERY
ON ORDERS OVER £200

YOUR NUMBER ONE VENDOR NEUTRAL TRUNKING & CABLE MANAGEMENT DISTRIBUTOR

COMTEC ▶
AN ETC GROUP COMPANY



Armorduct COMMSCOPE D-LINE FLEXICON HellermannTyton KOLDLOK LANmark Schneider Electric Ultima UNISTRUT

Staple Guns



A high performance tool firing both CT-45 and CT-60 staples without any need for adjustment

- Ideal for installation of coaxial, satellite, Cat5 and Cat6 cables
- Lock down handle for easy storage
- Impact power adjuster
- Bottom loading magazine
- Slim high quality steel construction
- Full length cable guide



Item	Description	Type	Colour	Price
791217	Cable Tacker Staple Gun	Combination CT45/CT60	Silver	£21.37

CT45 Staples

CT-45 staples for cables up to 4.5mm diameter

- High quality staples
- Boxed in 5x 1000 packs
- Galvanised finish
- Ideal for securing telecoms and alarm cabling up to 4.5mm in diameter
- Use in Tacwise combi cable tracker 791217



Item	Description	Type	Height	Diameter	Colour	UoM	Price
801116	Galvanised Staples	CT45	8mm	up to 4.5mm	Silver	Pk of 5000	£6.81
801369	Galvanised Staples	CT45	10mm	up to 4.5mm	Silver	Pk of 5000	£7.47
801112	Galvanised Staples	CT45	8mm	up to 4.5mm	White	Pk of 5000	£7.50
801114	Galvanised Staples	CT45	10mm	up to 4.5mm	White	Pk of 5000	£8.04

CT60 Staples

CT-60 staples for cables up to 6mm diameter

- High quality staples
- Boxed in 5x 1000 packs
- Galvanised finish
- For the installation of coaxial, satellite, Cat5e and Cat6 cables and other low voltage cabling applications
- Use in Tacwise combi cable tracker 791217




Item	Description	Type	Height	Diameter	Colour	UoM	Price
993861	Galvanised Staples	CT60	10mm	up to 6mm	Silver	Pk of 5000	£7.64
801370	Galvanised Staples	CT60	14mm	up to 6mm	Silver	Pk of 5000	£9.72
801371	Galvanised Staples	CT60	10mm	up to 6mm	White	Pk of 5000	£8.40
801373	Galvanised Staples	CT60	14mm	up to 6mm	White	Pk of 5000	£10.32

Fixings, Fastenings & Labelling

R28 Heavy Duty Cable Tacker

The Rapid R28 stapler is ideal for securing low voltage cables (below 50V) up to 4.5mm diameter. It has no recoil and an adjustable driving force to suit hard or softer materials or to assist driving of longer staples

- Fast bottom loading
- Uses cable staples No. 28 (8mm to 10mm)
- Suitable for cables up to 4.5mm diameter

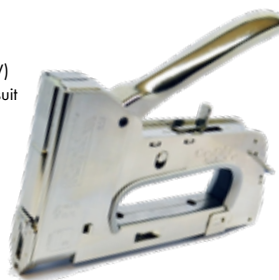

Item	Description	Type	Colour	Price
440151	Cable Tacker Staple Gun	R28	Silver	£42.11

R28 Staples

No.28 staples suitable for the Rapid R28 staple gun

- For use on cable up to 4.5mm wide
- Suitable for Rapid R28 cable tacker
- Galvanised steel



Item	Description	Type	Height	Diameter	Colour	UoM	Price
993860	Galvanised Staples	R28	10mm	up to 4.5mm	Silver	Pk of 5000	£10.16
797351	Galvanised Staples	R28	8mm	up to 4.5mm	White	Pk of 5000	£15.16
797352	Galvanised Staples	R28	10mm	up to 4.5mm	White	Pk of 5000	£10.94

R36 Heavy Duty Cable Tacker

The Rapid R36 stapler is ideal for securing low voltage cables (below 50V) up to 6mm diameter. It has no recoil and an adjustable driving force to suit hard or softer materials or to assist driving of longer staples

- Fast bottom loading
- Uses cable staples No. 36 (10mm to 14mm)
- Suitable for cables up to 6mm diameter



Item	Description	Type	Colour	Price
993858	Cable Tacker Staple Gun	R36	Silver	£40.34

R36 Staples

No.36 Staples for the Rapid R36 staple gun

- For use on cable up to 6mm wide
- Suitable for Rapid R36 cable tacker
- Galvanised steel



Item	Description	Type	Height	Diameter	Colour	UoM	Price
797354	Galvanised Staples	R36	12mm	up to 6mm	Silver	Pk of 5000	£10.42
993863	Galvanised Staples	R36	14mm	up to 6mm	Silver	Pk of 5000	£11.12
808365	Galvanised Staples	R36	14mm	up to 6mm	White	Pk of 5000	£12.65

Standard Cable Ties

One-piece moulded non-releasable cable ties

- Made with nylon 6.6
- Bent finger grip and low threading force for quick installation
- Smooth rounded edges
- Flame resistant in accordance with UL94V2



Item	Description	Bundle Size	Width	Length	Colour	UoM	Price
993895	Nylon Cable Tie	25mm	2.5mm	100mm	Black	Pk of 100	£0.45
795556	Nylon Cable Tie	44mm	2.5mm	200mm	Black	Pk of 100	£1.28
793683	Nylon Cable Tie	76mm	3.6mm	300mm	Black	Pk of 100	£2.83
806048	Nylon Cable Tie	25mm	4.8mm	120mm	Black	Pk of 100	£1.46
993897	Nylon Cable Tie	38mm	4.8mm	160mm	Black	Pk of 100	£2.24
993899	Nylon Cable Tie	44mm	4.8mm	200mm	Black	Pk of 100	£1.99
993901	Nylon Cable Tie	80mm	4.8mm	300mm	Black	Pk of 100	£2.95
790501	Nylon Cable Tie	102mm	4.8mm	370mm	Black	Pk of 100	£4.63
783718	Nylon Cable Tie	103mm	7.6mm	370mm	Black	Pk of 100	£6.27
783724	Nylon Cable Tie	140mm	9.0mm	530mm	Black	Pk of 100	£15.66
993894	Nylon Cable Tie	25mm	2.5mm	100mm	Natural	Pk of 100	£0.45
795555	Nylon Cable Tie	44mm	2.5mm	200mm	Natural	Pk of 100	£1.28
793682	Nylon Cable Tie	76mm	3.6mm	300mm	Natural	Pk of 100	£2.83
806047	Nylon Cable Tie	25mm	4.8mm	120mm	Natural	Pk of 100	£1.46
993896	Nylon Cable Tie	38mm	4.8mm	160mm	Natural	Pk of 100	£2.24
993898	Nylon Cable Tie	44mm	4.8mm	200mm	Natural	Pk of 100	£1.99
993900	Nylon Cable Tie	76mm	4.8mm	300mm	Natural	Pk of 100	£2.95
795300	Nylon Cable Tie	103mm	4.8mm	370mm	Natural	Pk of 100	£4.63
783717	Nylon Cable Tie	103mm	7.6mm	370mm	Natural	Pk of 100	£6.27
783722	Nylon Cable Tie	140mm	9.0mm	530mm	Natural	Pk of 100	£15.66

LSZH Cable Ties

HellermannTyton.

HellermannTyton's flame retardant ties are manufactured in a special low toxicity material to meet the requirements of UL94 VO

- Low smoke zero halogen (LSZH) flame retardant cable ties



Item	Description	Type	Other	Bundle Size	Width	Length	Colour	UoM	Price
788742	Cable Ties	LSZH	Fire Retardant	22mm	2.5mm	100mm	Natural	Pk of 100	£4.80
788745	Cable Ties	LSZH	Fire Retardant	35mm	3.5mm	150mm	Natural	Pk of 100	£15.78
788746	Cable Ties	LSZH	Fire Retardant	50mm	4.6mm	200mm	Natural	Pk of 100	£25.70
788747	Cable Ties	LSZH	Fire Retardant	110mm	4.6mm	390mm	Natural	Pk of 100	£37.27

Fixings, Fastenings & Labelling

Metal Content Cable Tie

HellermannTyton

The metal content cable tie is designed for use in the food and pharmaceutical processing industries. A unique manufacturing process, involving the inclusion of a metallic pigment, enables even small 'cut-off' sections of the tie to be detected by standard metal-detecting equipment

- Total metal dispersion throughout the tie
- Can support quality assurance in the production of food stuffs, for example HACCP
- Blue colour for easy visual detection
- Greatly reduces risk of contamination
- Magnetic and X-ray detectable (detection level depending on specific application and equipment)



Item	Description	Bundle Size	Width	Length	UoM	Price
811018	Cable Ties	50mm	4.6mm	202mm	Pk of 100	£16.63
811021	Cable Ties	110mm	4.7mm	380mm	Pk of 100	£31.73
811022	Cable Ties	535mm	7.6mm	387mm	Pk of 100	£51.20

Stainless Steel Cable Tie

Stainless steel cable ties to support cables in escape routes and prevent overhead cables, including those in PVC conduit, from premature collapse in the event of a fire

- Self locking design for fast and secure installation
- Smooth internal surface, suitable for all types of cable insulation
- Roller ball type 316 grade stainless steel cable ties
- Det Norske Veritas type approval number E-6729
- Operating temperature: -60°C to 300°C



Item	Description	Bundle Size	Width	Colour	Length	UoM	Price
798940	Stainless Steel Cable Tie	46mm	4.6mm	Silver	150mm	Pk of 100	£9.02
798941	Stainless Steel Cable Tie	62mm	4.6mm	Silver	200mm	Pk of 100	£10.50
798942	Stainless Steel Cable Tie	75mm	4.6mm	Silver	260mm	Pk of 100	£11.97
798943	Stainless Steel Cable Tie	85mm	4.6mm	Silver	300mm	Pk of 100	£12.81
798944	Stainless Steel Cable Tie	113mm	4.6mm	Silver	360mm	Pk of 100	£13.65

Stainless Steel Screw Fixed Cable Tie Cradles

Stainless steel screw fixed cable tie cradles for use with stainless steel cable ties

- For indoor and outdoor use, fully weather and UV resistant
- Ideal for hazardous environments
- Fire and corrosion resistant
- Where security and durability are critical
- Can be used for fixing pipework, conduits and bundles of cables



Item	Description	Type	Cable Tie Size	Height	Width	Length	UoM	Price
810524	Cable Tie Base	Stainless Steel M4	10mm	4.2mm	15mm	29.2mm	Pk of 50	£11.60
810526	Cable Tie Base	Stainless Steel M6	10mm	6.2mm	15mm	29.2mm	Pk of 50	£11.60

Fixings, Fastenings & Labelling

Marker/Label Ties

A quick and effective method of securing and marking bundles of cables

- Large flat area for attachment of printed labels



Item	Description	Type	Marking Area	Bundle Size	Width	Length	UoM	Price
786241	Nylon Cable Tie	Identification Marker	25x8mm	18mm	2.5mm	100mm	Pk of 100	£2.78

Cable Ties

Cable ties made using a soft and flexible material that can stretch by up to 60%. The specially shaped cells are designed to deform and flex to permit them to pass through one another

- A radical departure from the traditional nylon tie, which forms a single rigid loop
- Offers a softer binding that can be pulled to any required tension
- Can be easily removed and re-used
- Self-terminating design - when a tied portion is cut off, the remaining section is still fully functional creating multiple ties from each strap



Item	Description	Width	Length	Colour	UoM	Price
779819	Reusable Cable Tie	10mm	300mm	Black	Bag of 48	£5.82

SAF Self-Adhesive Cable Clips

Self-adhesive clips with a deformable tongue which can easily be shaped around the cable to give a secure fixing

- Clips are made from mild steel with a self-adhesive backing



Item	Description	Type	Mfr Ref	Size	Width	Length	Colour	UoM	Price
993927	SAF Standard Clip	Self Adhesive	SAF2	8mm	25mm	37mm	White	Pk of 50	£6.83
993928	SAF Standard Clip	Self Adhesive	SAF3	12mm	32mm	44mm	White	Pk of 100	£11.67
993929	SAF Standard Clip	Self Adhesive	SAF4	16mm	38mm	53mm	White	Pk of 100	£13.78

Push-In Cable Tie Mount

To fix cables to walls without using screws or plugs

- Simply drill hole (6mm or 8mm) and knock in
- Accepts cable ties up to 9mm wide



Item	Description	Dia	Length	UoM	Price
779857	Cable Tie Base	6mm	30mm	Pk 100	£4.62
779724	Cable Tie Base	8mm	44mm	Pk 100	£4.86

Heavy Duty Cable Tie Base

Suitable for use with 4.8mm cable ties

- Supplied with self-adhesive pad
- Can be screw fixed



Item	Description	Width	Length	UoM	Price
994701	Cable Tie Base	25mm	25mm	Pk of 100	£6.56

Fixings, Fastenings & Labelling

Screw Fixed Cable Tie Cradles

Centre and side fixed cable tie bases

- Made from nylon 6.6
- Black mounts are resistant to UV radiation



Centre Fixed

Side Fixed

Item	Description	Type	Cable Tie Size	Width	Length	Colour	UoM	Price
779823	Cable Tie Base	Screw Type (Centre Fixed)	4.8mm	10mm	15mm	Black	Pk of 100	£3.88
779824	Cable Tie Base	Screw Type (Centre Fixed)	4.8mm	10mm	15mm	Natural	Pk of 100	£3.88
779825	Cable Tie Base	Screw Type (Centre Fixed)	10mm	15mm	22mm	Black	Pk of 100	£5.67
779826	Cable Tie Base	Screw Type (Centre Fixed)	10mm	15mm	22mm	Natural	Pk of 100	£5.67
779821	Cable Tie Base	Screw Type (Side Fixed)	4.8mm	10mm	20mm	Black	Pk of 100	£2.69
779822	Cable Tie Base	Screw Type (Side Fixed)	4.8mm	10mm	20mm	Natural	Pk of 100	£2.69

Self-Adhesive Tie Bases

Mounts are assembled on a backing strip for easy removal

- A coating of synthetic rubber on both sides of the foam base creates high levels of instant tack and shear adhesion
- Material Nylon 6.6
- The black mounts are ideal where exposed to sunlight or aggressive external conditions



Item	Description	Type	Cable Tie Size	Width	Length	Colour	UoM	Price
779829	Cable Tie Base	Self Adhesive	3mm	20mm	20mm	Black	Pk of 100	£3.13
779830	Cable Tie Base	Self Adhesive	3mm	20mm	20mm	Natural	Pk of 100	£3.13
779833	Cable Tie Base	Self Adhesive	4.8mm	28mm	28mm	Black	Pk of 100	£5.37
779834	Cable Tie Base	Self Adhesive	4.8mm	28mm	28mm	Natural	Pk of 100	£5.37

Cable Tie Tool

HellermannTyton.

Lightweight tool for tensioning and cutting standard cable ties

- Ideal for onsite assembly
- Mount and pre-tension the ties by hand and then cut off by twisting at the head
- The cable tie is then cut off flush at the head



Item	Man. Code	Description	Mfr Ref	Price
811112	MARK 21	Cable Tie Tool	MK21	£29.52

Stainless Steel Cable Tie Tensioners & Cutters

Stainless steel cable tie tensioner and cutting tool

- Quicker fastening and automatic cutting of cable ties
- Trigger mechanism to reduce operator fatigue



Item	Description	Price
823070	Stainless Steel Cable Tie Tensioner & Cutter	£46.06

Partex Stainless Steel Cable Tie Tensioning & Cutting Tool

Heavy duty, two stage manual tensioning tool for stainless steel cable ties

- For high volume applications
- High strength construction for long life
- Flush cutting
- Easy to use providing strong, secure fixing of steel ties
- For use with all roller ball ties



Item	Description	Price
802528	Tensioning & Cutting Tool for Steel Cable Ties	£79.00

Hook & Loop Self-Gripping Cable Straps

A polyamide looped jersey laminated onto polyester/polypropylene mushroom also known as hook and loop

- Re-usable
- Prevents pinching, does not distort or damage fragile cables
- Easy and quick to use



Item	Description	Width	Length	Price
778715	Hook & Loop Cable Strap	9mm	25Mtr	£10.45
778717	Hook & Loop Cable Strap	16mm	25Mtr	£15.70
807558	Hook & Loop Cable Strap	20mm	25Mtr	£19.16
779705	Hook & Loop Cable Strap	25mm	25Mtr	£23.93

Hook & Loop Self-Gripping Cable Ties

A range of nylon/polyester hook and loop style cable ties for securing all types of cables

- Re-usable
- Cable friendly, does not distort or damage fragile cables
- Does not pinch cables
- Easy and quick to use
- Can be fixed to a bracket with a screw or rivet for permanent application:



Item	Description	Width	Length	UoM	Price
774428	Hook & Loop Cable Tie	13mm	150mm	Pk of 100	£12.50
774429	Hook & Loop Cable Tie	13mm	200mm	Pk of 100	£19.95
774435	Hook & Loop Cable Tie	13mm	300mm	Pk of 100	£23.95

Fixings, Fastenings & Labelling

Round Cable Clips

Standard round style cable clip with captive hardened steel pin

- Available in a range of sizes and colours



Item	Size	Colour	UoM	Price
993096	2.75mm	White	Box of 100	£2.63
993902	3.5mm	White	Box of 100	£1.51
992148	4.5mm	White	Box of 100	£1.51
992351	5mm	White	Box of 100	£1.78
992554	6mm	White	Box of 100	£2.07
993106	7mm	White	Box of 100	£2.07
993108	8mm	White	Box of 100	£3.36
993109	9mm	White	Box of 100	£3.09
993905	10mm	White	Box of 100	£5.19
993907	11mm	White	Box of 100	£4.48
993115	12mm	White	Box of 100	£7.45
993910	14mm	White	Box of 100	£6.23
993912	16mm	White	Box of 100	£7.28
992150	3.5mm	Black	Box of 100	£1.51
993903	4.5mm	Black	Box of 100	£1.42
993104	5mm	Black	Box of 100	£1.82
992151	6mm	Black	Box of 100	£1.97
993904	7mm	Black	Box of 100	£1.80
993107	8mm	Black	Box of 100	£3.36
993110	9mm	Black	Box of 100	£3.00
993906	10mm	Black	Box of 100	£5.19
993908	11mm	Black	Box of 100	£3.75
993909	12mm	Black	Box of 100	£7.45
993911	14mm	Black	Box of 100	£5.50
993913	16mm	Black	Box of 100	£6.23
791783	7mm	Brown	Box of 100	£2.46

Siamese Cable Clips

Round cable clip with captive hardened steel pin for Siamese (twin) cable

- Can be used to fix twin coax cable into timber, mortar and block work
- Size: 13mm x 6mm



Item	Description	Cable	Colour	UoM	Price
799184	Cable Clip	RG6	Black	Pk of 100	£3.10
799185	Cable Clip	RG6	White	Pk of 100	£3.52

Twin & Earth Cable Clip

Cable clip to secure twin and earth cable

- Can be used to fix twin and earth cable into timber, mortar and block work



Item	Description	Type	Size	UoM	Price
809840	Cable Clip	Flat	6mm	Pk of 100	£3.07

YOUR NUMBER ONE VENDOR NEUTRAL
STRUCTURED CABLING DISTRIBUTOR

COMTEC
AN ETC GROUP COMPANY



COMMSCOPE

COMMSCOPE
NETCONNECT

Draka

HellermannTyton

LANmark

SIEMON

Coated Steel Cable Clips

HellermannTyton.

A quick and simple way of securing cables to meet the requirements of BS7671, which imposes the use of metal fixings to secure wiring systems within the escape routes of buildings. These fire resistant clips improve safety by ensuring cabling will not collapse in the event of a fire

- Available in single or twin styles
- 4.5mm Clips recommended for CT65 cable
- 7mm Clips recommended for RG6/CT100
- Flex design grips the cables and clamps into position, even in the event of a fire
- Quick and easy to apply, simply push the clip over the cables and hammer into position
- Integrated hardened steel nail pre-fitted to clips to ensure a secure fixing to the building fabric (nail dimensions 25mm x 2.5mm)
- Meets the requirements of BS7671, 3rd Amendment 17th Edition
- Manufactured from stainless steel 430 material with a PA11 coating



Item	Description	Style	Cable Dia	Colour	UoM	Price
803779	Coated Steel Cable Clip	Round Single	4.5mm	Black	Pk of 50	£2.09
803780	Coated Steel Cable Clip	Round Single	4.5mm	White	Pk of 50	£5.00
803776	Coated Steel Cable Clip	Round Single	7mm	Black	Pk of 50	£5.56
803778	Coated Steel Cable Clip	Round Single	7mm	White	Pk of 50	£5.56
803781	Coated Steel Cable Clip	Round Twin	4.5mm	Black	Pk of 50	£5.34
803782	Coated Steel Cable Clip	Round Twin	4.5mm	White	Pk of 50	£5.34

Warning & Hazard Labels

Custom hazard and warning labels

- For alternative designs and sizes please contact our sales team



Item	Description	Type	Height	Width	UoM	Price
816217	Warning Labels	Danger 230 Volts	50mm	50mm	Pk of 5	£13.24
816221	Warning Labels	Laser Radiation	53mm	56mm	Pk of 5	£2.50



COMTEC 
AN ETC GROUP COMPANY

Look out for regular offers on our social media channels

Fixings,
Fastenings &
Labelling

Fixings, Fastenings & Labelling

BMP21-PLUS



The BMP21-PLUS portable label printer is an all-in-one labeller for voice/datacom, electrical and general industrial teams. With label materials designed specifically for harsh environments, the BMP21-Plus printer can quickly and easily create clear labels that stay stuck for years - despite extreme temperatures and curved or highly textured surfaces

- Creates multi-line labels for clear identification of wires, panels, circuit boards and other industrial items
- Keyboard contains letters A to Z and numbers 0 to 9
- Backlit LCD graphics display for easier labeling even in low-lit areas
- Prints in 6 different text sizes ranging from 6 point to 40 point in a single color
- Compatible with Brady BMP21 series printer tape cartridges
- Drop-tested and reinforced with molded-rubber impact bumpers for durability in the most demanding work environments
- Newest firmware update includes: Arial font, 2D barcode printing capabilities, home electrical panel wizard and more
- Blister Pack version (printer only) requires 6x AA batteries (sold separately)
- 2 year warranty



Item	Description	Mfr Ref	Price
806649	Label Printer	BMP21-Plus UK Kit	£150.00

BMP21-PLUS Polyester Labels



A high adhesion, general purpose label suitable for use indoors and outdoors. Abrasion, fuel & oil, heat and low temperature resistant

- Suitable for barcodes, PCBs, asset tracking and datacoms
- High performance polyester material
- For use on smooth, flat surfaces



Item	Description	Mfr Ref	For Printer	Length	Width	Colour	Price
831322	Polyester Label	M21-250-423	BMP21-PLUS	6.4Mtr	6.3mm	Black on White	£19.37
831323	Polyester Label	M21-375-423	BMP21-PLUS	6.4Mtr	9.5mm	Black on White	£20.84
801148	Polyester Label	M21-500-423	BMP21-PLUS	6.4Mtr	12.7mm	Black on White	£23.47
831324	Polyester Label	M21-750-423	BMP21-PLUS	6.4Mtr	19mm	Black on White	£27.37

Fixings, Fastenings & Labelling

BMP21 -PLUS All-Weather Vinyl Labels

These high adhesion vinyl labels will adhere to difficult low surface energy items and highly textured surfaces

- Abrasion, fuel & oil resistant
- Cold temperature resistant
- Outdoor durable



Item	Description	Mfr Ref	For Printer	Length	Width	Colour	Price
831331	All-Weather Vinyl Label	M21-375-595-WT	BMP21-PLUS	6.4Mtr	9.5mm	Black on White	£20.52
831335	All-Weather Vinyl Label	M21-500-595-WT	BMP21-PLUS	6.4Mtr	12.7mm	Black on White	£23.08
806655	All-Weather Vinyl Label	M21-750-595-WT	BMP21-PLUS	6.4Mtr	19.1mm	Black on White	£26.92

BMP21 -PLUS BradyGrip Print-on Hook Material

A print-and-place VELCRO hook material that can be easily applied, repositioned or removed from hook

- Use with 20 - 50 mm size range of VELCRO ONE-WRAP ties
- Easy to reposition, remove and reuse



Item	Description	Mfr Ref	For Printer	Length	Width	Colour	Price
831346	BradyGrip Print-on Hook Material	M21-250-414	BMP21-PLUS	3Mtr	6.35mm	Black on White	£23.52
831347	BradyGrip Print-on Hook Material	M21-500-414	BMP21-PLUS	3Mtr	9.5mm	Black on White	£27.79
831348	BradyGrip Print-on Hook Material	M21-750-414	BMP21-PLUS	3Mtr	19mm	Black on White	£32.07

BMP21 -PLUS Nylon Cloth Labels

High adhesion, flexible nylon cloth labels with a wide range of applications. Common applications include terminal block labelling, wire/cable marking, laboratory and general ID

- Abrasion and oil resistant
- Protective layer over text
- Can be used in flag mode for cable ID




Item	Description	Mfr Ref	For Printer	Length	Width	Colour	Price
831321	Nylon Cloth Label	M21-375-499	BMP21-PLUS	4.88Mtr	9.5mm	Black on White	£21.56
822550	Nylon Cloth Label	M21-500-499	BMP21-PLUS	4.88Mtr	12.7mm	Black on White	£26.19
820741	Nylon Cloth Label	M21-750-499	BMP21-PLUS	4.88Mtr	19mm	Black on White	£29.17

BMP21 -PLUS Self-Laminating Cable Wrap Labels

Self-lamination labels for identifying cables and wires. Clear, wrap-around tail overlaminates printed area

- Easily identify cables
- Durable and secure
- Easy to apply



Item	Description	Mfr Ref	For Printer	Length	Width	Colour	Cable ø	Price
831326	Self-laminating Cable Label	M21-1000-427	BMP21-PLUS	4.3Mtr	25.4mm	White	2.7-5.1 mm	£44.13
791402	Self-laminating Cable Label	M21-1250-427	BMP21-PLUS	4.3Mtr	31.75mm	White	3.2-5.7mm	£44.95
803831	Self-laminating Cable Label	M21-1500-427	BMP21-PLUS	4.3Mtr	38.1mm	White	4-8.1mm	£45.49

Fixings,
Fastenings &
Labelling

Fixings, Fastenings & Labelling

BMP51 Teledatcom Kit



The BMP51 kit contains everything you need to get started with your voice/data labelling

- BMP51 Printer with hard case, USB cable, rechargeable Li-Ion battery and AC adaptor with power cord
- Magnet accessory
- Brady LabelMarkT 5 labelling software
- Self-laminating cable markers (M-18-427)
- Port, faceplate and general ID labels (MC-375-422)
- General ID label (MC-1500-595-WT-BK)



Item	Description	Type	Price
797999	Label Printer	BMP51 Teledatcom Kit	£715.00

BMP51 Self-Laminating Labels



Label cartridges for the Brady BMP series label printers

- Ribbon and label materials all in ONE cartridge
- Easy-to-load cartridges with no jam technology



Item	Description	Mfr Ref	For Printer	Labels Per Roll	Height	Width	Colour	Price
809367	Self Laminating Labels	M-51-427	BMP51/53	110	63.50mm	25.40mm	White	£36.38
801217	Self Laminating Labels	M-91-427	BMP41/51/53	180	38.1mm	25.4mm	White	£37.19

BMP61 Label Printer

Handheld label printer with QWERTY keyboard and touch screen

- Max. label dimensions: 6.4x50.8mm
- Prints continuous, die cut labels and bulk rolls
- Comes with Brady WorkStation Basic Design Software Suite



BRADY
WHEN PERFORMANCE MATTERS MOST™

+ BASIC SOFTWARE

Item	Description	Model	Variant	Price
834686	Label Printer	BMP61	QWERTY UK WiFi	£585.00
823592	Label Printer	BMP61	QWERTY UK	£546.00

BMP61 Ribbon Cartridge

Labels and ribbons for use with the Brady BMP61 series label printers

- Label reels and ribbons fit quickly and easily inside the printer
- Boxes of labels use for high volume, bench-top printing



BRADY
WHEN PERFORMANCE MATTERS MOST™



Item	Description	Mfr Ref	For Printer	Length	Width	Colour	Price
832133	Ribbon Cartridge	M61-R6010	BMP61/M611	22.9mm	50mm	Black	£24.36

BMP61 Flag Labels

Labels and ribbons for use with the Brady BMP61 series label printers

- Label reels and ribbons fit quickly and easily inside the printer
- Boxes of labels use for high volume, bench-top printing



BRADY
WHEN PERFORMANCE MATTERS MOST™



Item	Description	Mfr Ref	For Printer	Height	Width	Colour	Price
776930	Polypropylene Flag Labels	PTLFT-01-425	BMP61/BMP71/M611	20mm	30mm	White	£40.32

Fixings, Fastenings & Labelling

BMP61 Self Laminating Labels

Labels and ribbons for use with the Brady BMP61 series label printers

- Label reels and ribbons fit quickly and easily inside the printer
- Boxes of labels use for high volume, bench-top printing



Item	Description	Mfr Ref	For Printer	Labels Per Roll	Height	Width	Colour	Price
790633	Self Laminating Labels	PTL-21-427	BMP61/M611	100	19.5mm	25.4mm	White	£31.94
782531	Self Laminating Labels	PTL-31-427	BMP61/M611	250	12.7 mm	25.4mm	White	£42.98

BMP61 Tie-on Cable Labels

Labels and ribbons for use with the Brady BMP61 series label printers

- Label reels and ribbons fit quickly and easily inside the printer
- Boxes of labels use for high volume, bench-top printing
- 250 Labels/Box



Item	Description	Mfr Ref	For Printer	Material	Height	Width	Colour	Price
832322	Tie-on Cable Label	BM71-15x75-7598-YL	BMP61/BMP71/M611	PES	15mm	75mm	Yellow	£152.32
832321	Tie-on Cable Label	BM71-15x75-7643-YL	BMP61/BMP71/M611	TPU	15mm	75mm	Yellow	£114.96
832134	Tie-on Cable Label	BM71-25x75-7643-YL	BMP61/BMP71/M611	TPU	25mm	75mm	Yellow	£143.69

BMP61 PIANO I Label

Print professional quality, long lasting PIANO I labels using the Brady BMP61 portable label printer

- Label content can be configured to specific used requirements
- Create long lasting, legible labels
- Supplied in a pre-perforated strip, 250 Labels/Box
- Use with the R4310 ribbons (829693)



YouTube VIDEO ONLINE

Item	Description	Mfr Ref	For Printer	Length	Width	Colour	Price
834688	PIANO I Label	BMP61-B7597-35X102-YL-BLNK	BMP61	102mm	35mm	Yellow	£99.91

BMP61 Vinyl General ID Labels

Labels and ribbons for use with the Brady BMP61 series label printers

- Label reels and ribbons fit quickly and easily inside the printer
- Boxes of labels use for high volume, bench-top printing



Item	Description	Mfr Ref	For Printer	Length	Width	Colour	Price
790127	Vinyl General ID Label	PTL-8-439	BMP61/M611	15.24mm	12.7mm	White	£38.24

Label Manager 160P

Portable and affordable label maker

- Type text easily on the computer-style keyboard
- Format fast with one-touch Smart Keys for text size, bold, italic, underline/box and vertical text
- Preview your label in the large LCD display
- Choose from 6 font sizes, 8 text styles, 4 boxes plus underline
- Add impact and clarity with 228 symbols and clip art images
- Powered by 6 AAA alkaline batteries (not included - see pg134) or optional AC adaptor



Item	Man. Code	Description	Type	Labels	Price
787509	S0946320	Label Manager 160P	Printer	D1 12mm	£33.65

Label Manager 280

LabelManager 280, powered by a lithium-ion battery that helps you avoid the cost and waste of disposable batteries

- Large 30mm x 60mm screen displays two lines of label text
- Graphical display lets you see text effects on screen before you print
- Improved user interface that displays all menu options onscreen without scroll
- Choose from 3 font styles, 6 font sizes, one of the many styles and one of 8 different box styles or underline
- 9 Label memory and save text feature
- Print up to 10 copies of the same label



Item	Man. Code	Description	Type	Labels	Price
787510	S0968960	LabelManager 280	Printer	D1 12mm	£64.31

Label Manager Labels

D1 standard or flexible durable labels

- Compatible with LabelManager
- Standard labels for hundreds of tasks around the office, available in continuous label cassettes
- Flexible labels are for curved and/or heavily textured surfaces and flag-marking cables. Its permanent adhesive means it will stay put



Item	Man. Code	Description	Material	Colour	Width	Length	Price
783335	S0720780	D1 Label Tape	Standard	Black on White	6mm	7Mtr	£19.49
787505	S0720680	D1 Label Tape	Standard	Black on White	9mm	7Mtr	£20.50
787508	S0720530	D1 Label Tape	Standard	Black on White	12mm	7Mtr	£21.99
783337	S0720830	D1 Label Tape	Standard	Black on White	19mm	7Mtr	£27.21
787506	S0720670	D1 Label Tape	Standard	Black on Clear	9mm	7Mtr	£20.50
787507	S0720500	D1 Label Tape	Standard	Black on Clear	12mm	7Mtr	£21.99
783336	S0720790	D1 Label Tape	Standard	Black on Yellow	6mm	7Mtr	£19.49
792042	S0720730	D1 Label Tape	Standard	Black on Yellow	9mm	7Mtr	£20.50
791972	S0718040	D1 Label Tape	Flexible Nylon	Black on White	12mm	3.5Mtr	£21.78

Fixings, Fastenings & Labelling

Marker Pen

Twin tip permanent marker pens designed to write practically anywhere

- Increased functionality with both fine and ultra fine tips in one marker
- Permanent on most surfaces
- Fade and water resistant
- Quick drying ink
- AP certified nontoxic formula



Item	Description	Type	Colour	Price
794634	Permanent Marker Pen	Twin Tip	Black	£1.55

Fine Tip Marker Pen

STÄDTLER

Fine tipped marker pens from Staedtler

- Lumocolor permanent marker



Item	Description	Line Weight	Colour	Price
994344	Permanent Marker Pen	0.6mm	Black	£1.21

Fine Tip Marker Pen

Fine tipped marker pens from Artline for writing on all types of surfaces

- Rich pigment ink
- Fast drying and long lasting
- Water and fade resistant



Artline
Make an impression.

Item	Description	Line Weight	Colour	Price
994345	Permanent Marker Pen	1.2mm	Gold	£2.98

Acrylic Paint Marker Pens

Ambersil

Ambersil marker pens can be used exactly like permanent ink markers

- Fast drying and long lasting
- Writes on almost any surface



Item	Description	Colour	Price
786351	Acrylic Paint Marker Pen	Black	£4.08
786345	Acrylic Paint Marker Pen	White	£4.08



Visit www.comtecdirect.co.uk for
SPECIAL OFFERS

Index

265

Index

A

Access Ramps	124
Adhesives	242
Adjustable Wrenches	93
Aerial Drop Cable	12
Air Duster	38
Air/Blowing Equipment	15
Aluminium Strips	223
Anchor & Pole Brackets	218
Anchoring Clamp	217
Angle Grinder	110
Anti-Static Wrist Strap	60

B

Ball Pein Hammers	78
Bare Fibre Adaptor	54
Barrier Creams	157
Batteries & Charging	109, 134
Batteries, Alkaline	134
Battery Pack, Lithium Polymer	134
Batteries, Zinc Carbon	134
Beacons	159
Beanie Hat	171
Bedding Mortar	142
Bellmouths	203 - 204
Bitumin Seal	142
BiX Cutter	116
Blowing Equipment Accessories	16 - 18
Blowing Machines	15 - 16
Blowing Tips	17
Blown Fibre	13
Blown Fibre Sponges	18
Blown Fibre Tube Cutters	20
Boilersuit	174
Bolt & Basket Cutters	85
Bow Saw	138
Bradawl	79
Brick Bolsters	79
Brooms	145
Brushes , Hand	145
Brushes , Wire	146

Bucket, Galvanised Steel	144
Bucket, Plastic	144
Bucket, Rubber	144
Buffer & Jacket Strippers	20, 21, 24

C

Cable Anchoring	219
Cable Bearer Brackets	188
Cable Bearer Locking Pins	189
Cable Bearers	188
Cable Clips	256 - 257
Cable Cutters	84
Cable Dispensers	205
Cable Drum Jacks/Spindles	209
Cable Drum Rollers	208
Cable Drum Rollers	209
Cable Entry Solutions & Covers	238
Cable Extension Reels, Industrial	133
Cable Fault Finders	58
Cable Grips	182
Cable Guides	203
Cable Height Meters	220
Cable Lubricant	38
Cable Pulling System	206
Cable Raising Supports	220
Cable Reel Stand	208
Cable Rods	183
Cable Rods	207
Cable Shears	85
Cable Sheath Strippers	20
Cable Slitter & Ring Tool	23
Cable Slitter Tools	25
Cable Strip & Ring Tool	23
Cable Support Bars	187
Cable Testers	58
Cable Tie Bases	252
Cable Tie Bases	253
Cable Tie Bases	254
Cable Tie Identification Markers	253
Cable Tie Tools	254
Cable Ties	251 - 252

Cable, Blown Fibre	13	Connector Cleaning Tools	35 -36
Cable, Fibre	12 - 13	Connectorised Block Terminals (CBT)	229 - 230
Cable, Ultra Lightweight (ULW)	12	Containers	144
Cabling Links	211	Containers, Fuel	144
Canvas Sheet	130	Containers, Water	144
Capping	224	Continuous Duct Rod & Accessories	176
Capping Adaptors	224	Coping Saws	91
Capstan Winch	189	Cordless Combi Drills	108
Catenary Kits	220	Cordless Drill Drivers	108
Caulking Gun	240	Cordless Drivers	108
CBT Pole Brackets	230	Cordless SDS Plus Rotary Hammer Drills	107
Chain Puller	213	Crayon Markers	143
Chains	152	Crimping Pliers	98
Chambers and Covers	185	Crimping Pliers	99
Chisel Bar	137	Crimping Tool, Handheld Hydraulic	99
Chisels	79	Crimping Tool, Mechanical	99
Chuck Adaptor Kit	109	Crimping Tool, Ratchet	99
Clamp Guide 2A	204	Crimping Tools, Hydraulic	100
Clamp Meters	60	Crowbars	137
Clamp, Aerial Drop Cable	219	Cutting Discs	141
Clamp, Drop Cable Mandrel	219	Cutting Pliers	82
Claw Hammers	78		
Cleaning Cloths	38	D	
Cleaning Cloths, Wipes & Buds	34	DC to AC Inverter	134
Cleaning Fluids	37, 38	De-Icer	151
Cleaning Rags	157	De-Ionised Water	38
Cleaning Wipes	156	Desiccants	239
Clearance Rods (Telescopic)	216	Digging Bar	136
Cleavers & Cleaver Accessories	31	Distance Measuring Wheel	138
Club Hammers	78	Distance Meters, Laser	207
Coach Screws	221	Drain Rod Sets	183
Coax Jacket Strippers	104	Drawrope	204
Collet Locking Tool	27	Drawrope Dispenser	208
Combination Pliers	81	Drill Bits	111 - 113
Combination Spanners	94	Driva Wall Plugs	246
Commando Plug	133	Drop Cable	231
Commando Socket	133	Drop Cable Reusable Drums	210
Compaction Plates	140	Dropfibre Splitters	21
Compressors	19	Dropwire Brackets	222
Concrete	142	Dropwire Cable	216
Connector Cleaning Tools	33-34	Dropwire Clamps	217

Index

Dropwire Pulleys	216	Fast-Fit Tool	98
Duct & Accessories	195 - 197	Fibre Cable	12 - 13
Duct Bag Grips	199	Fibre Cable Analysers	44
Duct Brush	198	Fibre Cleaners	35 - 36
Duct Cameras	206	Fibre Cleaning Buds	37
Duct Cutter	26	Fibre Laser Warning Label	39
Duct Leader & Followers	180	Fibre Locking Mechanism	215
Duct Mandrel	198	Fibre Optic Cleaning Kits	33
Duct Motor	199	Fibre Optic Closures & Accessories	232-235
Duct Mouth Rollers	203	Fibre Optic Dead End	217
Duct Rod Adaptors	180	Fibre Optic Overhead Cable Strippers	20
Duct Rod Brass End Fitting	178	Fibre Optic Stripping Pliers	22
Duct Rod Guided Tips	178	Fibre Optic Stripping Tools	22
Duct Rod No.3	181	Fibre Optic Wall Outlets	237
Duct Rod Pusher	177	Fibre Sharp Bin	37
Duct Rod Repair Kits	177	Fillers	242
Duct Rod U-Shackle	178	Fire Bags	241
Duct Rods	179	Fire Blankets	154
Duct Rods Coupling Up Pieces	180	Fire Brigade Keys	152
Duct Sealant 16A	239	Fire Extinguishers	154
Duct Sealing	200 - 201	Firebreak Sealant	240
Dust Pan	146	First Aid	153
Dust Sheet	146	Fish Tapes	184
Dustbin, Plastic	144	Flexible Duct Leaders	178
E			
Ear Defenders	165	Foundation Bolts	189
Electricians Pliers	80	Frame Cable Dispensers	208
Electronic Flush Cutters	80	FTTx Cable Slitter	25
Excavating Spoons	136	FTTx Tool Kit	50
Expanding Eyebolt	222	FTTx Wedge Anchor Clamps	215
Extension Lead	133	Fuel Containers	144
External Blown Fibre	13	Fusion Splicers	28 - 30
External Cable Protector	125	G	
External Duct Fibre	13	Gas Detector	63 - 64
External Fibre Distribution Boxes	237	Generator, Petrol	130
Eyeshields	166 - 167	Glasses, Safety	166 - 167
F			
Face Masks	168	Gloves	169 - 171
Fast-Fit Plug	98	Gloves, Anti-Slip	170
		Gloves, Cut Resistant	169, 170
		Gloves, Gripper	170
		Gloves, Insulated	171

R			
Rabbiting Spade	136	Self Adhesive Tie Bases	254
Rapstraps	253	Self Grip Pliers	85
Ratchet Wrenches	94	Set Squares	97
Ratcheting Screwdrivers	88	Shear Pins	181
Ratcheting Screwdrivers	96	Shovel Holers	137
Reel Cleaner	36	Shovels	135
Resins	239	Side Cutters	80
Respirators	168	Side Cutting Pliers	81
Rigging Heads	211	Silicone Sealant	240
Rigging Weights	213	Site Transformer	133
Rigid Conduit Space Bar Saddles	244	Sledge Hammers	78
Road Signs & Cones	126 - 127	Slick Line	204
Road Signs, Flexible	127	Sling Wire Rope	213
Rod Kit, Fibreglass	206	Slippery Fish	23
Rope Guiding Rollers	203	Socket Sets	95
Rope Lanyard	163	Sound Level Meter	60
Rope Tape	211	Spades & Excavation Tools	135 - 137
Rubber Mallets	78	Spill Kits	130
		Spill Protector	130
		Spin In Resin Capsules	246
		Spiral Binding	40
		Spirit Levels	96
		Splice Protectors	39 - 40
		Splicer Accessories	30
		Splicers Work Tables	32
		SST-Drop Cable Access Tool	236
		Stainless Steel Cable Ties	252
		Staple Guns	249
		Staples	249 - 250
		Steel Capping	224
		Steel Rule	97
		Steel Wire Grip	221
		Steel Wire Tensioners	221
		Steel Wire Thimbles	221
		Steel Wires	220
		Stools, Folding Step Stool	130
		Stools, Jointers	130
		Storage Bins, Stackable	77
		Strapping	151
		Stripping Tools	21
		Stud Detection	111
S			
Safe-D Flame Retardant Trunking Cable Clips	244		
Safety Helmets & Accessories	164		
Safety Signage	152		
Sandbags	127		
Sanitisers	157		
Sash Line	211		
Sash Line Dispenser	211		
Satellite & Terrestrial TV Meters	61		
Saw, Petrol Cut Off	141		
Scissors	86		
Scissors, Kevlar	22		
Scoring Tool	26		
Screen Wash	151		
Screwdriver Bit Sets	89		
Screwdriver Sets	87		
Screwdrivers - Phillips	88		
Screwdrivers - Pozidrive	88		
Screwdrivers - Slotted	88		
Self Adhesive Fixings	253		

Index

Steel Wire Thimbles	221	Tile Lifting Tools	151
Steel Wires	220	Tinsnips	86
Stools, Folding Step Stool	130	Tone Probes & Generators	56 - 57
Stools, Jointers	130	Tool Bags & Cases	73 -75
Storage Bins, Stackable	77	Tool Belt	74
Strapping	151	Tool Boxes & Hard Cases	75 - 77
Stripping Tools	21	Tool Kits	67 - 72
Stud Detection	111	Tool Organisers	77
Subduct Cutter	85	Tool Vest	74
Sump Grills	189	Torches	158
Suspension Clamps	219	Torque Wrenches	95
Swivel Connector	178	Torx Screwdrivers	88
Swivel Connectors	181	Transportation Tube Kit	40
Syringes	39	Trench Covers & Road Plates	124
T			
Tapes, Ahesive Rubber	248	Trench Rammers	140
Tapes, Cabling Adhesive	247	Trolleys, Trucks & Tables	147
Tapes, Conductive	247	Trowels	145
Tapes, Double Sided	247	Trunking, Duct & Pipe Cutters	85, 116
Tapes, Hazard & Barrier	248	Tweezers	27
Tapes, Masking	247	Twin Mobile Radios	160
Tapes, Poly	248	Twister Pole	212
Tapes, PVC	247	Tyre Depth Measurement	150
Tapes, Sealing	248	Trench Rammer	121
Tapes, Self Amalgamating	247	Trenching Shovels	116
Tapes, Waterproof	247	Trolleys, Trucks & Tables	128
Tarmac & Concrete Reinstatement	142	Trowels	126
Tarmac Over-Banding Tape	143	Trunking, Duct & Pipe Cutters	69
TDUX Duct Sealing System	200	Tweezers	25
Telephone Line Testers	57	Tyre Pressure Gauge	132
TENIO Brackets	187	Trunking, Duct & Pipe Cutters	69
Tensioners	221	Tweezers	25
Tensioning Straps	214	Tyre Pressure Gauge	132
Tent, Street Cabinet & Pole Covers	128	U	
Tents, Jointers	128 - 129	Ultra Lightweight (ULW) Fibre Cable	12
Termination Tool	102	Umbrella, Contractors	129
Test Cords, Voice	56	Umbrella, Jointers	129
Test Telephones	55	Underground Marker Tapes	197
Thinners	39	Universal Pole Bracket	218
Tie Bases	253 - 254	Universal Strippers	103

V

Vacuum Cleaners	149
Van Vaults	150
VDE Plier and Screwdriver Set	83
Vehicle Daily Check & Defect Book	150
Vehicle Essentials	150 - 151
Ventilator 110V	131
Video Inspection Probe	49
Visual Fault Locators (VFLs)	48, 50, 52
Voltage Testers	59

W

Wall Dog Screws	245
Wall Plates	222
Wall Plugs	246
Warning Labels	257
Washers, Galvanised	223
Water Containers	144
Water Pumps	132

Water Sampling Kit	132
Waterproof Sheet	130
Waterpump Pliers	85
Wax String	211
Web Separating Tool	20
Wheelbarrow	143
Wire & Jacket Strippers	103 - 105
Wire Insertion Tools	101-102
Wire Strippers	116
Wood Chisels	79
Wood Screws	245
Workbenches	148
Working at Height / Fall Arrest	161-163
Worklamp	159
Wrecking Bars	137 - 138
Wrist Strap Tester	60

Z

Zinc Carbon Batteries	134
-----------------------	-----

UK/Europe

www.comtecdirect.co.uk

Comtec Huntingdon

Head Office and Main Distribution Centre
Cardinal Way
Cardinal Distribution Park
Godmanchester
Huntingdon
England
PE29 2XJ
Phone: +44 (0)1480 415414
Email: sales@comtecdirect.co.uk

Comtec Glasgow

Trade Counter & Sales Office
20 Couper Street
Glasgow
G4 0DL
Phone: +44 (0)141 564 1234
Email: glasgow@comtecdirect.co.uk

Middle East

www.comtecdirect.me

Comtec UAE

Sales Office
Office 307
PO Box 75633
Building 6
Bay Square
Business Bay
Dubai, UAE
Phone: +971 4551 0677
Email: uae@comtecdirect.me

Comtec Oman

Trade Counter & Sales Office
PO Box 2074
Postal Code 133
Al Khuwair, Muscat
Sultanate of Oman
Phone: +968 22 0111 22
Email: oman@comtecdirect.me

Comtec Qatar

Trade Counter & Sales Office
Units 40 - 44
PO Box 82281
Building 11
Barwa Village
Doha
Qatar
Phone: +974 44 3535 86
Email: qatar@comtecdirect.me

Far East

www.comtecdirect.co.uk

Comtec Hong Kong

Trade Counter & Sales Office
Unit 1101A, 11/F Sunbeam Centre
27 Shing Yip Street
Kwun Tong
Kowloon
Hong Kong
Phone: +852 2311 2263
Email: sales@comtec-comms.com.hk

Contractors

Product Guide

Order online at comtecdirect.co.uk
Call 01480 415414