

Features:

- ◆ WE style IDC plugs
- ◆ Suitable for flat or round shaped cordage

Electrical Specifications


UL Applications	250 Volts AC Max. at 2 AMPS
Dielectric Withstanding Voltage	500 Volts AC
Insulation Resistance	100M Ω
Termination	Resistance 20M Ω max. after environmental testing

Mechanical

Cable to Plug Tensile Strength	20Pound Min
Durability	200 mating cycles

Material and Finish

Housing	Polycarbonate, UL94V or UL94V-2
Colour	Transparent
Contact Blade	Copper alloy
Conductor	Stranded and solid wire 24AWG, 26AWG
Gold Plating	3u" - 50u"

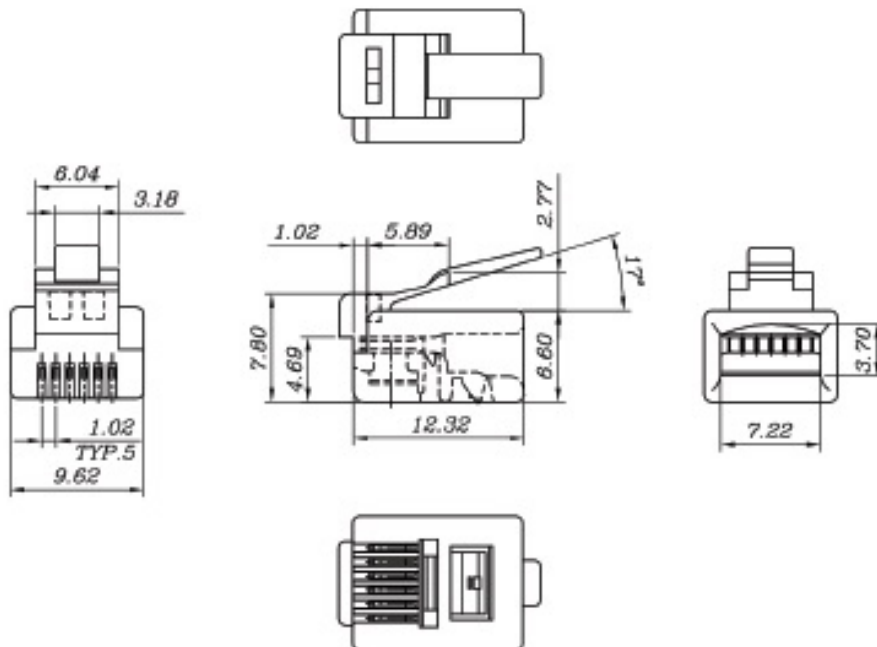

Part Number

Item	Plug	Position/Contacts
771071	RJ12	6P/6C