



CAT5E UTP LOW PROFILE MODULES



Technical information

Features:


- ◆ Low profile design - only 20mm deep
- ◆ Cat5e compliant performance
- ◆ 568B wiring
- ◆ Top, bottom or rear cable entry
- ◆ Compatible with all Ultima Euro faceplates
- ◆ 110 or LSA punchdown
- ◆ Cable strain relief facility
- ◆ Protected labelling facility
- ◆ 25 year Ultima System Warranty

Materials

| | |
|---------------------------------------|--|
| Fascia & RJ45 Jack Housing | ABS UL94V-0 |
| RJ45 Jack Contact | Material: Phosphor bronze, nickel plated. Finish: 50 micron gold plated on plug contact area |
| IDC Contact | Phosphor bronze, tin plated |
| Shutter | ABS UL94-HB |

Performance

| | |
|------------------------------|--|
| Insertion Force | 20N max. |
| Retention Strength | 7.7kg between Jack and Plug |
| Operating Temperature | -10°C to 60°C |
| Mating Cycles | 750 cycles min. |
| IDC Wire Range | 23-26 AWG stranded or solid wire. Compatible with 110 and LSA punch down tools |

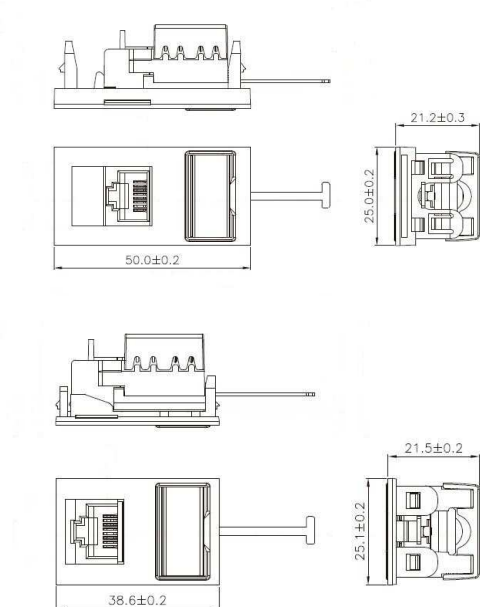

Part Number

| Item | Description | Type | Style | Colour |
|--------|--------------------|------------|-------|--------|
| 771836 | Low Profile Module | Unshielded | Euro | White |
| 787117 | Low Profile Module | Unshielded | Euro | Black |
| 772412 | Low Profile Module | Unshielded | LJ6c | White |