

Cabling infrastructure solutions in today's market are driving towards greater networking speeds. An effective cable management solution is crucial to maintaining the performance of the network. Schneider Electric's new Ultimate 62 trunking has been designed to support and maintain the integrity of your data solution. Ultimate 62 meets and exceeds the requirements for ANS/TIA/EIA, ISO/IEC11801 and EN50174-2.

With a dedicated data compartment and a depth of 62mm, Ultimate 62 can offer a 50mm bend radius for internal and external bends, flat angles and tees, whilst incorporating an elegant and stylish look. This makes Ultimate 62 a totally integrated solution for CAT5e, CAT6, CAT7 and fibre optic cables.

**Technical data**

- Material: uPVC
- Colour: white. RAL colour options available
- 3m lengths
- 2 compartments
- Pre-drilled base
- Deeper profile 190 x 62mm
- Standard fittings provided for 50mm minimum bend radius
- Dedicated compartment for data cabling - holds up to 48 UTP or 42 STP CAT6 data cables
- Screw fix for fittings giving added security
- Accommodates socket mounting boxes up to 50mm deep
- Accepts all leading wiring accessories
- Increased depth allows for extra capacity for CAT5e, CAT6, CAT6 Augmented, CAT7 data and fibre optic cabling
- Cable capacities shown in technical section
- Meets and exceeds ANS/TIA/EIA, ISO/IEC 11801 and EN50174-2
- Optional 60mm divider for top compartment
- Pre-punched steel divider for compartment divider
- BS4678 Pt.4, BS7671 (IEE regs), BS6701 (2004), BSEN50173, (Cenelec)
- BSEN50174-2, ANSI/TIA/EIA 568B and ISO/IEC11801
- Available pre-wired
- Part M DDA compliancy available
- Antimicrobial available

**Trunking assembly**

Ref	Packed
<b>CU2W</b>	2 x 3m

Supplied with 30mm deep power divider

**Trunking assembly complete with upper grey lid**

Ref	Packed
<b>CU2WCLL3G</b>	2 x 3m

**Part M - DDA compliant**

**Antimicrobial available**

**Divider**

Ref	Packed
<b>CUD2W</b>	16 x 1.5m

**Spacing Lid cover**

Ref	Packed
<b>CCS3W</b>	10

**Spare Lid packs**

Ref	Description	Packed
<b>CLL3W</b>	Top (larger)	2 x 3m
<b>DLN2W</b>	Bottom (smaller)	2 x 3m

**Cat 6 Compliancy**

The Ultimate 62 trunking system has a dedicated compartment for data cabling with depth of 60mm that can hold up to 48 UTP or 42 STP CAT6 cables.



External angle		
Ref		Packed
CUXB2W		1

Cover and back section for screw fix.



Internal angle		
Ref		Packed
CUIB2W		1

Cover and back section for screw fix.



Joint cover		
Ref		Packed
CUJ2W		1



End caps		
Ref		Packed
CUS2LW	LH	2
CUS2RW	RH	2




Flat angle		
Ref		Packed
CUF2RW	Riser	1
CUF2DW	Dropper	1

Complete with integral data cable guides.



Flat tee		
Ref		Packed
CUT2RW	Riser	1
CUT2DW	Dropper	1

Complete with integral data cable guides.

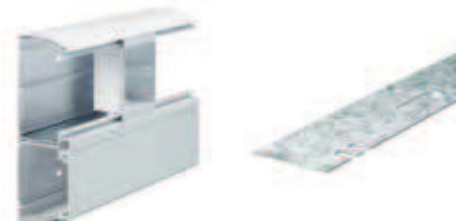

Screening divider		
Ref	Type	Packed
SS43	43mm x 1mm	4 x 1.5m

With oval knockouts at 300mm intervals.



Continued screening		
Ref		Packed
SSX43	External	1
SSI43	Internal	1

For continued screening around external/internal angles.



Earth tags		
Ref		Packed
SET1		10