

# ULTIMA SINGLEMODE PIGTAILS

## Technical information



Ultima pigtails are manufactured to the highest standards using 900µm tight buffered fibre.


Used in conjunction with Ultima splice protectors they can be spliced onto the end of horizontal fibre cable to provide high performance optical connections with minimum install time.

### Features:

- ◆ Low Smoke Zero Halogen jacket
- ◆ Strain relief boot to protect fibre
- ◆ 900µm tight buffered fibre
- ◆ Individually packaged
- ◆ Batch tracking with unique pigtail ID
- ◆ Wide operating temperature range
- ◆ Consistent performance

### Specification

Standards	LC Connector manufactured to IEC 61754-20
	FC Connector manufactured to IEC 61754-13
	SC Connector manufactured to IEC 61754-4
	ST Connector manufactured to IEC 61754-4

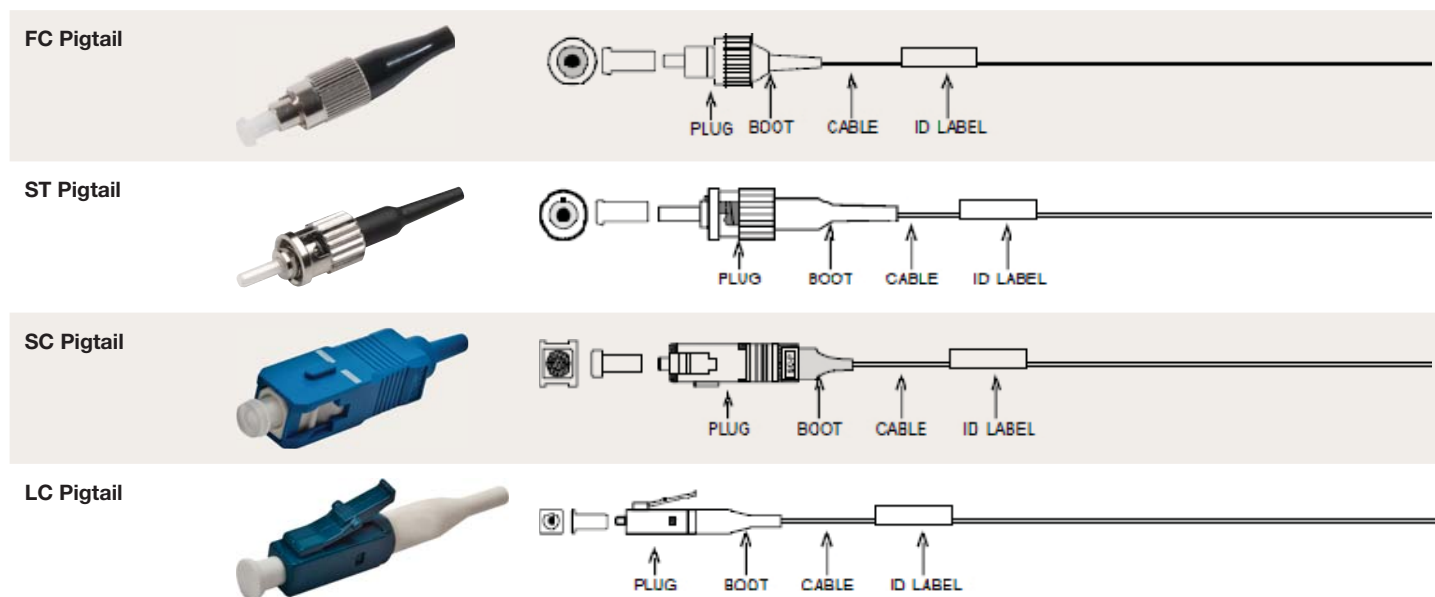

### Part Numbers

	Item	Type	Length	Colour	Insertion Loss (dB)	Operating Temperature	Max Attenuation (dB)/km		
							1300nm	1383nm	1550nm
<b>OS1 – 9/125µm</b>	773125	Tight Buffered SingleMode FC	1Mtr	Yellow	≤ 0.30	-40°C ~ +75°C	0.4	0.4	0.4
<b>OS2 – 9/125µm</b>	782382	Easy Strip SingleMode FC/APC	1.5Mtr	White	≤ 0.30	-40°C ~ +75°C	0.4	0.4	0.4
	794943	Tight Buffered SingleMode FC	1.5Mtr	Yellow	≤ 0.30	-40°C ~ +75°C	0.4	0.4	0.4
	775572	Tight Buffered SingleMode LC	1Mtr	Yellow	≤ 0.30	-40°C ~ +75°C	0.4	0.4	0.4
	794777	Tight Buffered SingleMode LC	1.5Mtr	Yellow	≤ 0.30	-40°C ~ +75°C	0.4	0.4	0.4
	782390	Tight Buffered SingleMode SC/APC	1Mtr	White	≤ 0.30	-40°C ~ +75°C	0.4	0.4	0.4
	772886	Tight Buffered SingleMode ST	1Mtr	Yellow	≤ 0.30	-40°C ~ +75°C	0.4	0.4	0.4
	772887	Tight Buffered SingleMode SC	1Mtr	White	≤ 0.30	-40°C ~ +75°C	0.4	0.4	0.4
	794778	Tight Buffered SingleMode SC	1.5Mtr	Yellow	≤ 0.30	-40°C ~ +75°C	0.4	0.4	0.4