
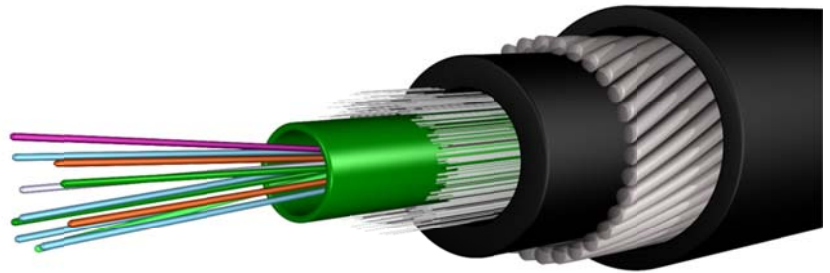


I 101: UC^{FIBRE} Steel wire armoured central tube cable

Central tube cable w 2 – 24 fibres, glass elements, Afumex[®] sheath, steel wire armouring ø0.6 mm and outer Afumex[®] sheath. DIN/VDE: U-DQ(ZN) H W H

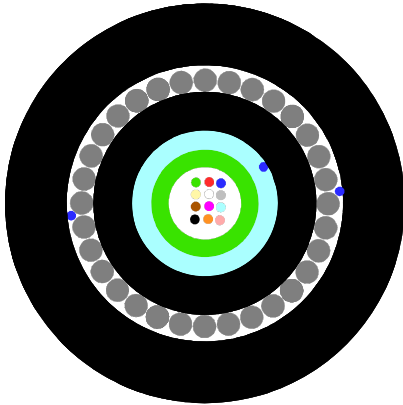

Application and Installation

This cable can be used for LAN and WAN backbones, telecom access lines, fibre to business and fibre to the building drop connections as well as fibre to the home drop and access connections.

With its LSHF sheathing this cable is ideal for mixed indoor and outdoor installation. It is equally suited for installation in ducts and on trays.

Standards

ISO 11801 2nd edition

EN 50173-1:2002

IEC 60794-1

Construction

Loose tube	Ø2.8 mm jelly filled green colored loose tube with 2 – 12 fibres; Ø3.5 mm loose tube with 24 fibres			
Fibre colour code	1	Red	13	Yellow w/mark every 100 mm
	2	Green	14	White w/mark every 100 mm
	3	Blue	15	Grey w/mark every 100 mm
	4	Yellow	16	Turquoise w/mark every 100 mm
	5	White	17	Orange w/mark every 100 mm
	6	Grey	18	Pink w/mark every 100 mm
	7	Brown	19	Yellow w/mark every 50 mm
	8	Violet	20	White w/mark every 50 mm
	9	Turquoise	21	Grey w/mark every 50 mm
	10	Black	22	Turquoise w/mark every 50 mm
	11	Orange	23	Orange w/mark every 50 mm
	12	Pink	24	Pink w/mark every 50 mm
Strength member	Waterblocked E-Glass fibre elements			

I 101: UC^{FIBRE} Steel wire armoured central tube cable

Ripcord	1
Inner sheath	1.0 mm black Afumex® , Halogen free, flame resistant thermoplastic sheathing compound acc. to EN 50290-2-27, UV stabilised
Armouring	ø0.6 mm zinc coated soft steel wires
Ripcords	2
Over sheath	1.4 mm black Afumex® , Halogen free, flame resistant thermoplastic sheathing compound acc. to EN 50290-2-27, UV stabilised

Fire rating

IEC 60332-1-2	Single vertical wire test
IEC 60754-1	No halogens
IEC 60754-2	No acid matters
IEC 61034-2	No dense smoke

Physical properties

IEC 60794-1

Nominal outer diameter	-	2 - 12 fibres: 9.8 mm 18 - 24 fibres: 10.4 mm
Nominal weight	-	2 - 12 fibres: 172 kg/km 18 - 24 fibres: 180 kg/km
Maximum installation tensile strength	E1	3000 N (fibre strain less than 1/2 of proof test level)
Short term tensile strength	E1	2000 N (fibre strain less than 1/3 of proof test level)
Permanent tensile strength	E1	1000 N (no attenuation change, fibre strain less than 1/4 of proof test level)
Compressive strength (crush)	E3	2000 N
Impact	E4	15 Nm (no attenuation change, no broken cable elements)
Torsion	E7	5 cycles ± 1 turn
Kink	E10	The cables do not form a kink when a loop is drawn together to a diameter of 20xD (Cable diameter) mm
Min. bending radius, unloaded	E11	R = 160 mm
Min. bending radius, loaded	-	R = 160 mm
Temperature range	F1	Storage: -40°C to +60°C Installation: -10°C to +50°C Operation: -30°C to +60°C.
Water penetration	F5B	No water on free end (core excl. armouring)

Sheath marking

Draka I/O CT D SWA LSHF <Fibre count> <Fibre type><Fibre brand><Item No>22<Batch Number><Meter mark> U-D Q (ZN)H W H <Fibre count> <Fibre family> <Mode field diameter> /125 <Transmission Class>

I101: UC^{FIBRE} Steel wire armoured central tube cable

Product codes – ordering information

Prysmian group material code	Prysmian Group material description	Fibre count	Fibre type	Fibre data sheet
	UC ^{FIBRE} I/O CT D SWA LSHF 4 OM2B	4	MaxCap-BB-OM2 50/125	C34
	UC ^{FIBRE} I/O CT D SWA LSHF 8 OM2B	8	MaxCap-BB-OM2 50/125	C34
	UC ^{FIBRE} I/O CT D SWA LSHF 12 OM2B	12	MaxCap-BB-OM2 50/125	C34
	UC ^{FIBRE} I/O CT D SWA LSHF 16 OM2B	16	MaxCap-BB-OM2 50/125	C34
	UC ^{FIBRE} I/O CT D SWA LSHF 24 OM2B	24	MaxCap-BB-OM2 50/125	C34
	UC ^{FIBRE} I/O CT D SWA LSHF 4 OM3B	4	MaxCap-BB-OM3	C31
	UC ^{FIBRE} I/O CT D SWA LSHF 8 OM3B	8	MaxCap-BB-OM3	C31
60033430	UC ^{FIBRE} I/O CT D SWA LSHF 12 OM3B	12	MaxCap-BB-OM3	C31
	UC ^{FIBRE} I/O CT D SWA LSHF 16 OM3B	16	MaxCap-BB-OM3	C31
	UC ^{FIBRE} I/O CT D SWA LSHF 24 OM3B	24	MaxCap-BB-OM3	C31
	UC ^{FIBRE} I/O CT D SWA LSHF 4 MM61	4	OM1 62.5/125 multi mode	C02
	UC ^{FIBRE} I/O CT D SWA LSHF 8 MM61	8	OM1 62.5/125 multi mode	C02
	UC ^{FIBRE} I/O CT D SWA LSHF 12 MM61	12	OM2 62.5/125 multi mode	C02
	UC ^{FIBRE} I/O CT D SWA LSHF 16 MM61	16	OM1 62.5/125 multi mode	C02
	UC ^{FIBRE} I/O CT D SWA LSHF 24 MM61	24	OM1 62.5/125 multi mode	C02
	UC ^{FIBRE} I/O CT D SWA LSHF 4 SM2D	4	OS2 single mode	C03e
	UC ^{FIBRE} I/O CT D SWA LSHF 8 SM2D	8	OS2 single mode	C03e
	UC ^{FIBRE} I/O CT D SWA LSHF 12 SM2D	12	OS2 single mode	C03e
	UC ^{FIBRE} I/O CT D SWA LSHF 16 SM2D	16	OS2 single mode	C03e
60033429	UC ^{FIBRE} I/O CT D SWA LSHF 24 SM2D	24	OS2 single mode	C03e
	UC ^{FIBRE} I D LSHF-FR ES9 4 SM7B	4	BendBright [®] XS G.657.A2	C24
	UC ^{FIBRE} I D LSHF-FR ES9 8 SM7B	8	BendBright [®] XS G.657.A2	C24
	UC ^{FIBRE} I D LSHF-FR ES9 12 SM7B	12	BendBright [®] XS G.657.A2	C24
	UC ^{FIBRE} I D LSHF-FR ES9 16 SM7B	16	BendBright [®] XS G.657.A2	C24
	UC ^{FIBRE} I D LSHF-FR ES9 24 SM7B	24	BendBright [®] XS G.657.A2	C24

© PRYSMIAN GROUP 2012, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.