

FUSION SPLICE PROTECTORS



Specifications

<i>Materials:</i>	<i>Outer tube</i>	<i>Polyolefin Heat Shrinkable</i>
	<i>Inner tube</i>	<i>Ethylene-Vinyl Acetate</i>
	<i>Strength member</i>	<i>Stainless Steel</i>
	<i>Operating Temperature</i>	<i>(-)10*c to (+) 50*c</i>

Construction

Stainless steel rod and EVA inner sleeve centralised inside the outer heat shrink sleeve. The outer sleeve can be pre shrunk at each end to make insertion of fibre cable easier, on the larger range of fusion splices.

Other options available are :-

Banded Sleeves:- for Standard Splice Protectors


Suffix B added to part no to indicate silicon sleeve fitted in the centre of the outer sleeve to minimise vibration when fitted in splice tray. Typical part no would be FOJ3A45-10B. Supplied in clear with silicon sleeve

Pre Shrink:- for Micro Splice Protectors

Suffix M added to part no to indicate a pre shrink in the centre of the outer heat shrink sleeve to contain all components during transportation and installation.

Example:-

Typical part no in green with pre shrink would be FOJ4B40-5M

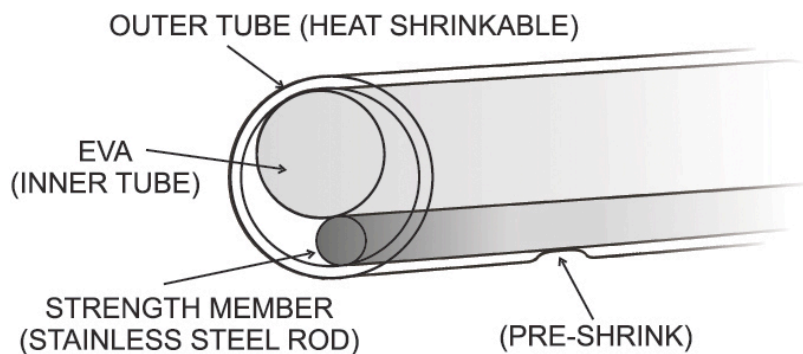

Splice Protectors

Majortek Part number	Length	Internal Diameter (mm)		Clear	Colours
		Outer Sleeve	EVA		
FOJ100	61mm	2.4	1.2	yes	yes
FOJ200	61mm	3.2	1.8	yes	yes
FOJ500	61mm	3.2	1.8	yes	
FOJ600	68mm	4.0	2.2	yes	
FOJ3A30	30mm	2.4	1.2	yes	yes
FOJ3A35	35mm	2.4	1.2	yes	yes
FOJ3A40	40mm	2.4	1.2	yes	yes
FOJ3A45	45mm	2.4	1.2	yes	yes

Micro Splice Protectors

FOJ4B25	25mm	1.6	1.0	yes	yes
FOJ4B35	35mm	1.6	1.0	yes	yes
FOJ4B40	40mm	1.6	1.0	yes	yes
FOJ4C40	40mm	1.2	0.8	yes	
FOJ4D10	10mm	1.2	1.0	yes	
FOJ4D15	15mm	1.2	1.0	yes	
FOJ4D35	35mm	1.2	1.0	yes	
FOJ4D45	45mm	1.2	1.0	yes	

All dimensions shown are nominal in mm.

Supplied Tolerances are:-

- (+) or (-) 1mm on length
- 10% on internal dimensions

Where applicable Fusion Splices meet the requirements of DIN EN 50411-3-3

Approvals of our range are also held by British Telecom

Specifications

<i>Materials:</i>	<i>Outer tube</i>	<i>Polyolefin Heat Shrinkable</i>
	<i>Inner tube</i>	<i>Ethylene-Vinyl Acetate</i>
	<i>Strength member</i>	<i>Stainless Steel</i>
	<i>Operating Temperature</i>	<i>(-)10*c to (+) 50*c</i>

Specifications and descriptions are subject to change without prior notice