

TECHNICAL DATA SHEET


CABLE REFERENCE : 8723 LSF (V.S) GRY

ISSUE NO. : 1

ISSUE DATE : AUG 15, 2013

CABLE CONSTRUCTION

Type	8723 LSF (V.S) GRY			
Test Standard	UL1581			
1. Conductor	Material	Stranded Tinned Copper		
	Nom.O.D.(mm)	0.24×7	Up	+0.008
			Down	-0.008
2. Insulation	Material	SPE		
	Diameter	1.20(+/-0.13)mm×2×2		
	Colours	(White,Green)/(Red,Black)		
3. Shield	Material	AL-foil		
	Colour	Blue		
4. Drain	Material	Stranded Tinned Copper		
	Nom.O.D.(mm)	0.19×7	Up	+0.008
			Down	-0.008
5. Jacket	External O.D.mm	4.20(+/-0.20)		
	Surface	Clean, Smooth		
	Material	LSF-PVC		
	Colour	Grey		
Electrical Characteristics	Item	Standard		
	Conductor Resistance @ 20°C		< 6.53 Ω/100M	
	Min.Insulation DC Resistance @ 20°C		>200 MΩ*M	
	Rated Volage		600V	
	Rated Temperature		80°C	

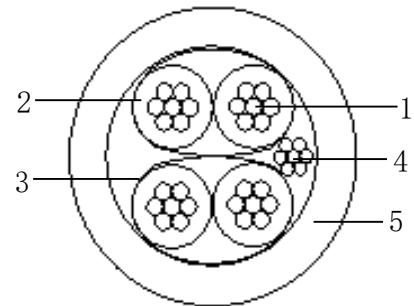

Information in this data sheet supplied to users is based on general experience and is given in good faith, but because of the many particular factors which are outside our knowledge which affect the use of the products, no warranty is given nor is to be implied with respect to such information. Users should make their own enquiries to determine the stability of products for any particular use.