

760010371 | Z-048-DS-5L-FMUBK

LazrSPEED® Indoor/Outdoor Low Smoke Zero Halogen Riser Distribution Cable, 48 fiber multi-unit with 12 fiber subunits


Product Classification

Portfolio	CommScope®
Brand	LazrSPEED®
Product Type	Fiber indoor/outdoor cable
Regional Availability	Asia Australia/New Zealand EMEA Latin America North America

Standards And Qualifications

EN50575 CPR Cable EuroClass B2ca | s1b | d0 | a1

Representative Image

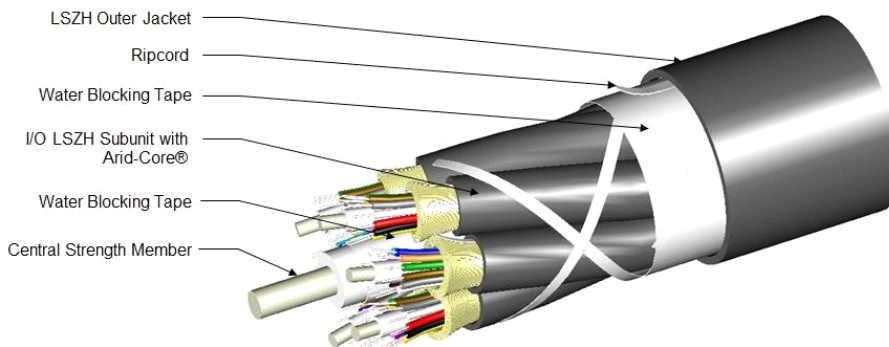

General Specifications

Construction Type	Non-armored
Cable Type	Distribution
Fiber Short Description	Z-048-DSMU
Subunit Type	Gel-free

Construction Materials

Total Fiber Count	48
Fiber Type	LazrSPEED® 300, 50 µm multimode fiber (OM3)
Fiber Type Solution	LazrSPEED® 300, 50 µm multimode fiber (OM3)
Fiber Type, quantity	48
Fibers per Subunit, quantity	12
Jacket Color	Black
Jacket UV Resistance	UV stabilized

Dimensions

Buffer Tube/Subunit Diameter	7.20 mm 0.28 in
------------------------------	-------------------

760010371 | Z-048-DS-5L-FMUBK

Cable Weight	206.0 lb/kft 307.0 kg/km
Diameter Over Jacket	19.50 mm 0.77 in
Subunit, quantity	4

Physical Specifications

Minimum Bend Radius, loaded	29.2 cm 11.5 in
Minimum Bend Radius, unloaded	19.5 cm 7.7 in
Tensile Load, long term, maximum	240 lbf 1068 N
Tensile Load, short term, maximum	800 lbf 3560 N
Vertical Rise, maximum	354.0 m 1161.4 ft

Flame Test Specifications

Flame Test Listing	NEC OFNR-LS (ETL) and c(ETL)
Flame Test Method	IEC 60332-3 IEC 60754-2 IEC 61034-2 IEEE 383 UL 1666 UL 1685

Environmental Specifications

Environmental Space	Low Smoke Zero Halogen (LSZH) Riser
Installation Temperature	-30 °C to +60 °C (-22 °F to +140 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)

Mechanical Test Specifications

Compression	126 lb/in 22 N/mm
Compression Test Method	FOTP-41 IEC 60794-1 E3
Flex	100 cycles
Flex Test Method	FOTP-104 IEC 60794-1 E6
Impact	4.34 ft lb 5.88 N-m
Impact Test Method	FOTP-25 IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1 E7
Water Penetration	24 h
Water Penetration Test Method	FOTP-82 IEC 60794-1 F5

Environmental Test Specifications

Cable Freeze Test Method	IEC 60794-1 F15
Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-40 °C to +70 °C (-40 °F to +158 °F)
Low High Bend Test Method	FOTP-37 IEC 60794-1 E11
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1 F1

760010371 | Z-048-DS-5L-FMUBK

Qualification Specifications

Cable Qualification Standards ANSI/ICEA S-104-696 | EN 187105 | Telcordia GR-20 (water penetration) | Telcordia GR-409

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



Included Products

CS-5L-TB (Product Component—not orderable) — LazrSPEED® 300 OM3 Bend-Insensitive Multimode Fiber

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable