

760074112 | N-072-DS-5K-FMUAQ

**LazrSPEED® Low Smoke Zero Halogen Riser Distribution Cable, 72 fiber multi-unit with 12 fiber subunits**


## Product Classification

Portfolio	CommScope®
Brand	LazrSPEED®
Product Type	Fiber indoor cable
Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America

## Standards And Qualifications

EN50575 CPR Cable EuroClass Dca | s1a | d1 | a1

## Representative Image

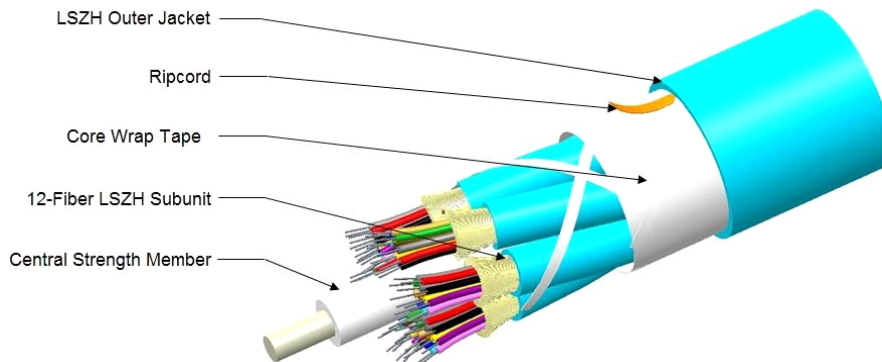

## General Specifications

Cable Type	Distribution
Construction Type	Non-armored
Subunit Type	Gel-free

## Construction Materials

Fiber Type Solution	LazrSPEED® 550, 50 µm multimode fiber (OM4)
Total Fiber Count	72
Fiber Type	LazrSPEED® 550, 50 µm multimode fiber (OM4)
Fiber Type, quantity	72
Fibers per Subunit, quantity	12
Jacket Color	Aqua

## Dimensions

Buffer Tube/Subunit Diameter 6.07 mm | 0.24 in

760074112 | N072-DS-5K-FMUAQ

Cable Weight	242.0 lb/kft   360.0 kg/km
Diameter Over Jacket	20.01 mm   0.79 in
Subunit, quantity	6

## Physical Specifications

Minimum Bend Radius, loaded	30.0 cm   11.8 in
Minimum Bend Radius, unloaded	20.0 cm   7.9 in
Tensile Load, long term, maximum	90 lbf   400 N
Tensile Load, short term, maximum	300 lbf   1335 N
Vertical Rise, maximum	113.0 m   370.7 ft

## Flame Test Specifications

Flame Test Listing	NEC OFNR-LS (ETL) and c(ETL)
Flame Test Method	IEC 60332-3   IEC 60754-2   IEC 61034-2   IEEE 383   UL 1666   UL 1685

## Environmental Specifications

Environmental Space	Low Smoke Zero Halogen (LSZH)   Riser
Installation Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Operating Temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)

## Mechanical Test Specifications

Compression	10 N/mm   57 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	100 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	4.34 ft lb   5.88 N-m
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7

## Environmental Test Specifications

Heat Age	-20 °C to +85 °C (-4 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-10 °C to +60 °C (+14 °F to +140 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1 E11
Temperature Cycle	-20 °C to +70 °C (-4 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

## Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-83-596   Telcordia GR-409
-------------------------------	---------------------------------------

## Regulatory Compliance/Certifications

---

Agency	Classification
RoHS 2011/65/EU	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system
CENELEC	EN 50575 compliant, Declaration of Performance (DoP) available



## Included Products

---

CS-5K-TB (Product Component—not orderable) — LazrSPEED® 550 OM4 Bend-Insensitive Multimode Fiber

### \* Footnotes

---

Operating Temperature Specification applicable to non-terminated bulk fiber cable