


6mm Recov. \emptyset d max. Heatshrink Sleeving HS1900

Heatshrink Sleeving, Article number: 857-40143



 Images (1)

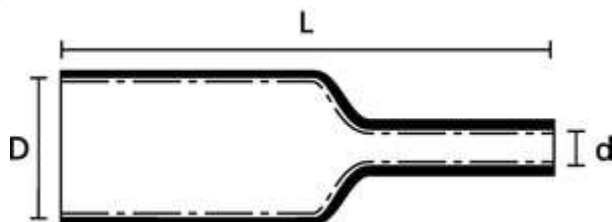

Features

- Available in 3 diameters and lengths to suit all port sizes
- Internal lining of hot melt adhesive provides environmental seal
- Visual correct shrinkage indication
- Suitable for use with branch sealing clips

More products in this product group

6mm Recov. \emptyset d max. Heatshrink Sleeving >

Base Data

Content	Heatshrink (x 10) Abrasive Strips (x 10) Aluminium Foil (100 x 130mm) (x10) Isopropyl Alcohol Wipes (x 20)
Description	Heatshrink Sleeving
GLOBAL PART DESCRIPTION	HS1900
Pack Cont.	10
Package Quantity per	Bag

Contact 

Port	R, B
Product Family	Heatshrink Sleeving
Product Group	6mm Recov. Ø d max. Heatshrink Sleeving
Technical Description	The HellermannTyton range of heatshink kits are crosslinked polyolefin with an internal lining of hot melt adhesive. The heatshrink sleeve has a coating of thermochromatic paint, which changes colour when the optimum temperature for shrinkage is achieved. The hot melt adhesive lining provides an environmental seal around the cable and port entry.
Type	HS1900

Product Dimensions

Length (L)	180 mm
Recov. Ø d	6 mm
Supplied Ø D	33 mm

Material and Specifications

Logistics and Packaging

More Information

ETIM 6.0	EC000217
----------	----------

Similar products

HS1899

857-40142

6mm Recov. Ø d max. Heatshrink Sleeving

HS1902

857-40145

12mm Recov. Ø d max. Heatshrink Sleeving

HS1903

857-40146

12mm Recov. Ø d max. Heatshrink Sleeving

9/4/2018	6mm Recov. Ø d max. Heatshrink Sleeving HS1900 (857-40143) HellermannTyton	
857-40318	857-40319	857-40316
16mm Recov. Ø d max. Heatshrink Sleeving	16mm Recov. Ø d max. Heatshrink Sleeving	16mm Recov. Ø d max. Heatshrink Sleeving

Show all ▾

Update: 01/09/2018

© HellermannTyton 2018