


## 1-Phase 230V 16A / 20A switched PDU + outlet measurement : C13 x 20 + C19 x 4



20A model :	Fuse	MCB
V20C13/4C19-20A-WSi/F_OE/3B-1	1	-
V20C13/4C19-20A-WSi/CR_OE/3B-1	-	1

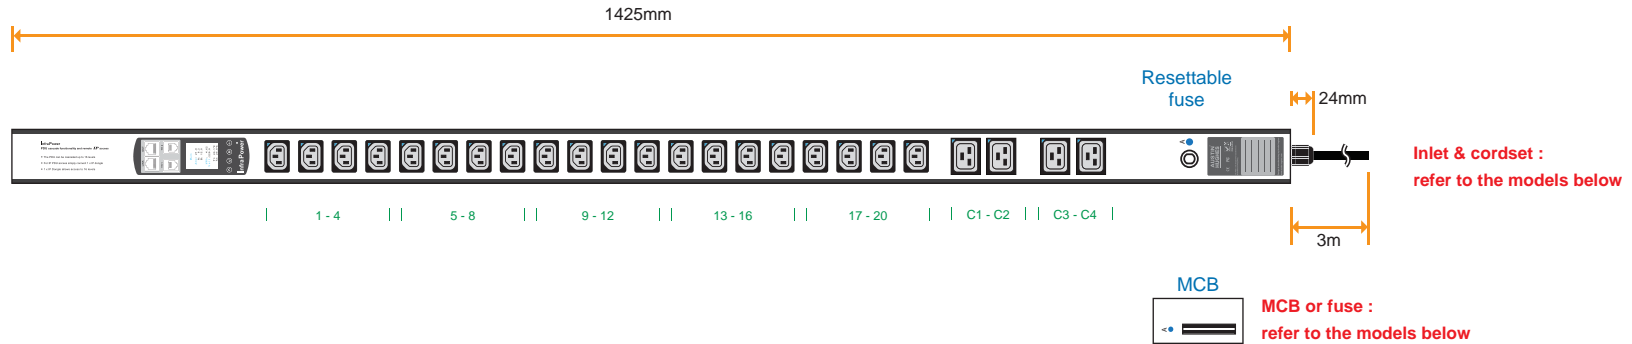

Input Rating : 20A, 230V  
 Inlet : 20A open end  
 Cordset : 3 meter 2.5mm sq. H05V V-F cordset  
 Protection : 20A resettable fuse or 20A hydraulic MCB x 1  
 Circuit Details : Output 20A max. C 13 #1-20 + C 19 #C1-C4

16A model :	Fuse	MCB
V20C13/4C19-16A-WSi/F_EN/3B-1	1	-
V20C13/4C19-16A-WSi/CR_EN/3B-1	-	1



Input Rating : 16A, 230V  
 Inlet : 16A IEC60309 2P+E plug  
 Cordset : 3 meter 1.5mm sq. H05V V-F cordset  
 Protection : 16A resettable fuse or 16A hydraulic MCB x 1  
 Circuit Details : Output 16A max. C 13 #1-20 + C 19 #C1-C4

16A model :	Fuse	MCB
V20C13/4C19-16A-WSi/F_C20/3B-1	1	-
V20C13/4C19-16A-WSi/CR_C20/3B-1	-	1



Input Rating : 16A, 230V  
 Inlet : 16A IEC320 C20 plug  
 Cordset : 3 meter 1.5mm sq. H05V V-F cordset  
 Protection : 16A resettable fuse or 16A hydraulic MCB x 1  
 Circuit Details : Output 16A max. C 13 #1-20 + C 19 #C1-C4

### Single phase switched PDU + outlet measurement

Outlet : 10A Rated IEC320 C13 x 20  
16A Rated IEC320 C19 x 4



The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2018 Austin Hughes Electronics Ltd. All rights reserved.

### Meter Features ( WSi Switched PDU + Outlet Measurement )

Local Display : Field replaceable 1.8" color LCD  
 Bank Measurement : Current ( A ), Energy ( kWh ), Voltage ( V ) & Power factor  
 Outlet Measurement : Current ( A ), Energy ( kWh )  
 Outlet Control : Outlet Switch ON / OFF  
 Accuracy : ±1% true RMS  
 IP Access : via IP dongle, one IP Access up to 16 PDU Levels  
 Cascade : Up to 16 PDU under single IP address via IP dongle  
 SNMP : via IP dongle  
 Sensor Port x 2 : Temp. Sensor / Temp. + Humid. Sensor

EMC Compliance : FCC & CE certified  
 Safety Compliance : CE / LVD certified  
 Environment Compliance : RoHS2 & REACH

Operating Temperature : -5 to 60 °C  
 Storage Temperature : -25 to 65 °C  
 Operating Altitude : 0 to 2,000 m  
 Storage Altitude : 0 to 15,000 m  
 Humidity : 8 to 95% RH, non-condensing

Dimension : 60 (W) x 90 (D) x 1425 (H) mm  
 Material : Extrusion  
 Color : Black