


Circuit A

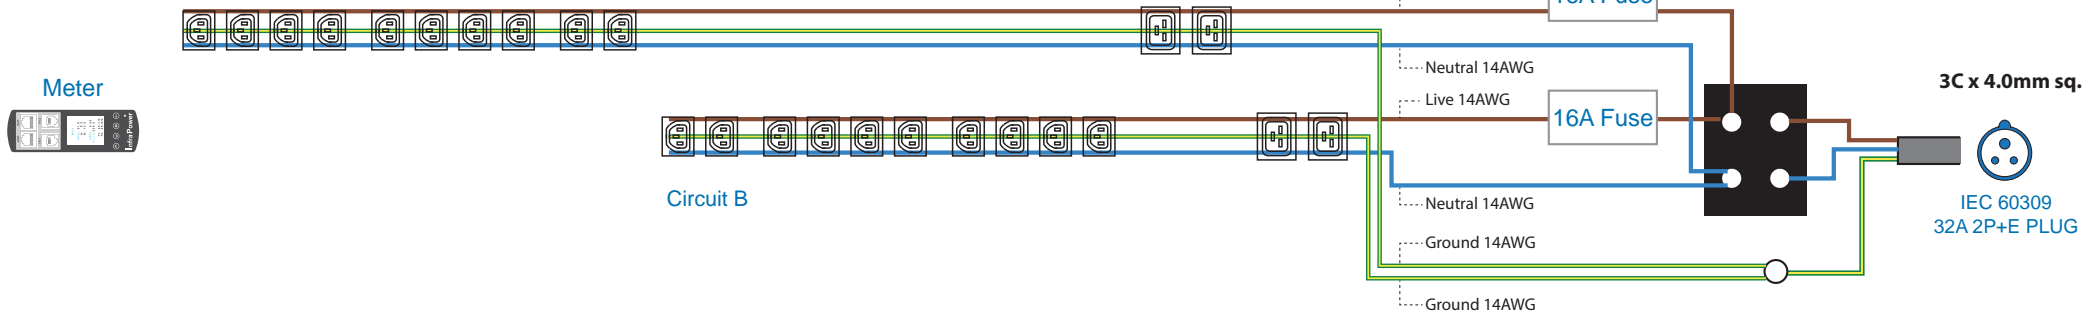

Single phase switched PDU + outlet measurement

Input Rating : 32A, 230V
 Outlet : 10A Rated IEC320 C13 x 20
 16A Rated IEC320 C19 x 4
 Inlet : 32A IEC60309 2P+E plug
 Cordset : 3 meter 4mm sq. H05V V-F cordset
 Protection : 16A resettable fuse x 2
 Circuit Details : < **Circuit A** > Output 16A max. C13 #1-10 + C19 #C1-C2
 < **Circuit B** > Output 16A max. C13 #11-20 + C19 #C3-C4

Meter Features (WSi Switched PDU + Outlet Measurement)

Local Display : Field replaceable 1.8" color LCD
 Bank Measurement : Current (A), Energy (kWh), Voltage (V) & Power factor
 Outlet Measurement : Current (A), Energy (kWh)
 Outlet Control : Outlet Switch ON / OFF
 Accuracy : ±1% true RMS
 IP Access : via IP dongle, one IP Access up to 16 PDU Levels
 Cascade : Up to 16 PDU under single IP address via IP dongle
 SNMP : via IP dongle
 Sensor Port x 2 : Temp. Sensor / Temp. + Humid. Sensor

EMC Compliance : FCC & CE certified
 Safety Compliance : CE / LVD certified
 Environment Compliance : RoHS2 & REACH
 Operating Temperature : -5 to 60 °C
 Storage Temperature : -25 to 65 °C
 Operating Altitude : 0 to 2,000 m
 Storage Altitude : 0 to 15,000 m
 Humidity : 8 to 95% RH, non-condensing
 Dimension : 60 (W) x 90 (D) x 1425 (H) mm
 Material : Extrusion
 Color : Black