



Circuit A



Circuit B

Meter

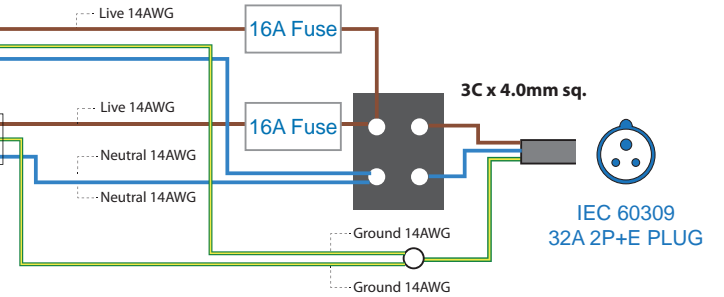

**Single phase monitored PDU**

Input Rating : 32A, 230V  
 Outlet : 10A Rated IEC320 C13 x 20  
 16A Rated IEC320 C19 x 4  
 Inlet : 32A IEC60309 2P+E plug  
 Cordset : 3 meter 4mm sq. H05V V-F cordset  
 Protection : 16A resettable fuse x 2  
 Circuit Details : < **Circuit A** > Output 16A max. C13 #1-10 + C19 #C1-C2  
 < **Circuit B** > Output 16A max. C13 #11-20 + C19 #C3-C4

**Meter Features ( W monitored PDU )**

Local Display : Field replaceable 1.8" color LCD  
 Bank Measurement : Voltage ( V ), Current ( A ), energy ( kWh ) & power factor  
 Accuracy : ±1% true RMS  
 IP Access : via IP dongle, one IP Access up to 16 PDU Levels  
 Cascade : Up to 16 PDU under single IP address via IP dongle  
 SNMP : via IP dongle  
 Sensor Port x 2 : Temp. Sensor / Temp. + Humid. Sensor

EMC Compliance	:	FCC & CE certified
Safety Compliance	:	CE / LVD certified
Environment Compliance	:	RoHS2 & REACH
Operating Temperature	:	-5 to 60 °C
Storage Temperature	:	-25 to 65 °C
Operating Altitude	:	0 to 2,000 m
Storage Altitude	:	0 to 15,000 m
Humidity	:	8 to 95% RH, non-condensing
Dimension	:	60 (W) x 60 (D) x 1425 (H) mm
Material	:	Extrusion
Color	:	Black