


## 1-Phase 32A metered PDU : C13 x 36 + C19 x 6

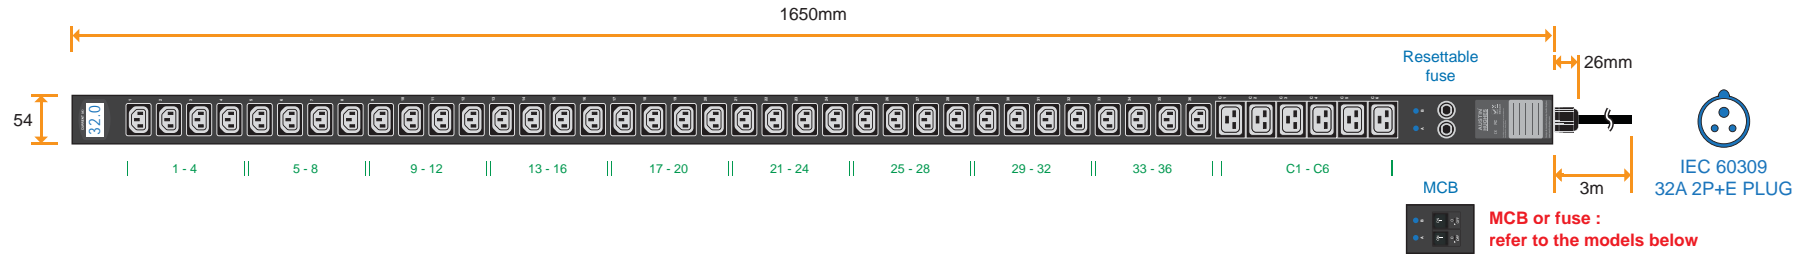

32A model :	Fuse	MCB
V36C13/6C19-32A-MD/F_EN/3B-1	2	-
V36C13/6C19-32A-MD/CR_EN/3B-1	-	2

Input Rating : 32A, 230V  
 Inlet : 32A IEC60309 2P+E plug  
 Cordset : 3 meter 4mm sq. H05V V-F cordset  
 Protection : 16A resettable fuse or 16A hydraulic MCB x 2  
 Circuit Details : < **Circuit A** > Output 16A max. C 13 # 1-18 + C 19 # C1-C3  
 < **Circuit B** > Output 16A max. C 13 # 19-36 + C 19 # C4-C6

### Single phase metered PDU

Outlet : 10A Rated IEC320 C13 x 36  
16A Rated IEC320 C19 x 6

**AUSTIN HUGHES** Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2018 Austin Hughes Electronics Ltd. All rights reserved.

### Meter Features ( MD metered PDU )

Local Display : 3-digit LED ammeter measuring input load current  
 Measurement : Current ( A )  
 Accuracy : ± ( 3% of the reading + 5 digits ) RMS

EMC Compliance : FCC & CE certified  
 Safety Compliance : CE / LVD certified  
 Environment Compliance : RoHS2 & REACH

Operating Temperature : -5 to 60 °C  
 Storage Temperature : -25 to 65 °C  
 Operating Altitude : 0 to 2,000 m  
 Storage Altitude : 0 to 15,000 m  
 Humidity : 8 to 95% RH, non-condensing

Dimension : 54 (W) x 80 (D) x 1650 (H) mm  
 Material : Extrusion  
 Color : Black