


1-Phase 10A / 16A / 20A metered PDU : C13 x 16 + C19 x 4



20A model :	Fuse	MCB
V16C13/4C19-20A-MD/F_OE/3B-1	1	-
V16C13/4C19-20A-MD/CR_OE/3B-1	-	1

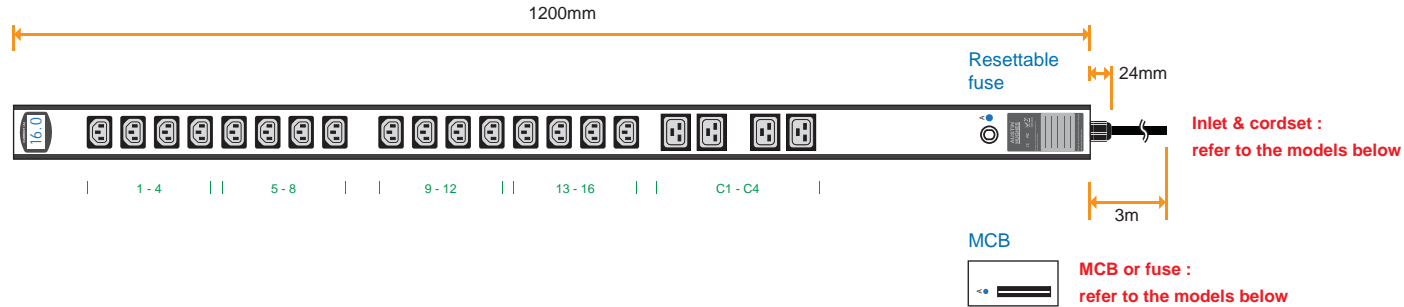

Input Rating : 20A, 230V
Inlet : 20A open end
Cordset : 3 meter 2.5mm sq. H05V V-F cordset
Protection : 20A resettable fuse or 20A hydraulic MCB x 1
Circuit Details : Output 20A max. C 13 # 1 - 16 + C 19 # C 1 - C 4

16A model :	Fuse	MCB
V16C13/4C19-16A-MD/F_EN/3B-1	1	-
V16C13/4C19-16A-MD/CR_EN/3B-1	-	1



Input Rating : 16A, 230V
Inlet : 16A IEC60309 2P+E plug
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 1
Circuit Details : Output 16A max. C 13 # 1 - 16 + C 19 # C 1 - C 4

16A model :	Fuse	MCB
V16C13/4C19-16A-MD/F_C20/3B-1	1	-
V16C13/4C19-16A-MD/CR_C20/3B-1	-	1



Input Rating : 16A, 230V
Inlet : 16A IEC320 C20 plug
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 1
Circuit Details : Output 16A max. C 13 # 1 - 16 + C 19 # C 1 - C 4

10A model :	Fuse	MCB
V16C13/4C19-10A-MD/F_C14/3B-1	1	-
V16C13/4C19-10A-MD/CR_C14/3B-1	-	1



Input Rating : 10A, 230V
Inlet : 10A IEC320 C14 plug
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 10A resettable fuse or 10A hydraulic MCB x 1
Circuit Details : Output 10A max. C 13 # 1 - 16 + C 19 # C 1 - C 4

Single phase metered PDU

Outlet : 10A Rated IEC320 C13 x 16
16A Rated IEC320 C19 x 4

AUSTIN HUGHES
Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2018 Austin Hughes Electronics Ltd. All rights reserved.

Meter Features (MD metered PDU)

Local Display : 3-digit LED ammeter measuring input load current
Measurement : Current (A)
Accuracy : ± (3% of the reading + 5 digits) RMS

EMC Compliance : FCC & CE certified
Safety Compliance : CE / LVD certified
Environment Compliance : RoHS2 & REACH

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing

Dimension : 60 (W) x 60 (D) x 1200 (H) mm
Material : Extrusion
Color : Black