


PDU specification drawing

1-Phase 230V 10A / 13A / 16A / 20A basic PDU : UK x 8



20A model :	Fuse	MCB
V8UK45-20A-OE/3B-1	-	-

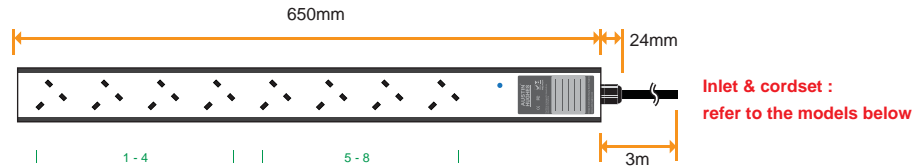

Input Rating : 20A, 230V
Inlet : 20A open end
Cordset : 3 meter 2.5mm sq. H05V V-F cordset
Protection : NIL
Circuit Details : Output 20A max. U K # 1 - 8

16A model :	Fuse	MCB
V8UK45-16A-EN/3B-1	-	-



Input Rating : 16A, 230V
Inlet : 16A IEC60309 2P+E plug
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : NIL
Circuit Details : Output 16A max. U K # 1 - 8

16A model :	Fuse	MCB
V8UK45-16A-C20/3B-1	-	-



Input Rating : 16A, 230V
Inlet : 16A IEC320 C20 plug
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : NIL
Circuit Details : Output 16A max. U K # 1 - 8

13A model :	Fuse	MCB
V8UK45-13A-BS/3B-1	-	-



Input Rating : 13A, 230V
Inlet : 13A BS1363 plug
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : NIL
Circuit Details : Output 13A max. U K # 1 - 8

10A model :	Fuse	MCB
V8UK45-10A-C14/3B-1	-	-



Input Rating : 10A, 230V
Inlet : 10A IEC320 C14 plug
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : NIL
Circuit Details : Output 10A max. U K # 1 - 8

Single phase basic PDU

Outlet : 13A Rated BS1363 x 8



The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2015 Austin Hughes Electronics Ltd. All rights reserved.

EMC Compliance : FCC & CE certified
Safety Compliance : CE / LVD certified
Environment Compliance : RoHS2 & REACH

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing

Dimension : 60 (W) x 60 (D) x 650 (H) mm
Material : Extrusion
Color : Black