

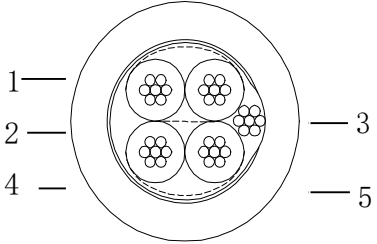
## TECHNICAL DATA SHEET

CABLE REFERENCE : 9502 LSF GRY

ISSUE NO. : 1

ISSUE DATE : AUG 20, 2013

### CABLE CONSTRUCTION

<b>Type</b>	9502 LSFGRY				
<b>Test Standard</b>	UL1581				
<b>1. Conductor</b>	Material	Stranded Tinned Copper			
	Nom.O.D.(mm)	0.20×7	Up		+0.008
			Down		-0.008
<b>2. Insulation</b>	Material	FR-PVC			
	Diameter	1.10(+/-0.13)mm×2×2			
	Colours	(Red, Black)/(White, Black)			
<b>3. Drain</b>	Material	Stranded Tinned Copper			
	Nom.O.D.(mm)	0.20×7	Up		+0.008
			Down		-0.008
<b>4. Shield</b>	Material	AL-foil			
	Colour	blue			
<b>5. Jacket</b>	External O.D.	4.60(+/-0.20)mm			
	Surface	Clean,Smooth			
	Material	LSF-PVC			
	Colour	Grey			
<b>Electrical Characteristics</b>	Item		Standard		
	Conductor Resistance @ 20C		< 9.41 Ω/100M		
	Min.Insulation DC Resistance @ 20C		>200MΩ*M		
	Rated Volage		300V		
	Rated Temperature		80°C		



Information in this data sheet supplied to users is based on general experience and is given in good faith, but because of the many particular factors which are outside our knowledge which affect the use of the products, no warranty is given nor is to be implied with respect to such information. Users should make their own enquiries to determine the stability of products for any particular use.