

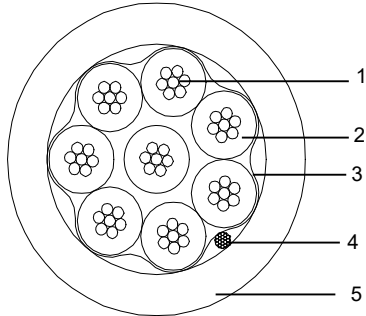
TECHNICAL DATA SHEET

CABLE REFERENCE : 9538 LSF GRY

ISSUE NO. : 1

ISSUE DATE : AUG 15, 2013

CABLE CONSTRUCTION

Type	9538 LSF GRY						
Test Standard	UL1581						
1. Conductor	Material	Stranded Tinned Copper					
	Nom.O.D.(mm)	0.20×7	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50px;">Up</td> <td>+0.008</td> </tr> <tr> <td>Down</td> <td>-0.008</td> </tr> </table>		Up	+0.008	Down
Up	+0.008						
Down	-0.008						
2. Insulation	Material	FR-PVC					
	Diameter	1.10(+/-0.13)mm×8					
	Colours	Red, Blue, Black, White, Orange, Brown, Green, Yellow					
3. Shield	Material	AL-foil					
	Colour	Blue					
4. Drain	Material	Stranded Tinned Copper					
	Nom.O.D.(mm)	0.20×7	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50px;">Up</td> <td>+0.008</td> </tr> <tr> <td>Down</td> <td>-0.008</td> </tr> </table>	Up	+0.008	Down	-0.008
Up	+0.008						
Down	-0.008						
5. Jacket	External O.D.	4.90(+/-0.20)mm					
	Surface	Clean, Smooth					
	Material	LSF-PVC					
	Colour	Grey					
Electrical Characteristics	Item		Standard				
	Conductor Resistance @ 20C		< 9.41 Ω/100M				
	Min.Insulation DC Resistance @ 20C		>200MΩ*M				
	Rated Volage		300V				
	Rated Temperature		80°C				



Information in this data sheet supplied to users is based on general experience and is given in good faith, but because of the many particular factors which are outside our knowledge which affect the use of the products, no warranty is given nor is to be implied with respect to such information. Users should make their own enquiries to determine the stability of products for any particular use.