

TECHNICAL DATA SHEET


CABLE REFERENCE :9540 LSF GREY

ISSUE NO. : 1

ISSUE DATE : APR. 17, 2013

CABLE CONSTRUCTION

Type	9540 LSF GREY			
Test Standard	UL1581,UL758			
1. Conductor	Material	Stranded Tinned copper		
	Nom.O.D.(mm)	0.203×7	Up	+0.008
			Down	-0.008
2. Insulation	Material	FR-PVC		
	Diameter	1.12(+/-0.13)mm×10		
	Colours	Brown, Blue, Black, Green, Grey, Purple, Red, Yellow, White, Orange		
3. Shield	Material	Al-foil		
	Colour	Blue		
4. Drain wire	Material	Stranded Tinned copper		
	Nom.O.D.(mm)	0.203×7	Up	+0.008
			Down	-0.008
5. Rip-cord	Material	Rip-cord		
6. Jacket	Extenal O.D.	6.20(+/-0.25)mm		
	Surface	Clean, Smooth		
	Material	LSF-PVC		
	Colour	Grey		
Electrical Characteristics	Item		Standard	
	Conductor Resistance @ 20C		< 9.13 Ω/100M	
	Min.Insulation DC Resistance @ 20C		>200 MΩ*M	
	Rated Volage		300V	
Rated Temperature		80°C		

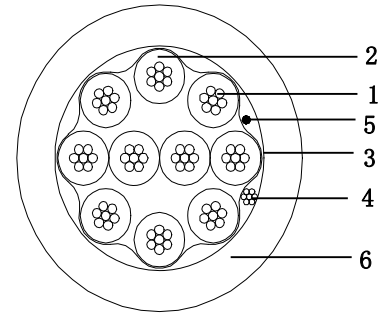

Information in this data sheet supplied to users is based on general experience and is given in good faith, but because of the many particular factors which are outside our knowledge which affect the use of the products, no warranty is given nor is to be implied with respect to such information. Users should make their own enquiries to determine the stability of products for any particular use.