

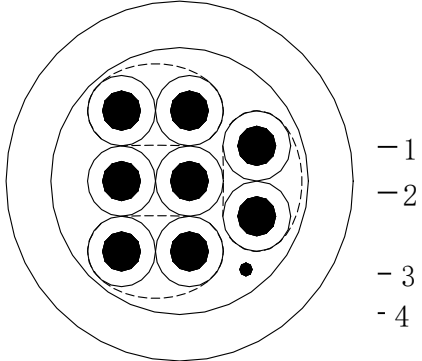
TECHNICAL DATA SHEET

CABLE REFERENCE : CW1308 4PR

ISSUE NO. : 1

ISSUE DATE : 2 MAR, 2012.

CABLE CONSTRUCTION

Category Type	CW1308 4PR						
Test Standard	UL1581						
1. Conductor	Material	Solid Bare Copper					
	Nom.O.D.(mm)	0.4	<table border="1" style="margin-left: 20px;"> <tr> <td>Up</td> <td>+0.010</td> </tr> <tr> <td>Down</td> <td>-0.010</td> </tr> </table>		Up	+0.010	Down
Up	+0.010						
Down	-0.010						
2. Insulation	Material	FR-PVC					
	Diameter	0.90(+/-0.10)x2x4					
Color	white/orange, orange/white, blue/white, white/blue, green/white, white/green, brown/white, white/brown						
3. Rip-Cord	Material	Nylon					
	Color	White					
4. Jacket	External O.D.mm	4.60(+/-0.20)					
	Surface	Clean, Smooth					
	Material	LSF-PVC					
	Color	white					
CHARACTERISTICS	Item	Description	Standard				
	1. Cond. Resistance	20°C, Conductor DC Resistance	< 10.54 Ω/100M				
	2. Min. Insulation DC Resistance	20°C, Insulation DC Resistance	>200 MΩ*M				
	3. Rated Volage	300v				
	4. Rated Temperature	80°C				

Reach



Information in this data sheet supplied to users is based on general experience and is given in good faith, but because of the many particular factors which are outside our knowledge which affect the use of the products, no warranty is given nor is to be implied with respect to such information. Users should make their own enquiries to determine the stability of products for any particular use.