

## Automatic Transfer Switch : C13 x 8


Front view :



Rear view :



Top View :

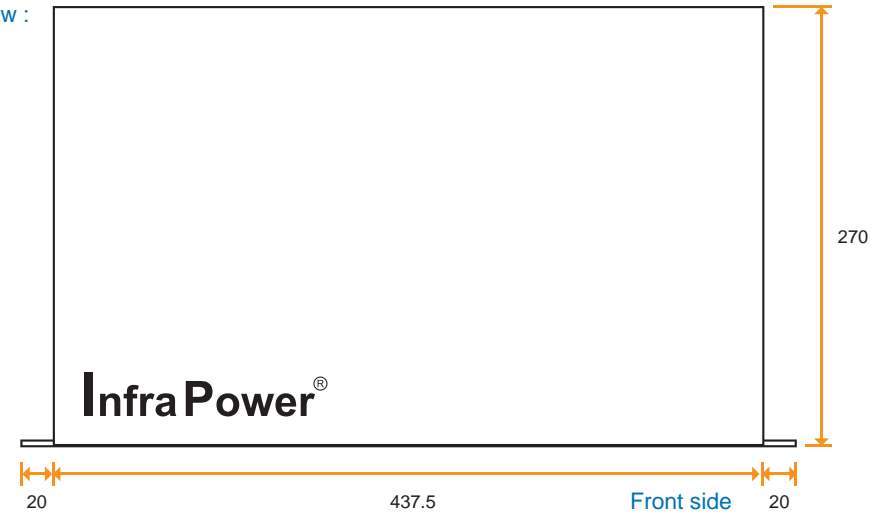

16A model :	Fuse	MCB
ATS-H8C13-16A_EN/3B-1	-	1



Input Rating : 16A, 200 ~ 230V  
 Inlet : 16A IEC60309 2P+E plug x 2  
 Cordset : 3 meter 1.5mm sq. H05V V-F cordset x 2  
 Protection : 16A hydraulic MCB x 1  
 Circuit Details : Output 16A max. C 13 # 1 - 8

16A model :	Fuse	MCB
ATS-H8C13-16A_C20/3B-1	-	1



Input Rating : 16A, 200 ~ 230V  
 Inlet : 16A IEC320 C20 plug x 2  
 Cordset : 3 meter 1.5mm sq. H05V V-F cordset x 2  
 Protection : 16A hydraulic MCB x 1  
 Circuit Details : Output 16A max. C 13 # 1 - 8

10A model :	Fuse	MCB
ATS-H8C13-10A_C14/3B-1	-	1



Input Rating : 10A, 200 ~ 230V  
 Inlet : 10A IEC320 C14 plug x 2  
 Cordset : 3 meter 1.5mm sq. H05V V-F cordset x 2  
 Protection : 10A hydraulic MCB x 1  
 Circuit Details : Output 10A max. C 13 # 1 - 8

**Automatic transfer switch**  
 Outlet : 10A Rated IEC320 C13 x 8

**AUSTIN HUGHES** Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2015 Austin Hughes Electronics Ltd. All rights reserved.

**ATS Specification :**  
 Local meter : 3-digit LED current meter  
 Nominal input voltage : 200 ~ 230V  
 Acceptable input voltage : ±10% nominal  
 Input frequency : 50 / 60Hz  
 Transfer time : 10 - 16ms typical  
 Electrical endurance : 1 x 10<sup>5</sup> operations  
 Power consumption : Approx. 8VA

EMC Compliance	:	FCC & CE certified
Safety Compliance	:	CE / LVD certified
Environment Compliance	:	RoHS2 & REACH
Operating Temperature	:	-5 to 60 °C
Storage Temperature	:	-25 to 65 °C
Operating Altitude	:	0 to 2,000 m
Storage Altitude	:	0 to 15,000 m
Humidity	:	8 to 95% RH, non-condensing
Dimension	:	437.5 (W) x 270 (D) x 44.5 (H) mm
Material	:	Steel
Color	:	Black ( chassis )