



230V 16A ATS specification drawing

Automatic Transfer Switch : C13 x 16 + C19 x 2


Front view :

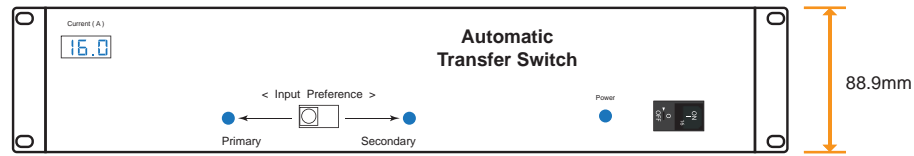

Rear view :

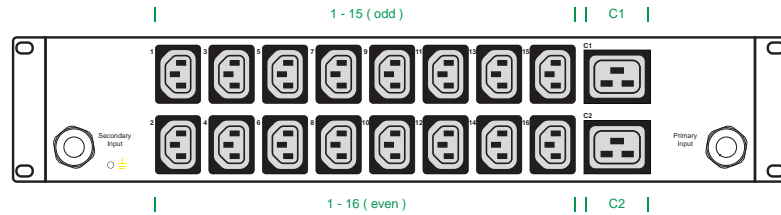

Top View :

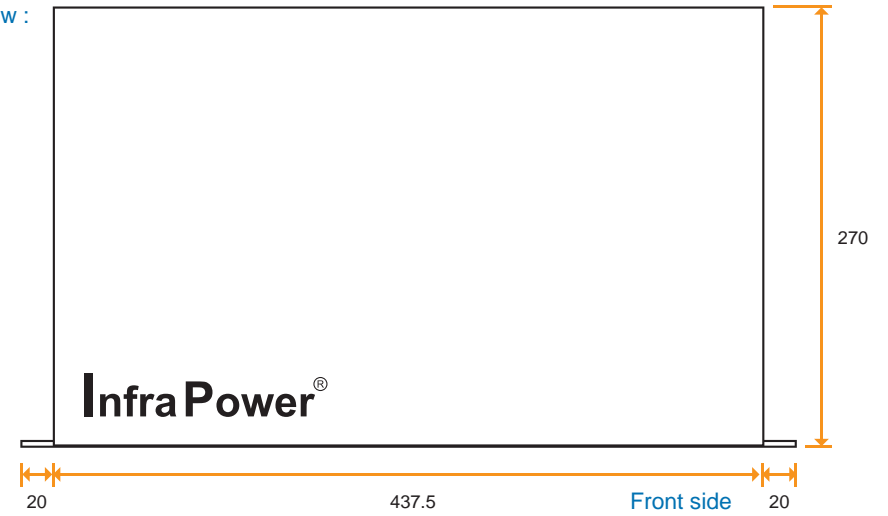

16A model :	Fuse	MCB
ATS-H16C13/2C19-16A_EN/3B-1	-	1



Input Rating : 16A, 200 ~ 230V
 Inlet : 16A IEC60309 2P+E plug x 2
 Cordset : 3 meter 1.5mm sq. H05V V-F cordset x 2
 Protection : 16A hydraulic MCB x 1
 Circuit Details : Output 16A max. C 13 # 1 - 16 + C 19 # C1 - C2

16A model :	Fuse	MCB
ATS-H16C13/2C19-16A_C20/3B-1	-	1



Input Rating : 16A, 200 ~ 230V
 Inlet : 16A IEC320 C20 plug x 2
 Cordset : 3 meter 1.5mm sq. H05V V-F cordset x 2
 Protection : 16A hydraulic MCB x 1
 Circuit Details : Output 16A max. C 13 # 1 - 16 + C 19 # C1 - C2

Automatic transfer switch
 Outlet : 10A Rated IEC320 C13 x 16
 16A Rated IEC320 C19 x 2

AUSTIN HUGHES
 Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2015 Austin Hughes Electronics Ltd. All rights reserved.

ATS Specification :

Local meter : 3-digital LED current meter
 Nominal input voltage : 200 ~ 230V
 Acceptable input voltage : ±10% nominal
 Input frequency : 50 / 60Hz
 Transfer time : 10 - 16ms typical
 Electrical endurance : 1 x 10⁵ operations
 Power consumption : Approx. 8VA

EMC Compliance : FCC & CE certified
 Safety Compliance : CE / LVD certified
 Environment Compliance : RoHS2 & REACH

Operating Temperature : -5 to 60 °C
 Storage Temperature : -25 to 65 °C
 Operating Altitude : 0 to 2,000 m
 Storage Altitude : 0 to 15,000 m
 Humidity : 8 to 95% RH, non-condensing

Dimension : 437.5 (W) x 270 (D) x 88.9 (H) mm
 Material : Steel
 Color : Black (chassis)