




Front view :



Top View :

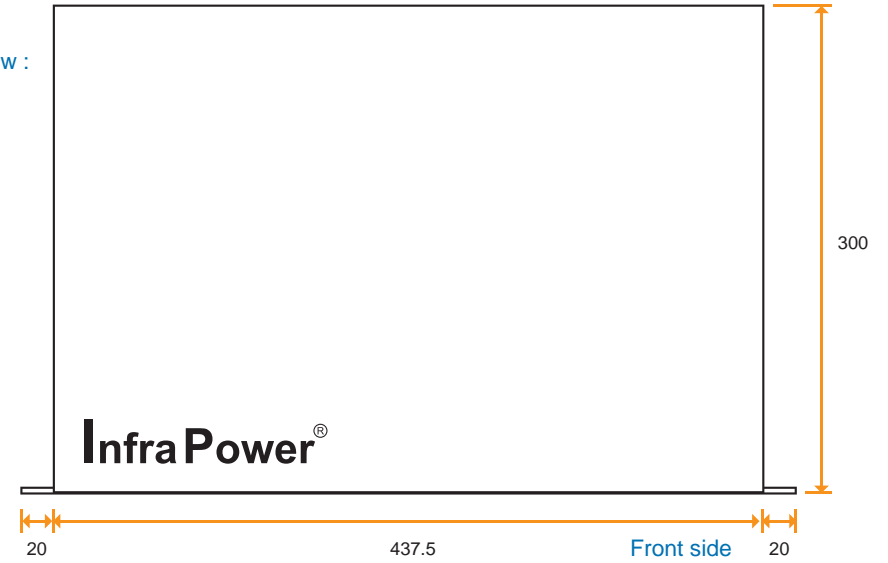

Rear view :



20A model :	Fuse	MCB
ATS-H12C13-20A-W_OE	-	1



20 Amp
Open end

Input Rating : 20A, 230V
Inlet : 20A open end x 2
Cordset : 3 meter 2.5mm sq. H05V V-F cordset x 2
Protection : 20A hydraulic MCB x 1
Circuit Details : Output 20A max. C 13 # 1 - 12

16A model :	Fuse	MCB
ATS-H12C13-16A-W_EN	-	1



IEC 60309
16A 2P+E PLUG

Input Rating : 16A, 230V
Inlet : 16A IEC60309 2P+E plug x 2
Cordset : 3 meter 1.5mm sq. H05V V-F cordset x 2
Protection : 16A hydraulic MCB x 1
Circuit Details : Output 16A max. C 13 # 1 - 12

16A model :	Fuse	MCB
ATS-H12C13-16A-W_C20	-	1



16 Amp
IEC320 C20

Input Rating : 16A, 230V
Inlet : 16A IEC320 C20 plug x 2
Cordset : 3 meter 1.5mm sq. H05V V-F cordset x 2
Protection : 16A hydraulic MCB x 1
Circuit Details : Output 16A max. C 13 # 1 - 12

10A model :	Fuse	MCB
ATS-H12C13-10A-W_C14	-	1



10 Amp
IEC320 C14

Input Rating : 10A, 230V
Inlet : 10A IEC320 C14 plug x 2
Cordset : 3 meter 1.5mm sq. H05V V-F cordset x 2
Protection : 10A hydraulic MCB x 1
Circuit Details : Output 10A max. C 13 # 1 - 12

Automatic transfer switch
Outlet : 10A Rated IEC320 C13 x 12

AUSTIN HUGHES
Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2018 Austin Hughes Electronics Ltd. All rights reserved.

ATS Specification :
Nominal input voltage : 230V
Acceptable input voltage : ±10% nominal
Input frequency : 50 / 60Hz
Transfer time : 10 - 14ms typical
Electrical endurance : 1 x 10⁵ operations
Power consumption : Approx. 20W

Meter Features
Local Display : 1.8" color LCD
Measurement : Voltage (V), Current (A), energy (kWh) & power factor
Accuracy : ±1% true RMS
IP Access : via built-in IP dongle for network access
SNMP : V2 / V3 version, via built-in IP dongle

EMC Compliance : FCC & CE certified
Safety Compliance : CE / LVD certified
Environment Compliance : RoHS2 & REACH
Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing
Dimension : 437.5 (W) x 300 (D) x 44.5 (H) mm
Material : Steel
Color : Black (chassis)