

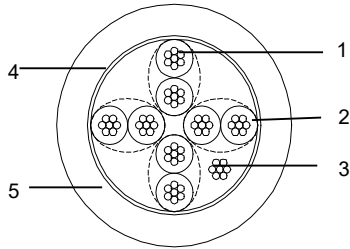
## TECHNICAL DATA SHEET

CABLE REFERENCE : 9504 LSF GRY

ISSUE NO. : 1

ISSUE DATE : AUG. 12, 2013

### CABLE CONSTRUCTION

<b>Type</b>	9504 LSF GRY			
<b>Test Standard</b>	UL1581			
<b>1. Conductor</b>	Material	Stranded Tinned Copper		
	Nom.O.D.(mm)	0.20×7	Up +0.008	
	Down -0.008			
<b>2. Insulation</b>	Material	FR-PVC		
	Diameter	1.05(+/-0.13)mm×2×4		
	Colours	(White, Black)/(Green, Black)/ (Red, Black)/Blue, Black)		
<b>3. Drain</b>	Material	Stranded Tinned Copper		
	Nom.O.D.(mm)	0.20×7	Up +0.008	
	Down -0.008			
<b>4. Shield</b>	Material	AL-foil		
	Colour	blue		
<b>5. Jacket</b>	External O.D.	5.30(+/-0.20)mm		
	Surface	Clean, Smooth		
	Material	LSF-PVC		
	Colour	Grey		
<b>Electrical Characteristics</b>	Item		Standard	
	Conductor Resistance @ 20C		< 9.41 Ω/100M	
	Min.Insulation DC Resistance @ 20C		>200MΩ*M	
	Rated Volage		300V	
	Rated Temperature		80°C	



Information in this data sheet supplied to users is based on general experience and is given in good faith, but because of the many particular factors which are outside our knowledge which affect the use of the products, no warranty is given nor is to be implied with respect to such information. Users should make their own enquiries to determine the stability of products for any particular use.