

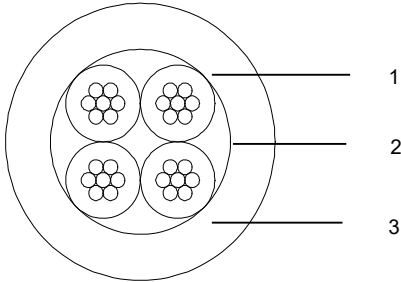
TECHNICAL DATA SHEET

CABLE REFERENCE : 8444 LSF

ISSUE NO. : 1

ISSUE DATE : 18 NOV., 2011.

CABLE CONSTRUCTION

Type	8444 LSF						
Test Standard	UL1581,UL758						
1. Conductor	Material	STRANDED-Tinned Coppe					
	Nom.O.D.(mm)	7×0.254	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Up</td> <td style="width: 50%;">+0.008</td> </tr> <tr> <td>Down</td> <td>-0.01</td> </tr> </table>		Up	+0.008	Down
Up	+0.008						
Down	-0.01						
2. Insulation	Material	PVC					
	Diameter	1.30(+/-0.13)mm×4					
	Colours	Black, White, Red, Green					
3. Jacket	External O.D.	4.7(+/-0.20)mm					
	Surface	Clean, Smooth					
	Material	LSF					
	Colour	Grey					
Electrical Characteristics	Item	Standard					
	Conductor Resistance @ 20C	< 5.83 Ω/100M					
	Min.Insulation DC Resistance @ 20C	200 MΩ*M					
	Rated Voltage	300V					
	Rated Temperature	80°C					



Information in this data sheet supplied to users is based on general experience and is given in good faith, but because of the many particular factors which are outside our knowledge which affect the use of the products, no warranty is given nor is to be implied with respect to such information. Users should make their own enquiries to determine the stability of products for any particular use.