


Cat8 24 Port Patch Panel

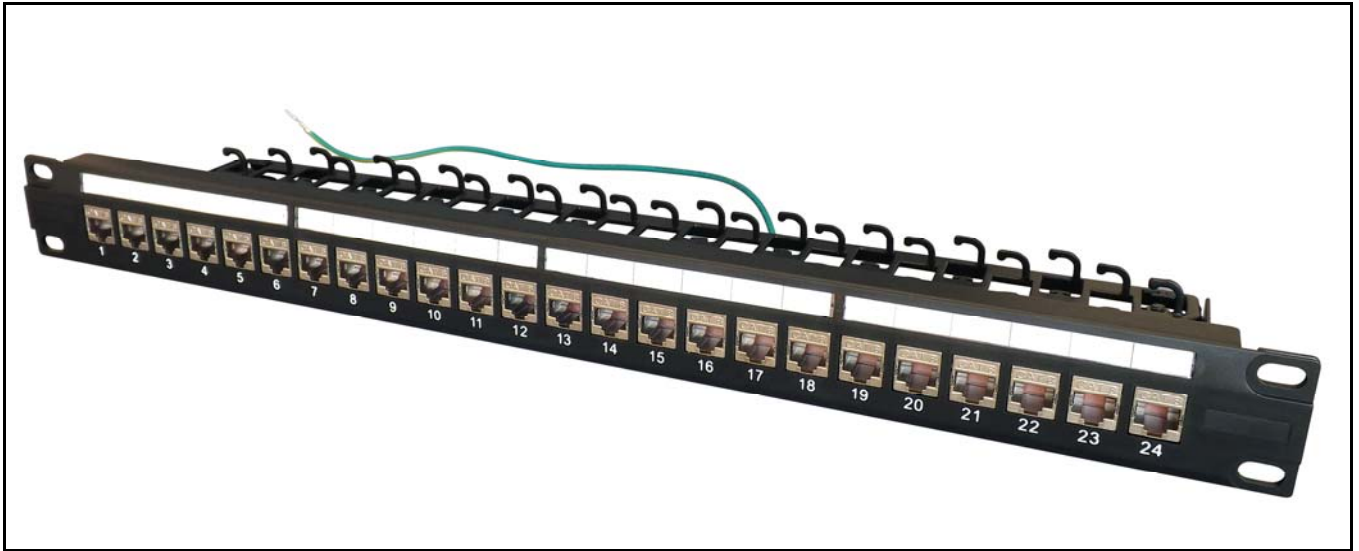

Cat8 24 Port Patch Panel

This Cat8 panel offers outstanding performance with shielded modular ports and integral cable management

Features

- Transmission performance in compliance with the ANSI/TIA 568-C.2-1 specifications for Cat8 cabling systems (i. e. suitable for runs of 5-30 metres) to Permanent Link standard
- Compliant with IEC60512-99-001 – suitable for use with IEEE 802.3at (PoE+) applications
- Connectors provide quick and easy tool-less lever “butterfly style” termination
- Suitable for 0.51-0.65mm/ 22-24AWG stranded and solid wire
- 19" rack mounting
- Clear numbering on the front provides a quick, easy way to identify cable run
- ‘Slip-in’ label facility for port identification
- Removable metal rear cable management with earth wire

Specifications

- Weight: 1450g (approx.)
- Dimensions: 482 x 44 x 107mm (approx.)
- Colour: black

Materials

Cat8 Keystone Jacks

- Body: nickel-plated die-cast zinc
- RJ45 contacts: 50 μ "/1.27 μ m gold-plated phosphor bronze
- IDC contacts: tin-plated phosphor bronze

Tape: copper foil

Panel

- Front: Black coated cold rolled steel
- Rear: Zinc coated cold rolled steel
- Cable management bar: Black coated cold rolled steel