


# UC500 S27 Cat.6A

## U/FTP Patch Cable

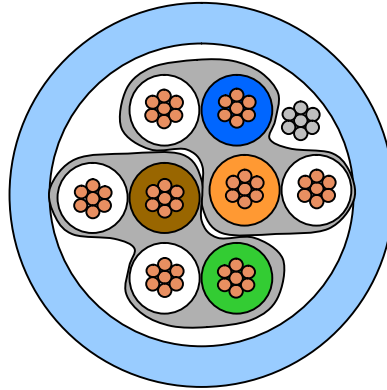

## Application

Work area and patch cord cable  
IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T;  
IEEE 802.5 16 MB; ISDN; TPDDI; ATM

## Standards

EN 50173-1; EN 50288-5-2  
ISO/IEC 11801; IEC 61156-6  
TIA/EIA-568-B.2

## Flame resistance

LSHF: IEC 60332-1; IEC 60754-2; IEC 61034

## Construction

Conductor	stranded bare copper wire $\varnothing$ 0.42 mm (AWG27)
Insulation	Foam Skin Polyethylene, $\varnothing$ 0.98 mm
Twisting	2 cores to the pair
Cable lay up	4 pairs to the core
Screen	STP: Al-laminated plastic foil, patented wrapping of two pairs each, stranded drain wire AWG26 tinned
Sheath	LSHF(LSOH)

## Mechanical properties

Bending radius	without load	$\geq 25$ mm
	with load	$\geq 50$ mm
Temperature range	during operation	-20°C to + 60°C
	during installation	0°C to + 50°C

## UC500 S27 Cat.6A

### Electrical properties

at 20°C ± 5°C

Loop resistance		≤ 340 Ω/km
Resistance unbalance		≤ 3%
Insulation resistance	(500 V)	≥ 2000 MΩ*km
Mutual capacitance	at 800 Hz	Nom. 43 nF/km
Capacitance unbalance	(pair/ground)	≤ 1500 pF/km
Mean characteristic impedance	100 MHz	100 ± 5 Ω
Nominal velocity of propagation		Ca.79 %
Propagation delay		≤ 427 ns/100m
Delay skew		≤ 12 ns/100m
Test voltage		1000 V
Transfer impedance	at 1 MHz	≤ 50 mΩ/m
	at 10 MHz	≤ 100 mΩ/m
	at 30 MHz	≤ 200 mΩ/m
Coupling attenuation		≥ 55 dB

### Electrical data (nominal)

acc. to Cat.6A (at 20°C)

F (MHZ)	Attenuation (dB/10m)	NEXT (dB)	PS-NEXT (dB)	ELFEXT (dB/100m)	PS-ELFEXT (dB/100m)	Return loss (dB)
1,0	0,3	87	84	75	72	23
4,0	0,7	78	75	75	72	23
10,0	1,0	72	69	75	72	23
16,0	1,3	69	66	71	68	23
20,0	1,5	68	65	69	66	23
31,2	1,8	65	62	65	62	23
62,5	2,6	60	57	59	56	23
100,0	3,3	57	54	55	52	23
125,0	3,6	56	53	53	50	21
155,5	4,1	54	51	51	48	21
175,0	4,3	53	50	50	47	21
200,0	4,6	53	50	49	46	21
250,0	5,1	51	48	47	44	20
300,0	5,6	50	47	45	42	20
400,0	6,5	48	45	43	40	18
500,0	7,3	46	43	40	37	18

### Product order data

Product code	Cable type	Brand name	Colour	Outer diameter mm	Fire load		Weight kg/km	Copper content	Tensile force N
					MJ/km	kWh/m			
1019004 1018934	Li-02YS(St)H 4x2x0.42L	UC500 S27 Cat.6A U/FTP 4P LSHF	green grey	5.7	342	0.090	27.5	12	50

## UC500 S27 Cat.6A

[PRODUCT CODE TABLE]

---

© PRYSMIAN GROUP 2009, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.