

ST-ST MULTIMODE OMI FIBRE OPTIC DUPLEX PATCH LEADS



Technical information

Ultima patch leads are manufactured to the highest standards and supplied individually bagged with its own test certificate. The transmit and receive leg of each duplex lead is clearly marked to allow for a quick install.

Features:

- ◆ Provides moveable links between sections of permanently installed horizontal cable
- ◆ Suitable for use in computer rooms, data centres and work areas
- ◆ Low Smoke Zero Halogen Jacket
- ◆ Tight Buffered Fibre with aramid yarn
- ◆ Full test certificate provided with each lead
- ◆ High quality build and performance
- ◆ Strain relief boots to protect fibre
- ◆ Dust caps provided to keep the fibre face clean
- ◆ Marked transmit and receive legs
- ◆ RoHS compliant construction

Performance and Characteristics


Max Attenuation (dB) 850nm	3.5
Max Attenuation (dB) 1300nm	1.5
Bandwidth OFL (MHz x km) @ 850nm	200
Bandwidth OFL (MHz x km) @ 1300nm	500
Insertion Loss (dB)	≤ 0.20
Return Loss (dB)	≥ 35
Temperature Range	-40°C to 75°C

Standards

ST Connector Standard	IEC 61754-4
-----------------------	-------------

Physicals

Sheath Diameter	Ø 3.0mm
Housing Colour	Silver
Boot Colour	Black/red

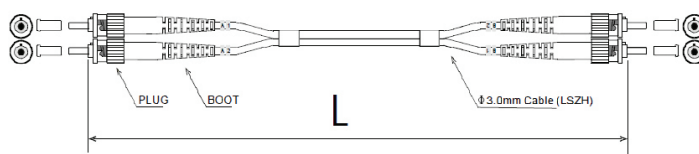

ST-ST MULTIMODE OM1 FIBRE OPTIC DUPLEX PATCH LEADS



Technical information

Part Numbers

	Item	Description	Mode	Length	Colour
OM1 62.5/125µm	782180	Fibre Patch Lead ST-ST	MM	1Mtr	Orange
	782182	Fibre Patch Lead ST-ST	MM	2Mtr	Orange
	782183	Fibre Patch Lead ST-ST	MM	3Mtr	Orange
	782185	Fibre Patch Lead ST-ST	MM	5Mtr	Orange
	772888	Fibre Patch Lead ST-ST	MM	1Mtr	Grey
	772925	Fibre Patch Lead ST-ST	MM	2Mtr	Grey
	772926	Fibre Patch Lead ST-ST	MM	3Mtr	Grey
	777552	Fibre Patch Lead ST-ST	MM	4Mtr	Grey
	772927	Fibre Patch Lead ST-ST	MM	5Mtr	Grey
	777553	Fibre Patch Lead ST-ST	MM	6Mtr	Grey
	777554	Fibre Patch Lead ST-ST	MM	7Mtr	Grey
	775886	Fibre Patch Lead ST-ST	MM	10Mtr	Grey
	782294	Fibre Patch Lead ST-ST	MM	15Mtr	Grey
	782299	Fibre Patch Lead ST-ST	MM	20Mtr	Grey