



CAT 6 SURFACE MOUNTED OUTLETS

Technical information



Features:



- ◆ Surface mounted outlets remove need for a back box
- ◆ Cat 6 compliant performance
- ◆ 568A and 568B wiring options
- ◆ Compatible with Ultima Euro faceplates
- ◆ 110 or LSA punch down
- ◆ Cable strain relief facility
- ◆ Supplied with mounting screws
- ◆ 25 year Ultima System Warranty

Materials

Housing	ABS, UL94V-0
RJ45 Jack Housing	PBT + Glass Fibre, UL94V-0
RJ45 Jack Contact	Phosphor bronze, nickel plated, finished with 50µ gold plating on plug contact area
IDC Housing	PC + Glass Fibre, UL94V-2
IDC Contact	Phosphor bronze, tin plated

Performance

Insertion Force	20N max.
Retention Strength	7.7kg between Jack and Plug
Operating Temperature	-10°C to 60°C
Mating Cycles	750 cycles min.
IDC Wire Range	22-26 AWG stranded or solid wire. Compatible with 110 and LSA punchdown tools

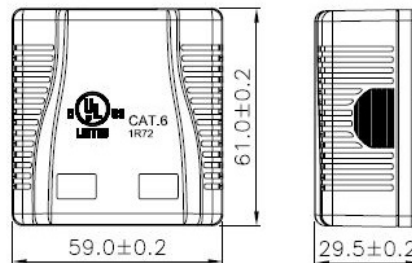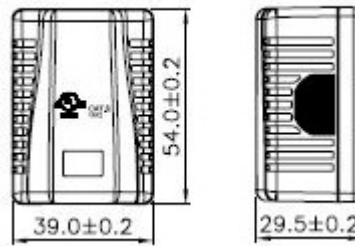

Part Number

Item	Description	Type	Style	Colour
789793	Cat 6 Surface Mount Outlet	Unshielded	Single Port	White
789794	Cat 6 Surface Mount Outlet	Unshielded	Dual Port	White