


FIBERLIGN® CAT. NO. -ADS00X
Preformed anchor clamps for drop cables

Applications

The anchor clamp Fiberlign® range of PLP- France has been developed to meet with new generations of ADSS cables having a micromodule structure. The radial force is distributed over a length with even pressure in order to minimize the strain on the cable and ensure long term performance life of optical fibers.

Legend

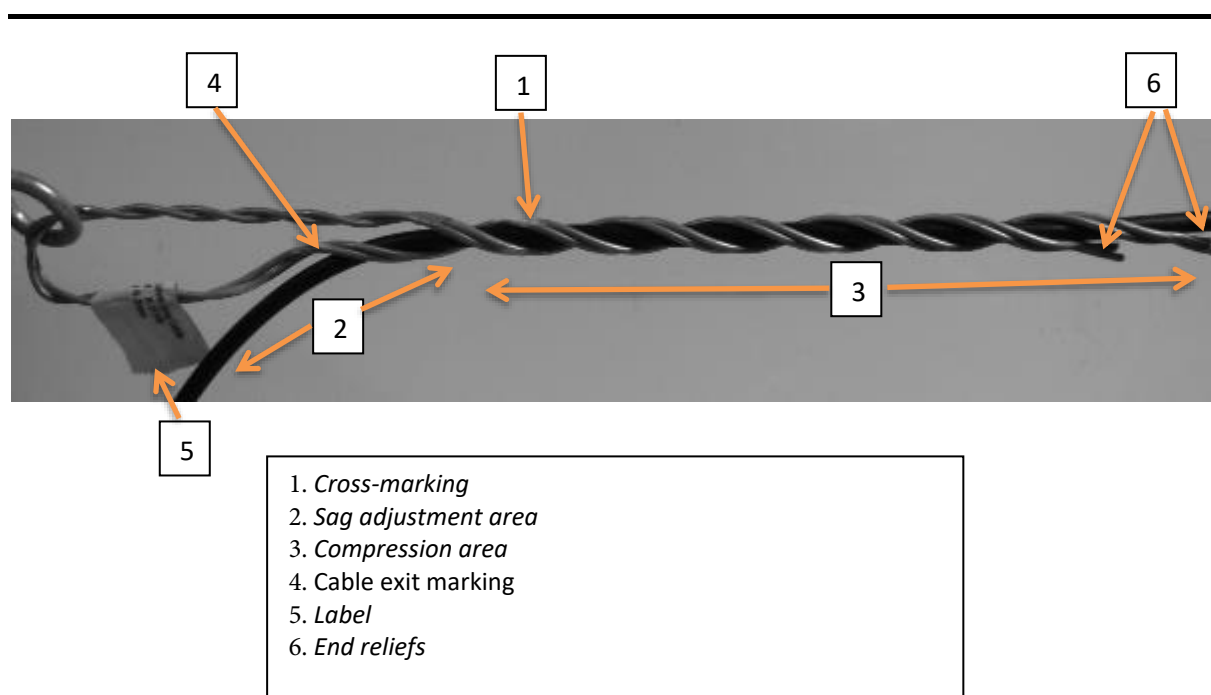

Product features

	ADS000	ADS001	ADS002
Diameter range (mm)	3,0 - 3,9	4,3 - 5	5,4 - 6,2
Maximum Allowable Tension (daN) ⁽¹⁾	80 daN	80 daN	80 daN
Electrical insulation	✓	✓	✓

Fiche Produit – *Product datasheet*

<i>UV resistant</i>	✓	✓	✓
<i>Number of pieces</i>	1	1	1
<i>Color code</i>	Orange	Bleu - Blue	Blanc - White
<i>Unit weight (kg)</i>	0,041	0,041	0,041
<i>Packaging</i>	100	100	100

The admissible traction may vary depending on the characteristics of the cable used. Contact the cable technician for the maximum tension forces applicable to the cables, as well as the tension and deflection levels for your complete system.

Additional information

- *Easy, quick and safe assembly*
- *User-friendly cable adjustment*
- *Assembly and disassembly without any tool*
- *UV treated*
- *Direct assembly on cross-arm.*
- *Lifetime over 30 years*