

LC-LC OS2 SIMPLEX PATCH LEADS



Technical information

Ultima fibre optic patch leads are manufactured to the highest standards and supplied individually bagged with their own test certificate. The transmit and receive leg of each duplex lead is clearly marked to allow for a quick install.

Features:

- ◆ Provide moveable links between sections of permanently installed horizontal cable
- ◆ Suitable for use in computer rooms, data centres and work areas
- ◆ Low Smoke Zero Halogen Jacket
- ◆ Tight Buffered Fibre with aramid yarn
- ◆ Full test certificate provided with each lead
- ◆ High quality build and performance
- ◆ Strain relief boots to protect fibre
- ◆ Dust caps provided to keep the fibre face clean
- ◆ Marked transmit and receive legs
- ◆ RoHS compliant construction

Performance & Characteristics


Max Attenuation (dB) 1310nm	0.4
Max Attenuation (dB) 1550nm	0.3
Max Chromatic Dispersion (ps/nm x km) @ 1310nm	3.0
Max Chromatic Dispersion (ps/nm x km) @ 1550nm	18.0
Temperature Range	-40°C to 75°C

Physicals

Diameter (mm)	2.0
Housing Colour	Blue
Boot Colour	White

Standards

LC Connector Standard	IEC 61754-20
-----------------------	--------------

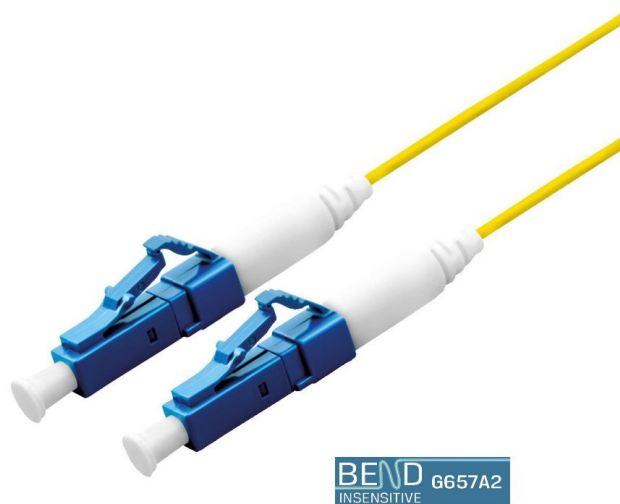

Part Numbers

	Item	Description	Style	Mode	Length	Colour
OS2 9/125µm	804391	Fibre Patch Lead LC-LC	Simplex	SM	0.5Mtr	Yellow
	804392	Fibre Patch Lead LC-LC	Simplex	SM	1Mtr	Yellow
	804393	Fibre Patch Lead LC-LC	Simplex	SM	1.5Mtr	Yellow
	804394	Fibre Patch Lead LC-LC	Simplex	SM	2Mtr	Yellow
	804395	Fibre Patch Lead LC-LC	Simplex	SM	3Mtr	Yellow