


760107318 | 3091B WH 4/23 W1000

**GigaSPEED X10D® 3091B ETL Verified Category 6A U/UTP Cable, white jacket, 4 pair count, 1000 ft (305 m) length, WE TOTE® box**

## Product Classification

Portfolio	SYSTIMAX®
Brand	GigaSPEED X10D®
Product Type	Twisted pair cable
Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America

## Cross Section Drawing

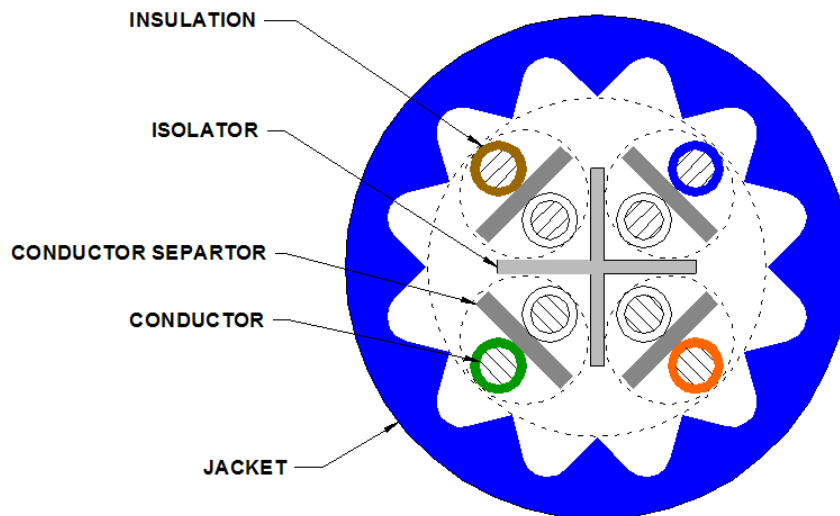

## Construction Materials

Jacket Material	Low Smoke Zero Halogen (LSZH)
Conductor Material	Bare copper
Insulation Material	Polyolefin
Separator Material	Polyolefin
Separator 2 Material	Polyolefin

## Dimensions

Cable Length	305 m   1000 ft
Cable Weight	36.90 lb/kft
Diameter Over Jacket	7.239 mm   0.285 in
Jacket Thickness	1.295 mm   0.051 in

## Electrical Specifications

ANSI/TIA Category	6A
dc Resistance Unbalance, maximum	4 %
dc Resistance, maximum	7.61 ohms/100 m
Mutual Capacitance	6.0 nF/100 m @ 1 kHz
Nominal Velocity of Propagation (NVP)	66 %
Operating Frequency, maximum	550 MHz
Operating Voltage, maximum	80 V
Transmission Standards	ANSI/TIA-568-C.2   ISO/IEC 11801 Class EA

## Environmental Specifications

Environmental Space	Low Smoke Zero Halogen (LSZH)
Smoke Test Method	IEC 61034-2
Acid Gas Test Method	IEC 60754-2
CPR Cable Classifications	EuroClass Dca   s2   d2   a1
Flame Test Method	IEC 60332-3-22
Installation Temperature	0 °C to +60 °C (+32 °F to +140 °F)
Operating Temperature	-20 °C to +60 °C (-4 °F to +140 °F)

## General Specifications

Cable Type	U/UTP (unshielded)
Packaging Type	WE TOTE® box
Pairs, quantity	4
Cable Component Type	Horizontal
Jacket Color	White
Product Number	3091B
Brand	GigaSPEED X10D®   SYSTIMAX®
Conductor Gauge, singles	23 AWG
Conductor Type, singles	Solid
Conductors, quantity	8
Separator Type	Isolator

## Mechanical Specifications

Pulling Tension, maximum	11 kg   25 lb
--------------------------	---------------

## Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system
BASEC EN50575	Compliant, DoP (Declaration of Performance) document available

