
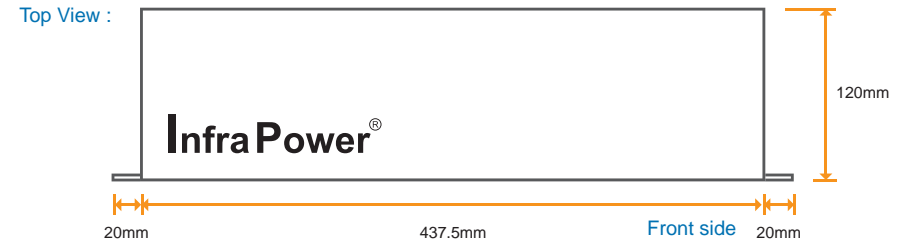


Date : 1 Jan 16
Version : V2

PDU specification drawing

InfraPower®

1-Phase 230V 32A basic PDU : C13 x 4 + C19 x 4



32A model :	Fuse	MCB
H4C13/4C19-32A-F_EN/3B-1	2	-
H4C13/4C19-32A-CR_EN/3B-1	-	2



Input Rating : 32A, 230V
 Inlet : 32A IEC60309 2P+E plug
 Cordset : 3 meter 4mm sq. H05V V-F cordset
 Protection : 16A resettable fuse or 16A hydraulic MCB x 2
 Circuit Details : < **Circuit A** > Output 16A max. C13 #1-3 (odd) + C19 #C1,C3
 < **Circuit B** > Output 16A max. C13 #2-4 (even) + C19 #C2,C4

Single phase basic PDU

Outlet : 10A Rated IEC320 C13 x 4
16A Rated IEC320 C19 x 4

AUSTIN HUGHES Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2015 Austin Hughes Electronics Ltd. All rights reserved.

EMC Compliance : FCC & CE certified
 Safety Compliance : CE / LVD certified
 Environment Compliance : RoHS2 & REACH

Operating Temperature : -5 to 60 °C
 Storage Temperature : -25 to 65 °C
 Operating Altitude : 0 to 2,000 m
 Storage Altitude : 0 to 15,000 m
 Humidity : 8 to 95% RH, non-condensing

Dimension : 437.5 (W) x 120 (D) x 44.5 (H) mm
 Material : Steel
 Color : Black (chassis)