

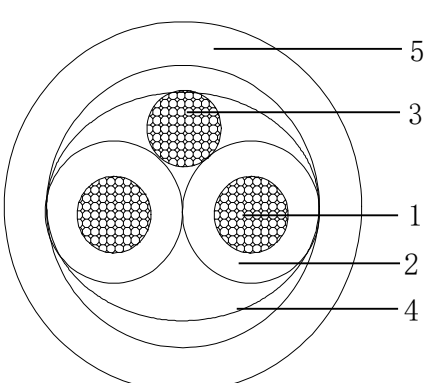
TECHNICAL DATA SHEET

CABLE REFERENCE : 8760 LSF GRY

ISSUE NO. : 1

ISSUE DATE : AUG 15, 2013

CABLE CONSTRUCTION

Type	8760 LSF GRY				
Test Standard	UL1581				
1. Conductor	Material	Stranded Tinned Copper			
	Nom.O.D.(mm)	0.25×16	Up	+0.008	
			Down	-0.008	
2. Insulation	Material	SPE			
	Diameter	2.15(+/-0.15)mm×2			
	Colours	Black, Transparent			
3. Drain	Material	Stranded Tinned Copper			
	Nom.O.D.(mm)	0.20×16	Up	+0.008	
			Down	-0.008	
4. Shield	Material	AL-foil			
	Colour	Blue			
5. Jacket	External O.D.mm	5.60(+/-0.20)			
	Surface	Clean, Smooth			
	Material	LSF-PVC			
	Colour	Grey			
Electrical Characteristics	Item		Standard		
	Conductor Resistance @ 20C		< 2.64 Ω/100M		
	Min.Insulation DC Resistance @ 20C		> 200 MΩ*M		
	Rated Volage		300V		
	Rated Temperature		-20°C to +80°C		



Information in this data sheet supplied to users is based on general experience and is given in good faith, but because of the many particular factors which are outside our knowledge which affect the use of the products, no warranty is given nor is to be implied with respect to such information. Users should make their own enquiries to determine the stability of products for any particular use.